

## SYSTEM W-S KIT TERRAZA

**DESCRIPTION:** Siphonic floor drain with bowl and integrated waterproofing quadrant, factory-assembled using a sheet of WATER-STOP waterproof membrane.

**USE:** Roof drainage and floor drain.

**STANDARDS:** UNE EN 1239-1 / UNE EN 1253-1 :2015

**MANUFACTURER:** ESTIL GURU S.L.U.

### REFERENCES:

REF.	DESCRIPTION	OUTLET
IE46000	KIT TERRAZA V90	VERTICAL OUTLET DN/OD 90
IE46001	KIT TERRAZA V110	VERTICAL OUTLET DN/OD 110
IE46002	KIT TERRAZA H90	HORIZONTAL OUTLET DN/OD 90
IE46003	KIT TERRAZA H110	HORIZONTAL OUTLET DN/OD 110



### TEST TABLE:

CHARACTERISTICS	METHOD	REQUIREMENT	VALUE
	EN STANDARD	EN STANDARD	
Discharge flow rate outlet 90	1253-1 Art. 5.9	1253-1 Art. 4.8.1	>0,8 l/s
Discharge flow rate outlet 110	1253-1 Art. 5.9	1253-1 Art. 4.8.1	>1,2 l/s
Watertightness of the membrane *1	1928 - B	Pressure : 0,1 MPa / 24h	Watertight
Openings in grate (dimensions)	1253-1 Art. 5.1	1253-1 Art. 4.1.3	Pass
Load resistance	1253-1 Art. 5.6	1253-1 Art. 4.7.1	Class L15
Materials	-	1253-1 Art. 4.3 and 1293-1	Pass

### COMPONENTS:

SYSTEM COMPONENT	COMPOSITION	DIMENSIONS	UNIT
Grate	PVC	200 x 200	mm
Drain		290 x 187	mm
Horizontal outlet nominal diameters		DN/OD 90 and DN/OD 110	mm
Vertical outlet nominal diameters		DN/OD 90 and DN/OD 110	mm
Waterproofing membrane	WATER-STOP	60 x 60	cm

### ADDITIONAL INFORMATION:


- » Connections to downpipe by gluing.
- » Hydraulic seal for odour prevention.
- » Possibility of installation with horizontal or vertical outlet depending on the model.

## NOTES AND OBSERVATIONS:


- » \*1 For information on the properties of the WATER-STOP membrane, please refer to its [TECHNICAL DATA SHEET](#).

## TECHNICAL DRAWINGS:

### VERTICAL OUTLET

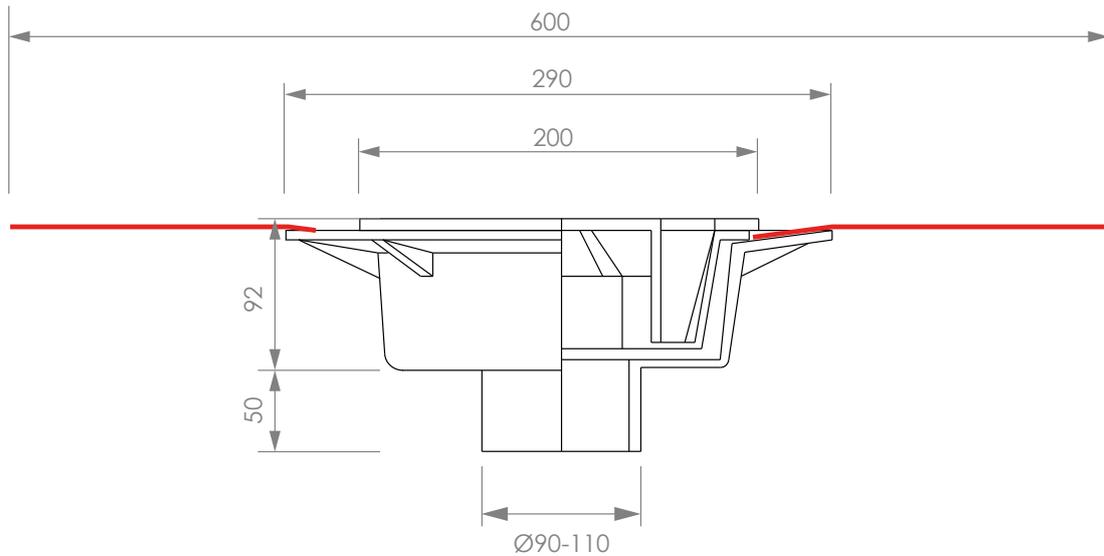

### HORIZONTAL OUTLET

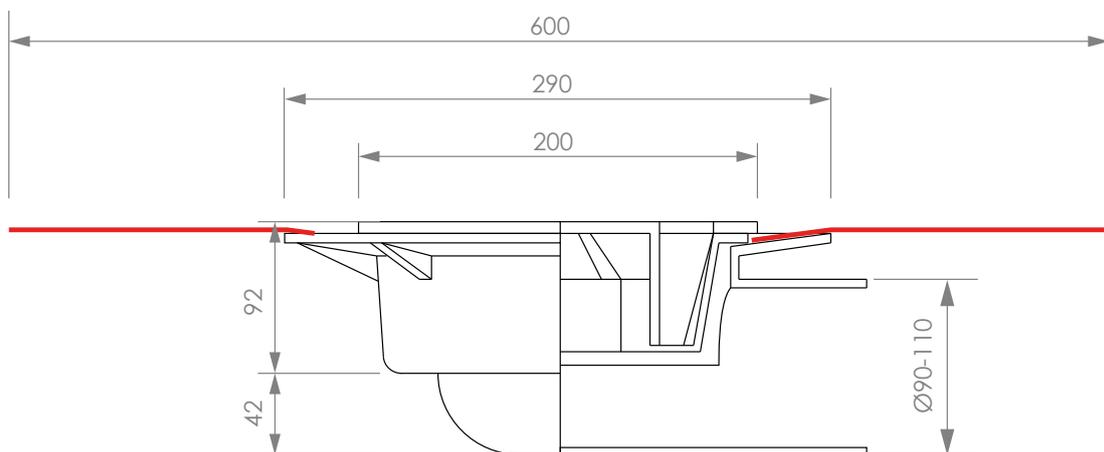

The data provided are for informational purposes only and may be subject to change without prior notice. It is strongly recommended to carry out any tests deemed necessary to verify the suitability of the product for the intended use when this differs from the information given.