

## W-S SINK

**DESCRIPTION:** Re-coverable sink manufactured with W-S BOARD.

**USE:** Undermount sink with standard 90 mm outlet.

**STANDARD:** UNE-EN 13310

**MANUFACTURER:** ESTIL GURU S.L.U.

**REFERENCES:**

REFS.	DESCRIPTION	DIMENSIONS
IM04001	W-S SINK	750 x 450 x 240 mm







**TEST TABLE:**

CHARACTERISTICS	METHOD	VALUE
External dimensions	-	85 x 45 x 24 cm
Internal dimensions	-	80 x 40 x 21,5 cm
Nominal density	ASTM C303	40 m <sup>3</sup>
Compressive strength	ASTM D1621	330 kPa
Resistance to fungal and mould growth	PS 106 - 5.5	Pass
Thermal resistance (RSI value)	ASTM C518	0,4 m <sup>2</sup> ·K/W
Reaction to fire classification	EN 13501-1	C s2 d0
Shear strength between tile and W-S BOARD surface:		
7-day drying	ASTM C482	0,82 N/mm <sup>2</sup>
7-day water immersion		0,57 N/mm <sup>2</sup>
4 weeks		0,92 N/mm <sup>2</sup>
12 weeks		0,95 N/mm <sup>2</sup>
100-day water immersion		0,59 N/mm <sup>2</sup>
Temperature resistance		-30°C / +80°C

## NOTES AND OBSERVATIONS:

The sink is not self-supporting. A supporting structure must be provided for its installation (not included). Under no circumstances should the sink be installed directly screwed or glued without a structure to bear its weight.

## TECHNICAL DRAWINGS:

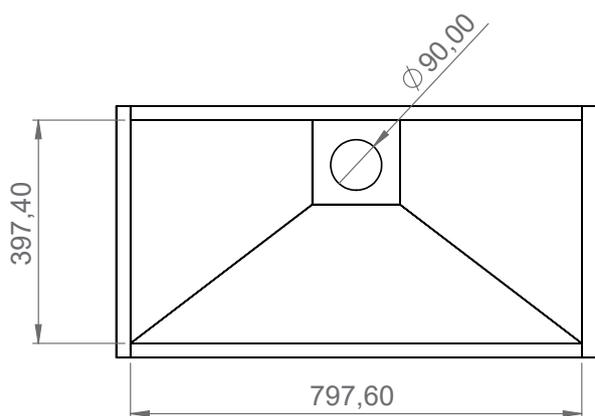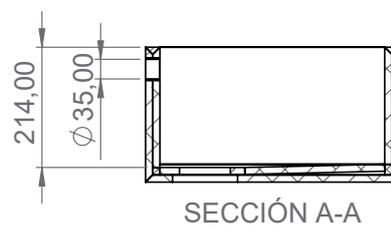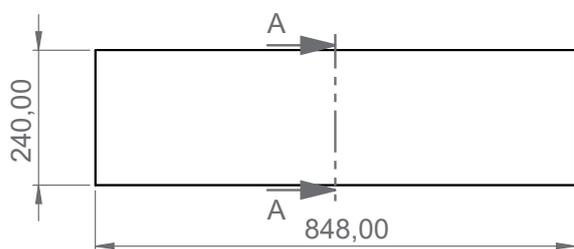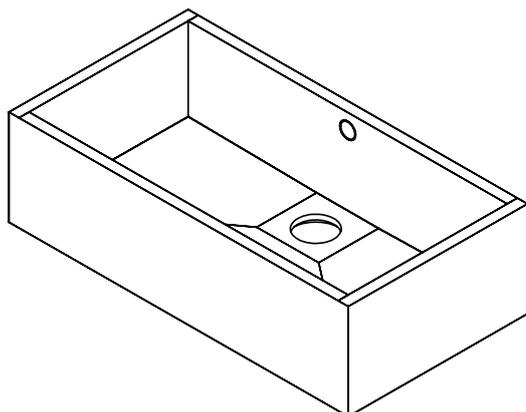

## INSTALLATION SECTION

