

# CATALOG 2025

**GEURU**<sup>®</sup>  
waterproofing products





**GURU**  
waterproofing products

**GURU**  
waterproofing products

CE CSTB  
LPC FILE 9999 - LPC FILE 9999

WATER-STOP  
A LAYER SUPERIOR TECHNOLOGY

**GURU**  
waterproofing products

**GURU**  
waterproofing products

WATER-STOP  
A LAYER SUPERIOR TECHNOLOGY

WATER-STOP  
A LAYER SUPERIOR TECHNOLOGY

**GURU**  
waterproofing products

WATER-STOP  
A LAYER SUPERIOR TECHNOLOGY

**GURU**  
waterproofing products

CE CSTB  
LPC FILE 9999 - LPC FILE 9999

WATER-STOP  
A LAYER SUPERIOR TECHNOLOGY

WATER-STOP  
A LAYER SUPERIOR TECHNOLOGY

**GURU**  
waterproofing products

WATER-STOP  
A LAYER SUPERIOR TECHNOLOGY

**GURU**  
waterproofing products

CE CSTB  
LPC FILE 9999 - LPC FILE 9999

WATER-STOP  
A LAYER SUPERIOR TECHNOLOGY

**GURU**  
waterproofing products

WATER-STOP  
A LAYER SUPERIOR TECHNOLOGY

**GURU**  
waterproofing products

CE CSTB  
LPC FILE 9999 - LPC FILE 9999

WATER-STOP  
A LAYER SUPERIOR TECHNOLOGY

CE CSTB  
LPC FILE 9999 - LPC FILE 9999

**GURU**  
waterproofing products

WATER-STOP  
A LAYER SUPERIOR TECHNOLOGY

WATER-STOP  
A LAYER SUPERIOR TECHNOLOGY

WATER-STOP  
A LAYER SUPERIOR TECHNOLOGY

**GURU**  
waterproofing products

**GURU**  
waterproofing products

CE CSTB

---

# CONTENT

- 06 **COMPANY**  
Estil Guru
- 08 **DAP CERTIFICATION**  
More than a certification, an environmental commitment..
- 10 **TECHNICAL MEMBRANES**  
Waterproofing, uncoupling, impact, and breathable membranes.
- 44 **ACCESSORIES FOR MEMBRANE INSTALLATION**  
Cement, sealing putty, tools, and special parts for critical points.
- 46 **OUTDOOR DRAINAGE SYSTEMS**  
Drainage systems for terraces, roofs, and roof terraces
- 54 **SHOWER SYSTEMS WITH BUILT-IN WATERPROOFING**  
Choose from our extensive catalogue.
- 100 **INSTALLATION AND FINISHING ACCESSORIES FOR SHOWER SYSTEMS**  
Installation accessories and replacements. Customize your shower with our finishes.
- 116 **MODULAR SYSTEMS**  
Dry construction panels and modular building products.
- 132 **GURU CUSTOMISED**  
Discover how GURU products can form part of your hotel experience
- 134 **GURU SANITARY**  
Our latest innovations for hospitals and nursing homes..

# ILLUSTRATED TABLE OF CONTENTS

## TECHNICAL MEMBRANES



**WATER-STOP**  
Pages 12-27



**G-FLEX**  
Pages 28-35



**G-SOUND | G-SOUND PREMIUM**  
Pages 36-39



**THERMO SEAL**  
Pages 40-41



**W-S AIR**  
Pages 42-43

## ACCESSORIES FOR MEMBRANE INSTALLATION



**W-S TUB**  
Page 44



**W-S DEX**  
Page 44



**W-S DIN**  
Page 44



**W-S BAND 14 / 34**  
Page 44



**SAFETUB**  
Page 44



**W-S PASSTUB**  
Page 44



**G-TROWEL**  
Page 45



**W-SPATULA**  
Page 45



**EASEAL**  
Page 45



**W-S BUTIL**  
Page 45




**W-S MASTIC**  
Page 45

## OUTDOOR DRAINAGE SYSTEMS



**RAYNEX PREMIUM**  
Pages 46-49



**RAYNEX PVC**  
Pages 50-51



**W-S KIT TERRAZA**  
Page 52




**W-S KIT TERRAZA PLUS**  
Page 53


## SHOWER SYSTEMS WITH BUILT-IN WATERPROOFING




**SUMIDEROS  
TRYPHON vs RUBER**  
Pages 56-61



**REVOLUX TRYPHON KIT**  
Pages 62-67



**REVOLUX RUBER KIT**  
Pages 68-69



**EVOLUX TRYPHON KIT**  
Pages 70-79




**EVOLUX INTEGRA TRYPHON  
KIT**  
Pages 80-81



**EVOLUX RUBER KIT LINEAL**  
Pages 82-89



**EVOLUX VINYL**  
Pages 90-91



**EVOLUX RUBER KIT  
PUNTUAL**  
Pages 92-93



**EVO RUBER KIT**  
Pages 94-97



**W-S BATHKIT**  
Pages 98-99

## INSTALLATION ACCESSORIES FOR SHOWER SYSTEM



**SAFE BAND**  
Pages 100-103



**SHELF**  
Pages 104-107



**ACCESSORIES AND SPARE  
PARTS**  
Pages 108-115



**G-PRO WALL / G-PRO LEVEL**  
Page 109

## MODULAR SYSTEMS



**W-S BOARD**  
Pages 116-119



**W-S BASINK**  
Pages 120-121



**W-S SINK**  
Pages 122-123



**W-S NICHE**  
Pages 124-125



**W-S NICHE RECORTABLE**  
Pages 126-127



**SUPERKIT**  
Pages 128-131


# CONTINUOUS EVOLUTION TOWARDS EXCELLENCE

ESTIL GURU S.L.U. is a well-established family company in the **construction sector** with a proven track record in the market and strong business stability. The company has grown through the manufacturing and marketing of **waterproofing products**.

Guru's goal is to integrate **innovative products**, supported by thorough research, into new proposals for construction solutions. This approach drives us to create dependable, **high-quality** products that meet or customers' expectations while providing the necessary personal and technical support.

**With a presence in five continents**, Estil Guru boasts an exceptional team and extensive experience in manufacturing waterproofing membranes, Italian-style shower systems for on-site showers, and various accessories for professional ceramic tile installers. Our products meet the highest quality **standards** set by the European Union and are certified by external laboratories such as IAPMO, CSTB and KIWA.



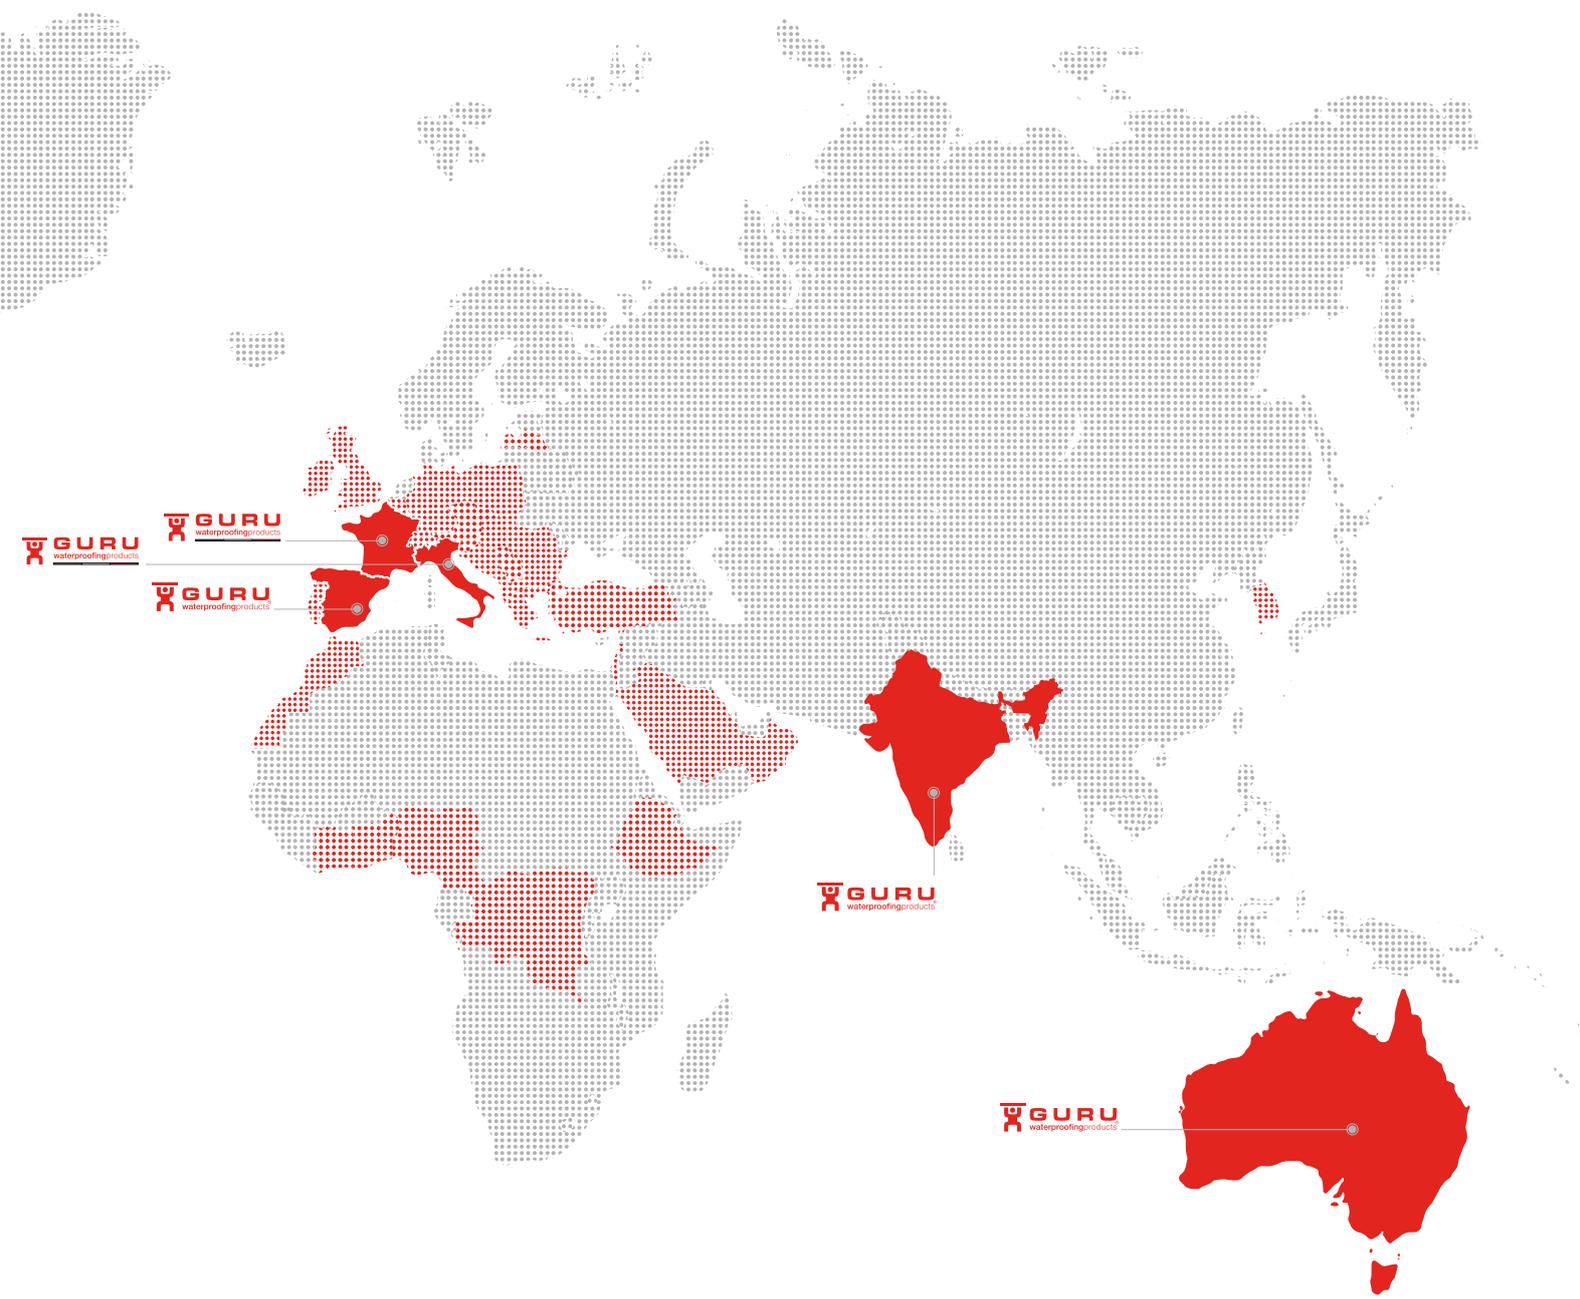

**+3200**  
POINTS OF SALE

# LESS PLASTIC, MORE PROTECTION

## Estil Guru passes the EDP with flying colours!

At Estil Guru, we are proud to announce that we have obtained the EPD through an objective assessment that demonstrates the environmental impact of our Water-Stop product throughout its life cycle.

**The Environmental Product Declaration** is a rigorous analysis that evaluates the environmental impact of a product throughout its life cycle. At Estil Guru, we not only strive for excellence in performance but also aim to achieve it with transparency.


By obtaining and sharing the EPD, we demonstrate our commitment to the accurate assessment of our products' environmental impact.

More than a certification, **an environmental commitment.**





WATER-STOP: unrivalled performance, **guaranteed sustainability.**

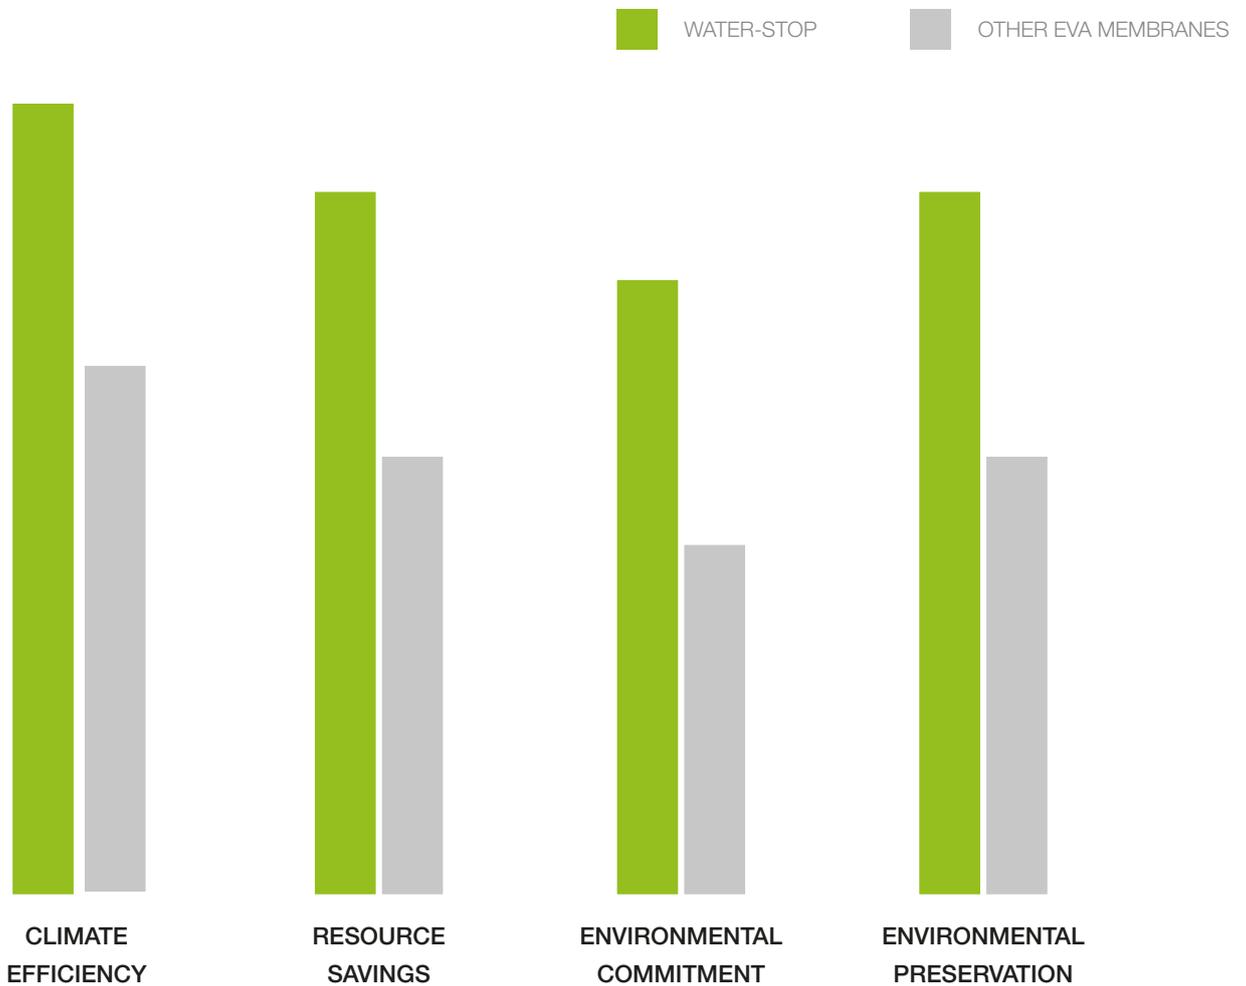

By choosing Water-Stop, you not only ensure a superior waterproofing solution for your most valued spaces, but also actively contribute to environmental preservation. WATER-STOP is the most sustainable waterproofing solution, now verified by an **EPD**.

Join us on the journey towards sustainability, where performance excellence meets **environmental responsibility.**

# AT THE FOREFRONT OF WATERPROOFING



More flexible



More resistant



Longer duration



Easier to install




Greater time savings

At Estil Guru, innovation is at the core of our mission. We are proud to have pioneered the design of waterproof EVAC-type membranes using the combined extrusion method.

Our waterproofing membranes are designed to cover all areas of home waterproofing, including exteriors, interiors, and swimming pools.

Each of our geotextile waterproof membranes is designed, engineered, and manufactured to achieve unique specifications.

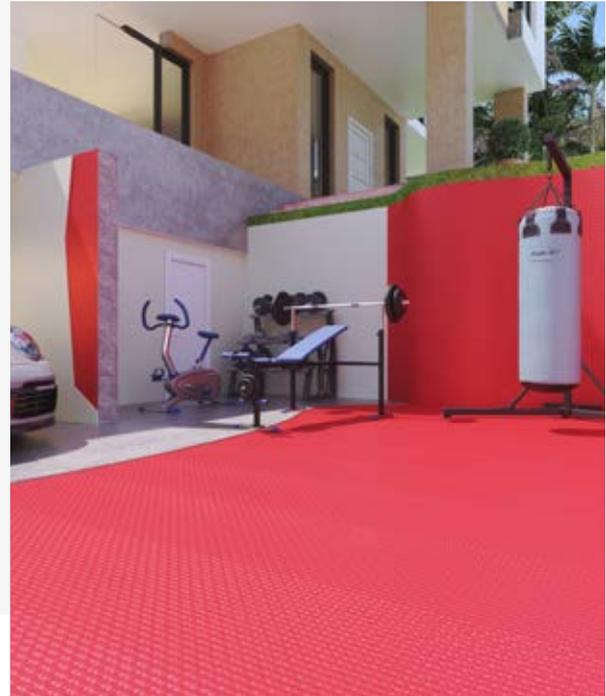

Learn more about our waterproof membranes



WATERPROOF MEMBRANE **WATER-STOP**



WATER-STOP is a **thin** and **elastic** geotextile membrane that is **ideal for waterproofing** floors and walls under the lining.


It is composed of **several layers**: at its core, a waterproof membrane made of two layers of plastic film (EVAC), surrounded on each side by a non-woven fleece of polyester and polypropylene fibers.

**A MEMBRANE CAPABLE OF ANYTHING**


INDOOR



OUTDOOR

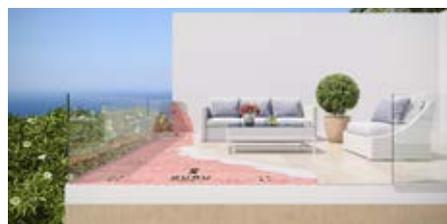

SWIMMING POOLS

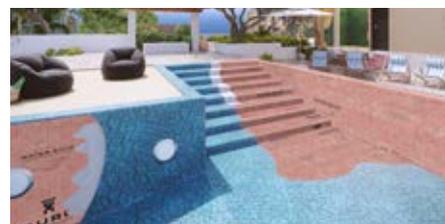



bimobject



Scan the QR code and discover more




¡New cliché!

Cutting Precision: 1 x 1 cm



e = 0,55 mm



### Features

- » High mechanical grip
- » Bridges cracks and allows small movements.
- » Minimum installation height
- » Lightweight and safe
- » More flexible than most waterproof membranes
- » Easy installation
- » Excellent for both new builds and renovations
- » Economical and reliable solution

### Technical Data

- » Weight/m<sup>2</sup> (gr): 250
- » Width (m): 1, 1'5, 2, 3
- » Length (m): 5, 10, 20, 30, 40
- » Pull out:  
≥ 0,7 N/mm<sup>2</sup> = ≥ 70 tons/m<sup>2</sup>



**CSTB**

AVIS TECHNIQUE CSTB – NORMATIVE  
REF.: EN 13956:2013

## 4 Layers Superior Technology




Non-woven fibres:  
- 50% polyester  
- 50% polypropylene.

Double layer of  
waterproof EVAC.



# SIZE MATTERS

At GURU, we believe that size is important, especially when it comes to our new 3-metres width WATER-STOP film roll. Thanks to this new size, you can achieve **perfect adaptability** for both small and large projects. Furthermore, this new format offers flexibility and **optimises installation time, cost, and material** by reducing the number of joints required for installation.

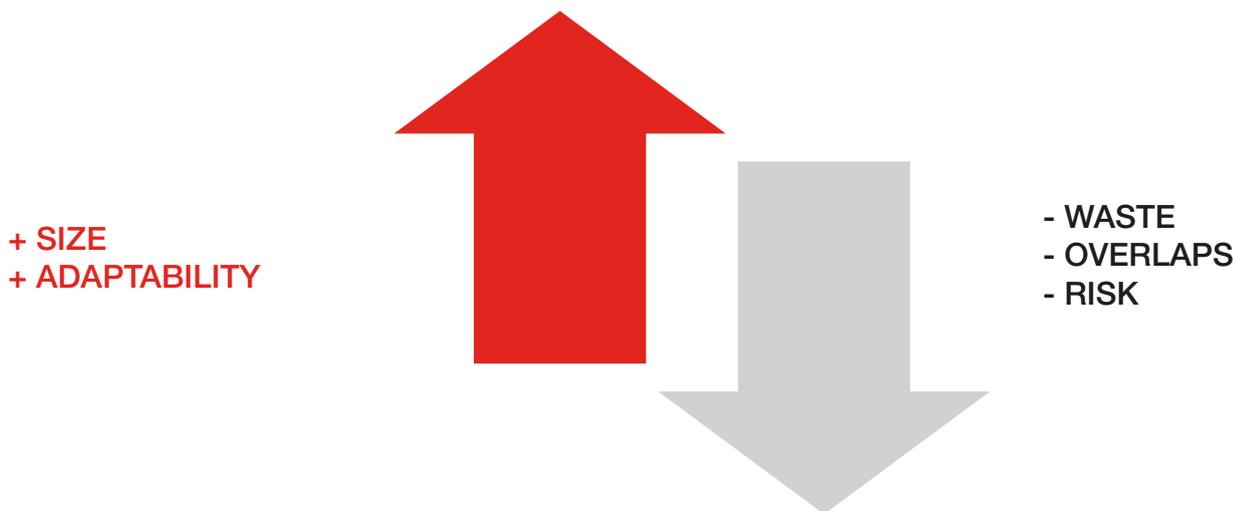

## AVAILABLE SIZES

Available in a **variety** of roll sizes to suit your needs, discover limitless versatility with our range of WATER-STOP waterproofing membranes. Our wide range of options gives you the flexibility to achieve accurate and efficient application from small projects to large areas. Designed to offer bespoke solutions, the unparalleled adaptability of our rolls will simplify your sealing experience.

PRODUCT			LOGISTICS		
REF.	DESCRIPTION	MEASURE	WEIGHT/ROLL 	PCS/BOX 	PCS/PALLET 
IF55039	WATER-STOP BAG	1,5 x 2 m   3 m <sup>2</sup>	1 kg	-	-
IF51000	WATER-STOP ROLL	1 x 5 m   5 m <sup>2</sup>	1,6 kg	12	200
IF51013	WATER-STOP ROLL	1 x 10 m   10 m <sup>2</sup>	3,2 kg	10	200
IF52000	WATER-STOP ROLL	1 x 30 m   30 m <sup>2</sup>	8,7 kg	4	100
IF54000	WATER-STOP ROLL	1,5 x 20 m   30 m <sup>2</sup>	8,7 kg	5	100
IF53000	WATER-STOP ROLL	2 x 20 m   40 m <sup>2</sup>	11,7 kg	4	100
<b>NEW</b> IF63000	WATER-STOP ROLL	3 x 20 m   60 m <sup>2</sup>	15,6 kg	4	100
IF53040	WATER-STOP ROLL	2 x 40 m   80 m <sup>2</sup>	23,4 kg	2	100

# UP TO 3 METERS WIDTH!



1 x 5 meters



1 x 10 meters



1 x 30 meters



1,5 x 20 meters



2 x 20 meters



2 x 40 meters



3 x 20 meters

## RENOVATIONS ARE NO LONGER A PROBLEM!

WATER-STOP is a minimum 1mm thick waterproofing membrane without additional layers. Ideal for the renovation of terraces and balconies where other types of waterproofing have deteriorated. Solves problems such as leaks and stains caused by damp conditions. Its advantage is that it does not exceed the height of the access to the houses and **can be installed directly on the existing pavement**. It simplifies the renovation process, maximises efficiency and ensures a flawless finish.




## HIGH MECHANICAL GRIP

Thanks to its high mechanical grip, the sheet is bonded to the substrate and the coating is bonded directly to the sheet, making the assembly **cohesive and strong**, eliminating the need for a compression layer in flooring applications and eliminating the problems associated with **wall applications**.



### BRIDGES CRACKS AND ALLOWS SMALL MOVEMENTS

Although WATER-STOP forms a system with the substrate and coating, the elasticity of the inner waterproof membrane combined with the elasticity of the fibres provides a decoupled effect, allowing each element to expand and contract independently.

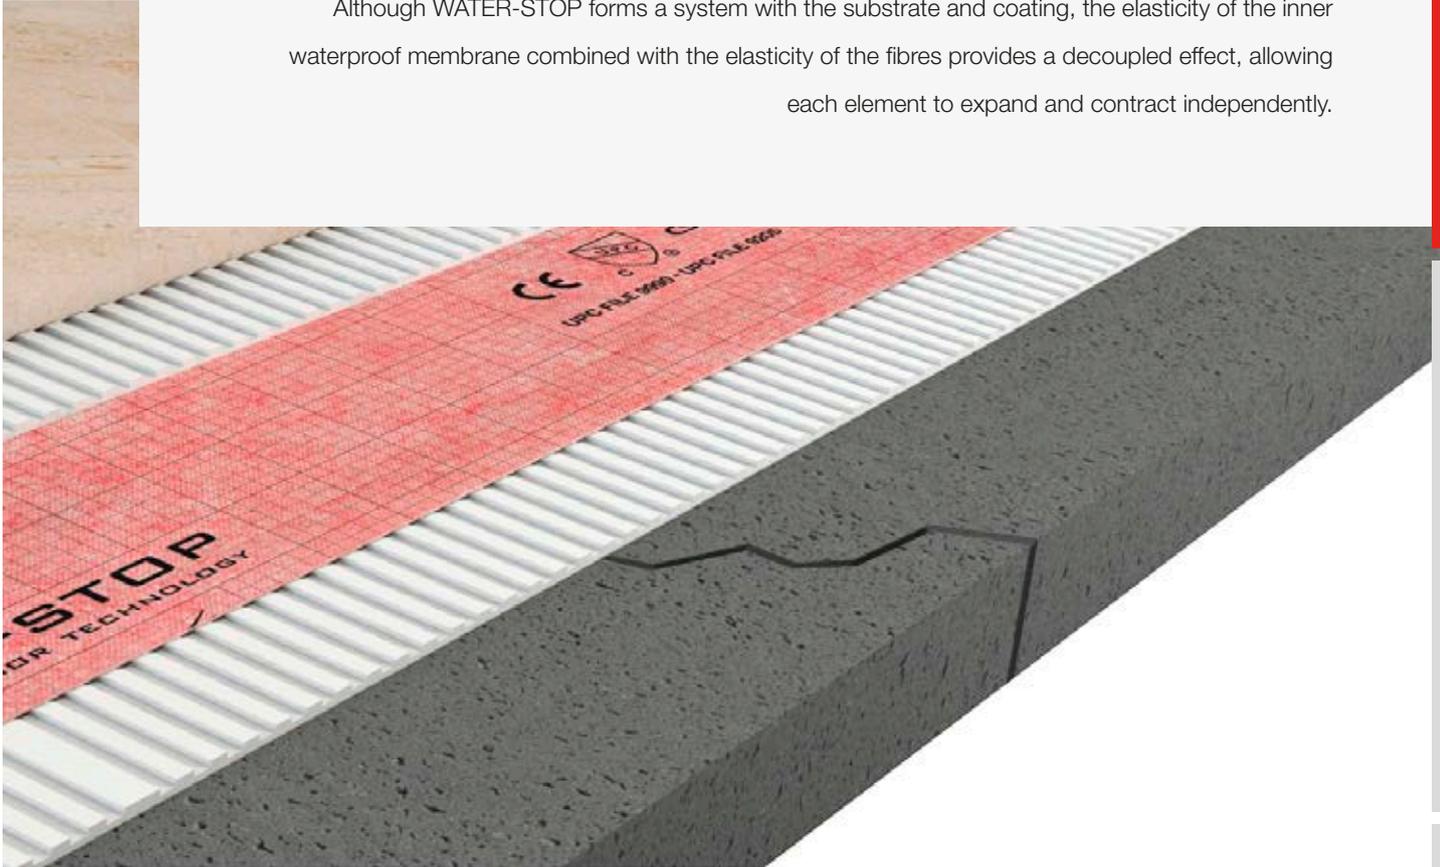

### MUCH MORE FLEXIBLE THAN ANY OTHER WATERPROOFING MEMBRANES

With WATER-STOP, it is easier to solve the most **complicated points** of any installation, such as corners, floor-to-wall joints, joints with building elements...




# WHY CHOOSE WATER-STOP?

## ANALYSIS OF GENERAL WATERPROOFING METHODS:

**WATER-STOP:** A multilayer membrane composed of 4 layers: 2 inner layers of EVAC plastic film and 2 outer layers of fiber for mechanical anchoring with C2 adhesive cement.

**ASPHALT:** bituminous membranes that are manufactured by impregnating paper or fibreglass matting with pitch or bitumen and added with plasticisers.


**LIQUID APPLIED WATERPROOFING:** Products made of polymers in solution. They can be rubber-based, polyurethane, polyurea, or waterproof cement.

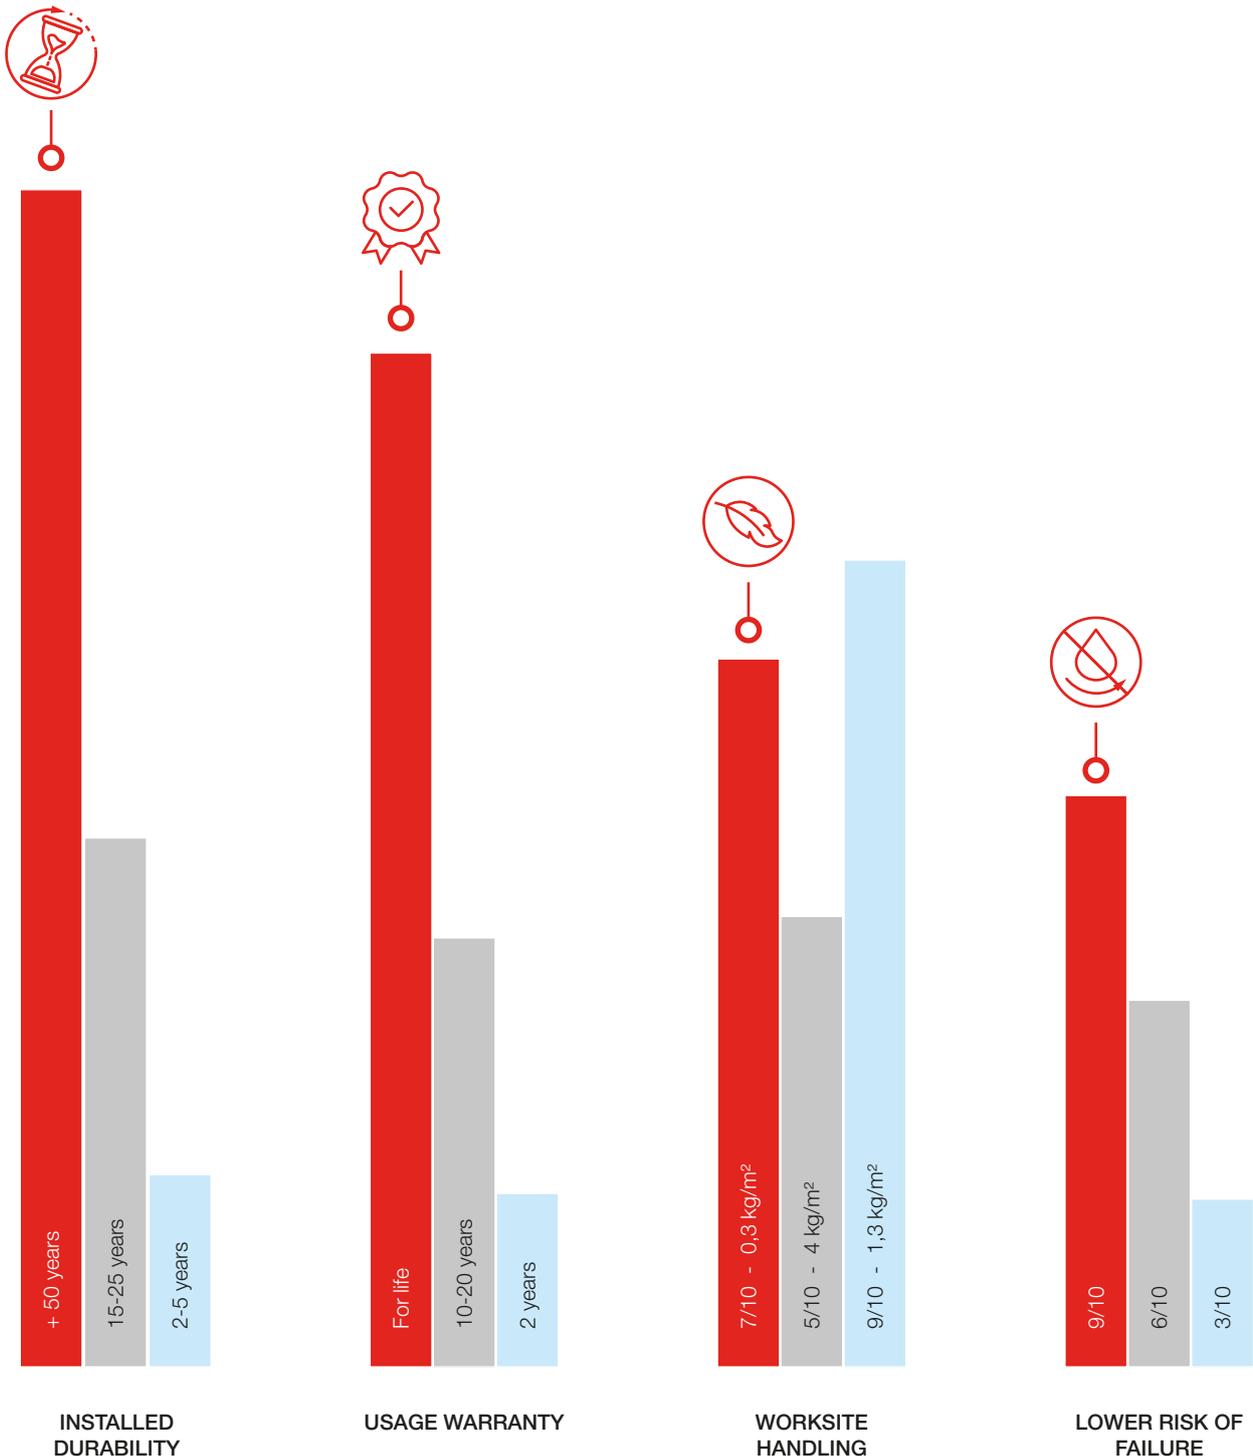

■ WATER-STOP    
 ■ ASPHALT    
 ■ LIQUID APPLIED WATERPROOFING

**INSTALLATION FEATURES**

**1. HEIGHT**

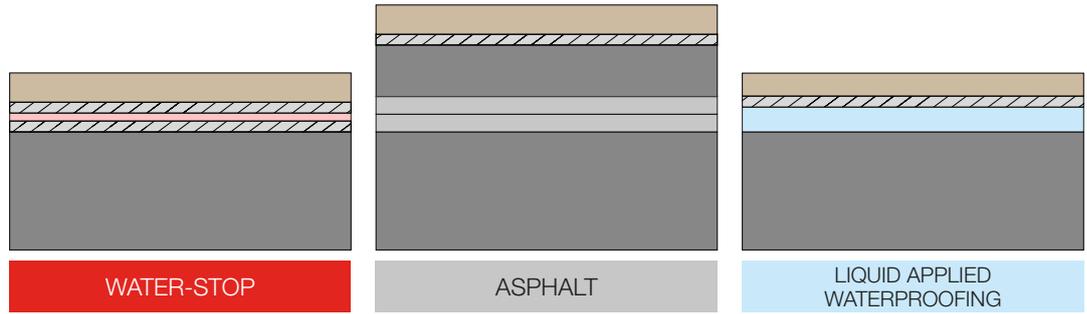


TOTAL HEIGHT	<b>2 cm</b>	7 cm	2 cm
WEIGHT	<b>25-30 kg/m<sup>2</sup></b>	120-180 kg/m <sup>2</sup>	30-35 kg/m <sup>2</sup>
TIME	<b>20 min/m<sup>2</sup></b>	50 min/m <sup>2</sup>	35 min/m <sup>2</sup>
INSTALLATION TIME	<b>Same day</b>	3-5 days	2-3 days

**2. REQUIRED RESOURCES**




**3. SUSTAINABILITY**

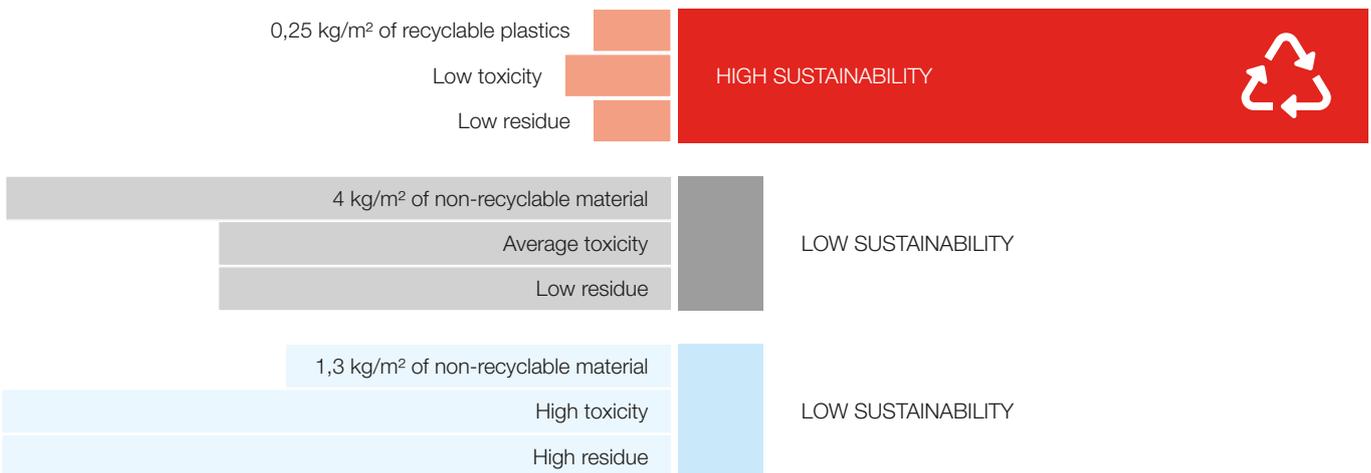


# WHY CHOOSE WATER-STOP?

ANALYSIS OF GENERAL WATERPROOFING METHODS (SOURCE: **CYPE**): 


## 1. PRODUCT PRICE / M<sup>2</sup>

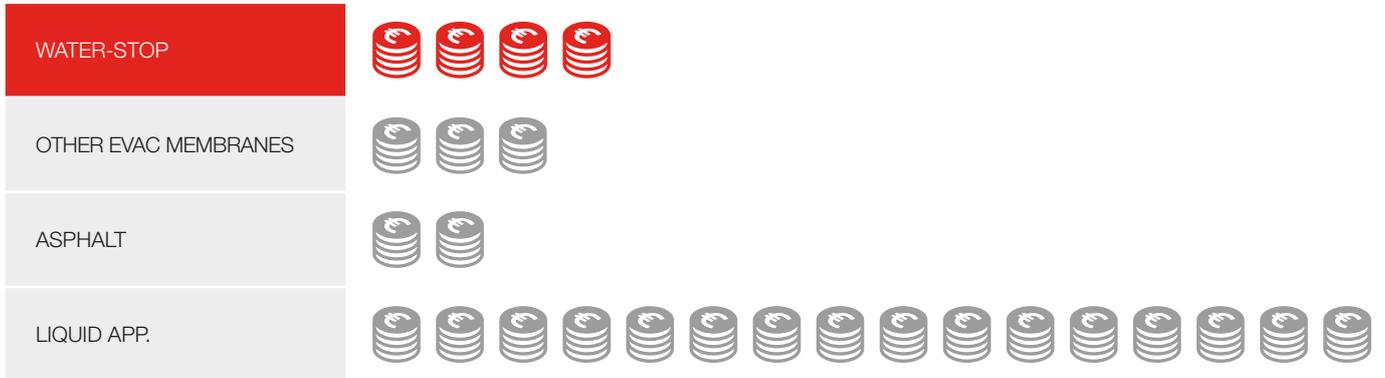

## 2. LABOUR: AVERAGE TIME / OPERATOR COST VALUE / M<sup>2</sup>

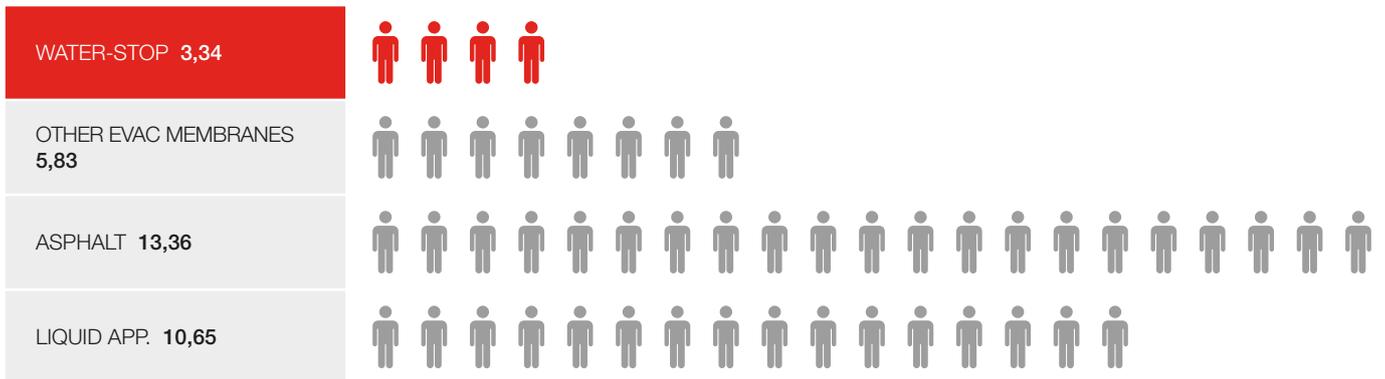

## 3. INSTALLATION TIME: AVERAGE INSTALLATION TIME / M<sup>2</sup>

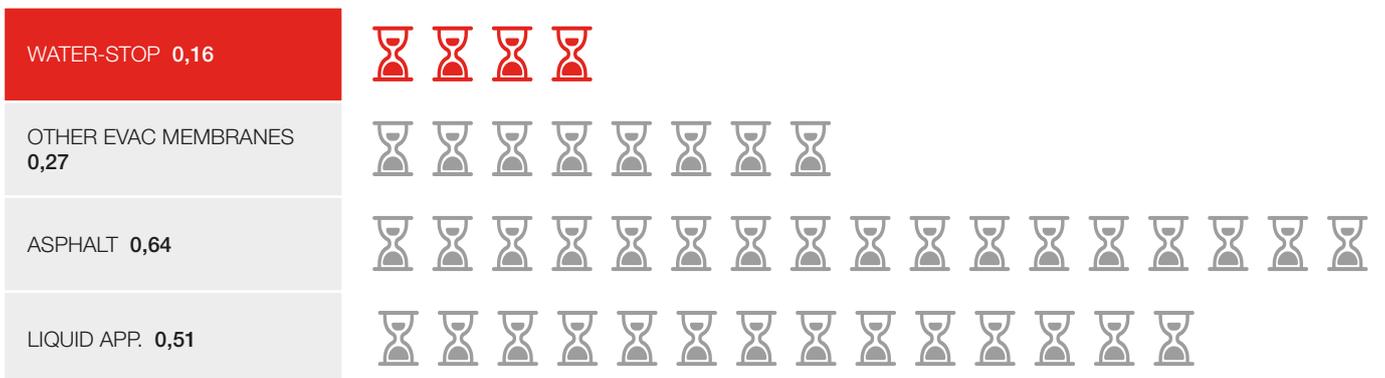

# COSTS, ARE ALWAYS LOWER WITH **GURU**

4. GENERAL COST: PRODUCT PRICE + LABOUR + INSTALLATION TIME + MATERIALS USED



WATER-STOP MEMBRANE



OTHER EVAC MEMBRANES



ASPHALT




LIQUID APP.

## EXAMPLE OF INDOOR INSTALLATION

Integrated showers, adapted toilets, gallery, sills, washrooms, changing rooms, kitchen, laundry... And public spaces like hospitals, hotels, care homes, schools, sports centres, fitness centres, spas...



REF.	DESCRIPTION	PERFORMANCE	PAGE	FORMAT
IF52000	WATER-STOP ROLL 1 x 30 m   30 m <sup>2</sup>	-	14	ROLL
IGU6005	W-S DEX	-	44	BAG 2 PCS.
IGU6006	W-S DIN	-	44	BAG 2 PCS.
IG60004	W-S TUB	-	44	BAG 2 PCS.
IG64000	W-S MASTIC	6 meters	45	CAN 290 ml
IG61000	W-S BAND 14	-	44	ROLL 14 cm x 20 m
IGU6007	MIXING VALVE SEAL	-	-	BOLSA 1 PC.
IG60020	SAFETUB Ø32-50	-	-	BOLSA 5 PCS.



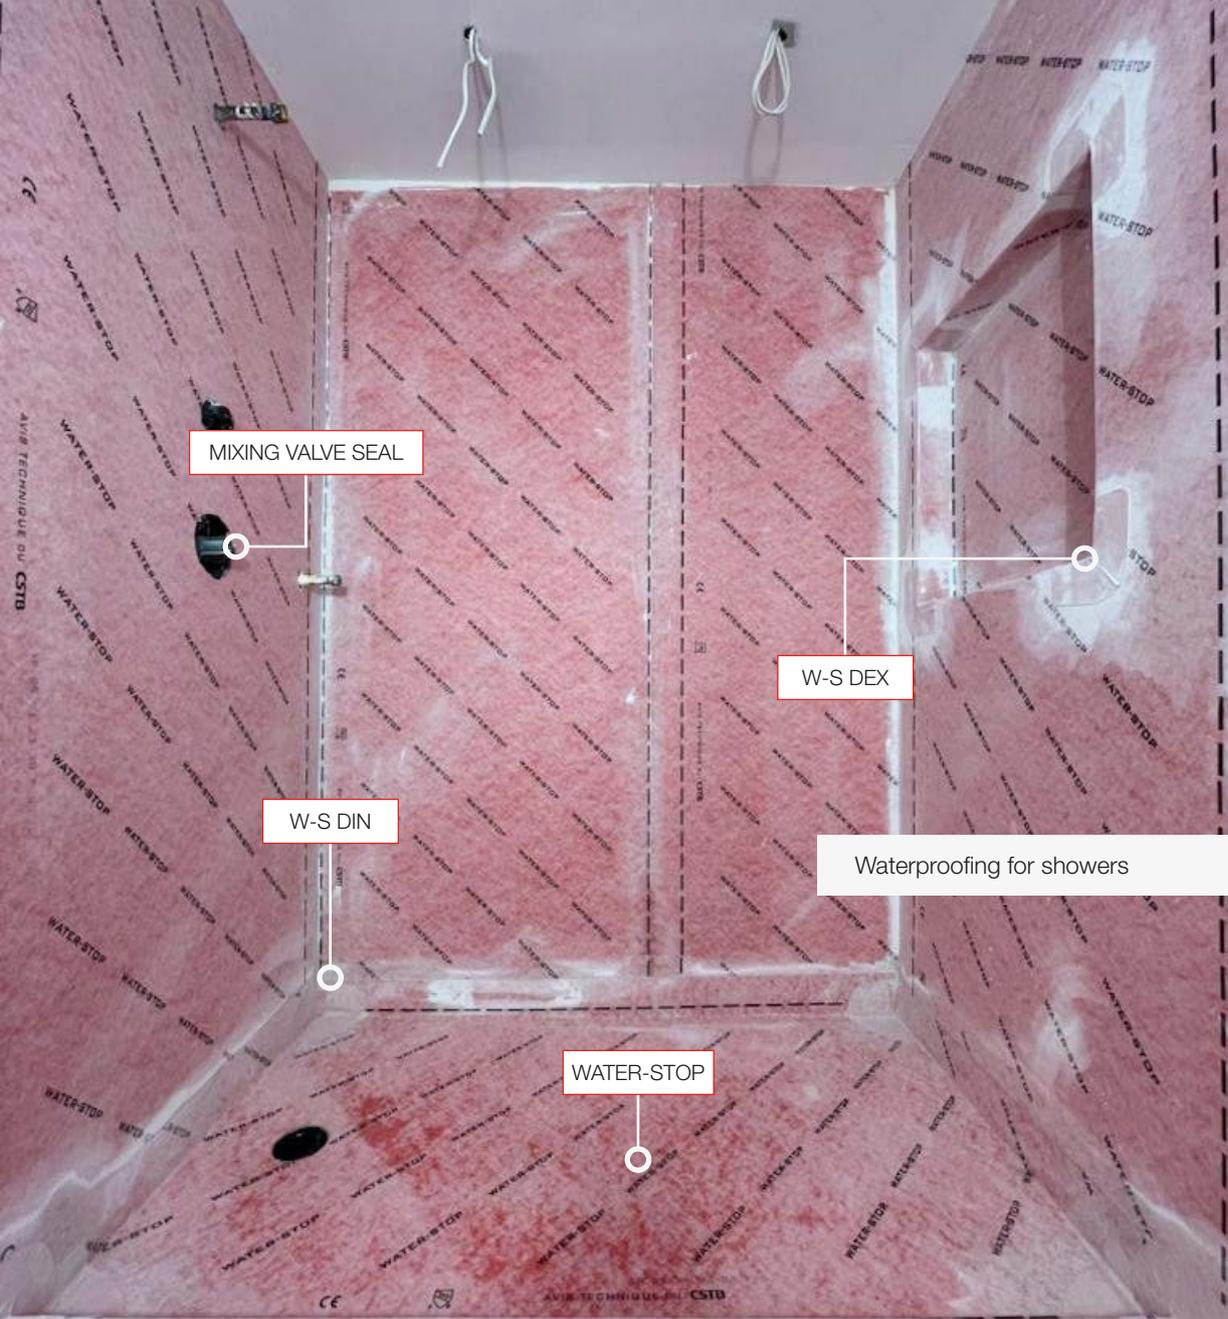

Explore  
our range of  
**complete shower kits.**

Página 56

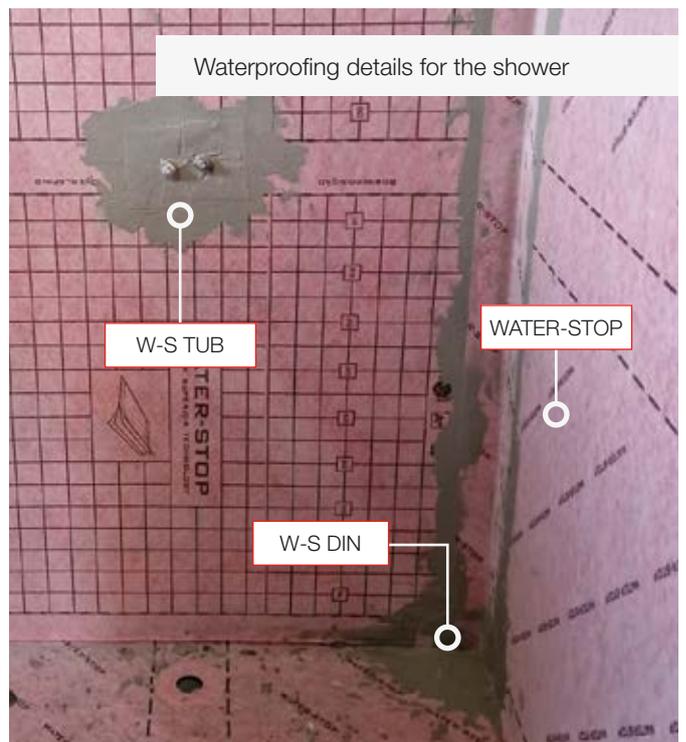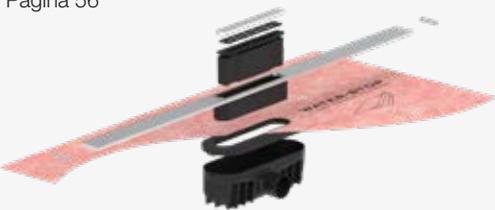



## EXAMPLE OF OUTDOOR INSTALLATION



WATER-STOP is a waterproof membrane suitable for both transitable and non-transitable terraces, making it 100% effective for outdoor use. WATER-STOP is also ideal for waterproofing roofs, both transitable and non-transitable, balconies, cisterns and tanks.

REF.	DESCRIPTION	PERFORMANCE	PAGE	FORMAT
IF53000	WATER-STOP ROLL 2 x 20 m · 40 m <sup>2</sup>	-	14	ROLL
IGU6005	W-S DEX	-	44	BAG 2 PCS.
IGU6006	W-S DIN	-	44	BAG 2 PCS.
IG56024	W-S PASSTUB 110 mm (Gargoyle) * <sup>1</sup>	-	44	1 UD.
IG61000	W-S BAND 14 cm x 20 m	-	44	ROLL
IG60023	EASEAL 20 kg	100 m.l. * <sup>2</sup>	45	BAG
IG64000	W-S MASTIC 290 ml	6 m.l.	45	CAN
IG63000	W-S BUTIL 5 cm x 10 m	10 m.l.	45	ROLL

\*<sup>1</sup> Refer to page 44 for additional measurements.

\*<sup>2</sup> For this installation method, a 5 cm overlap is required for performance. See page 45 for further details.



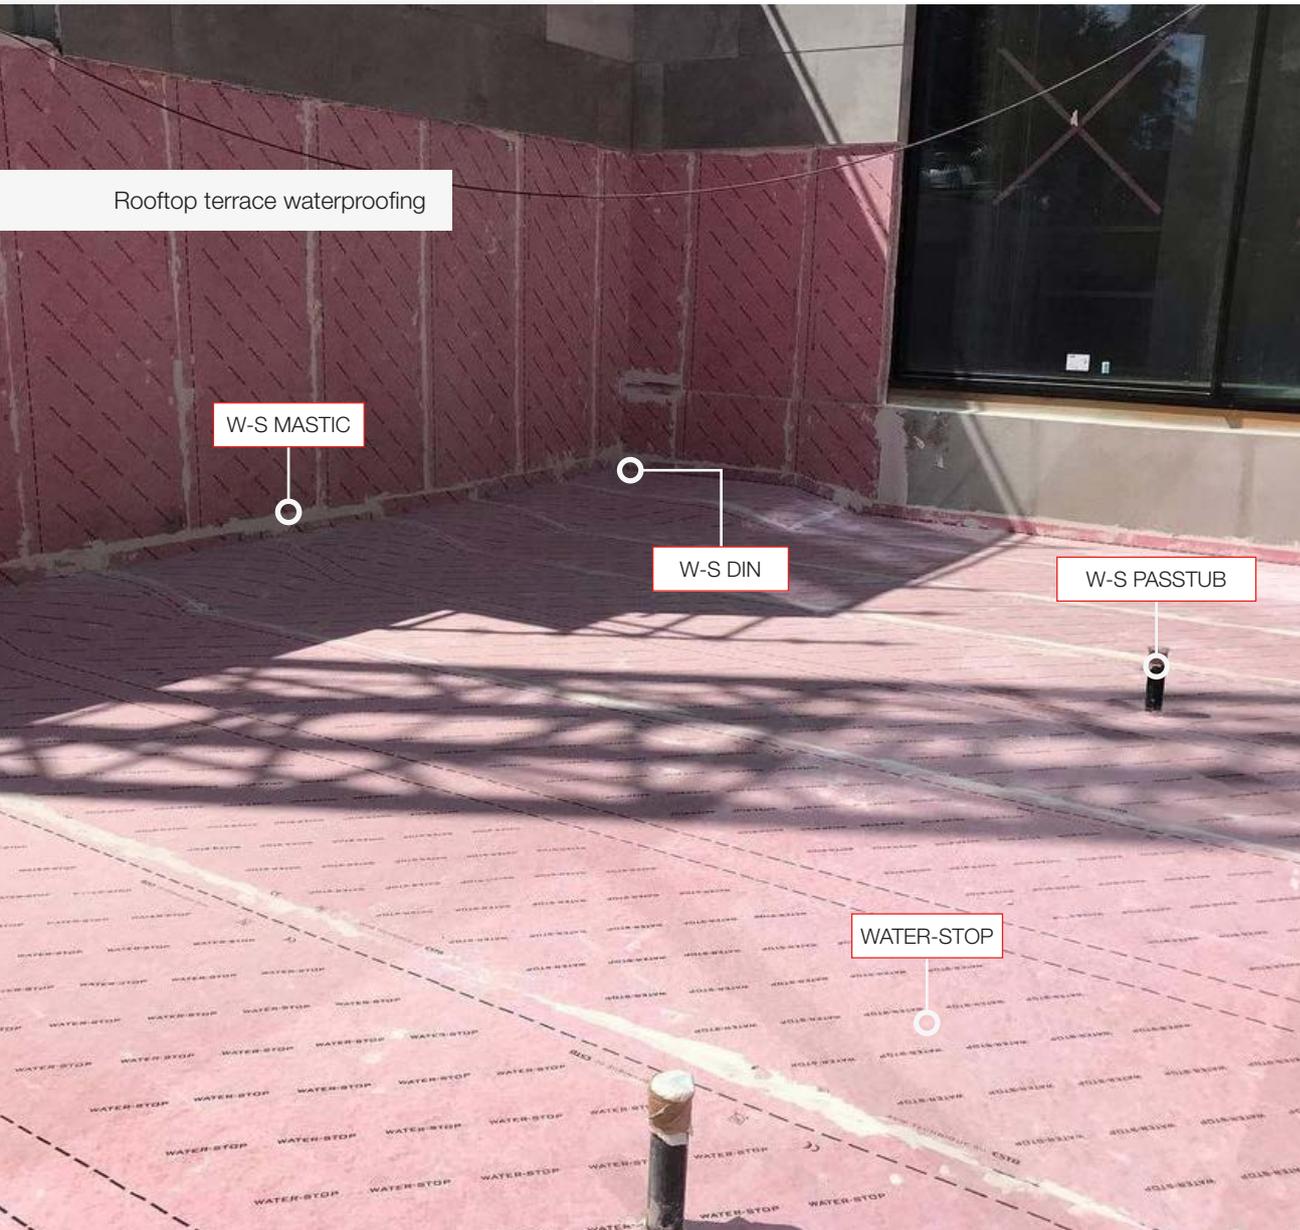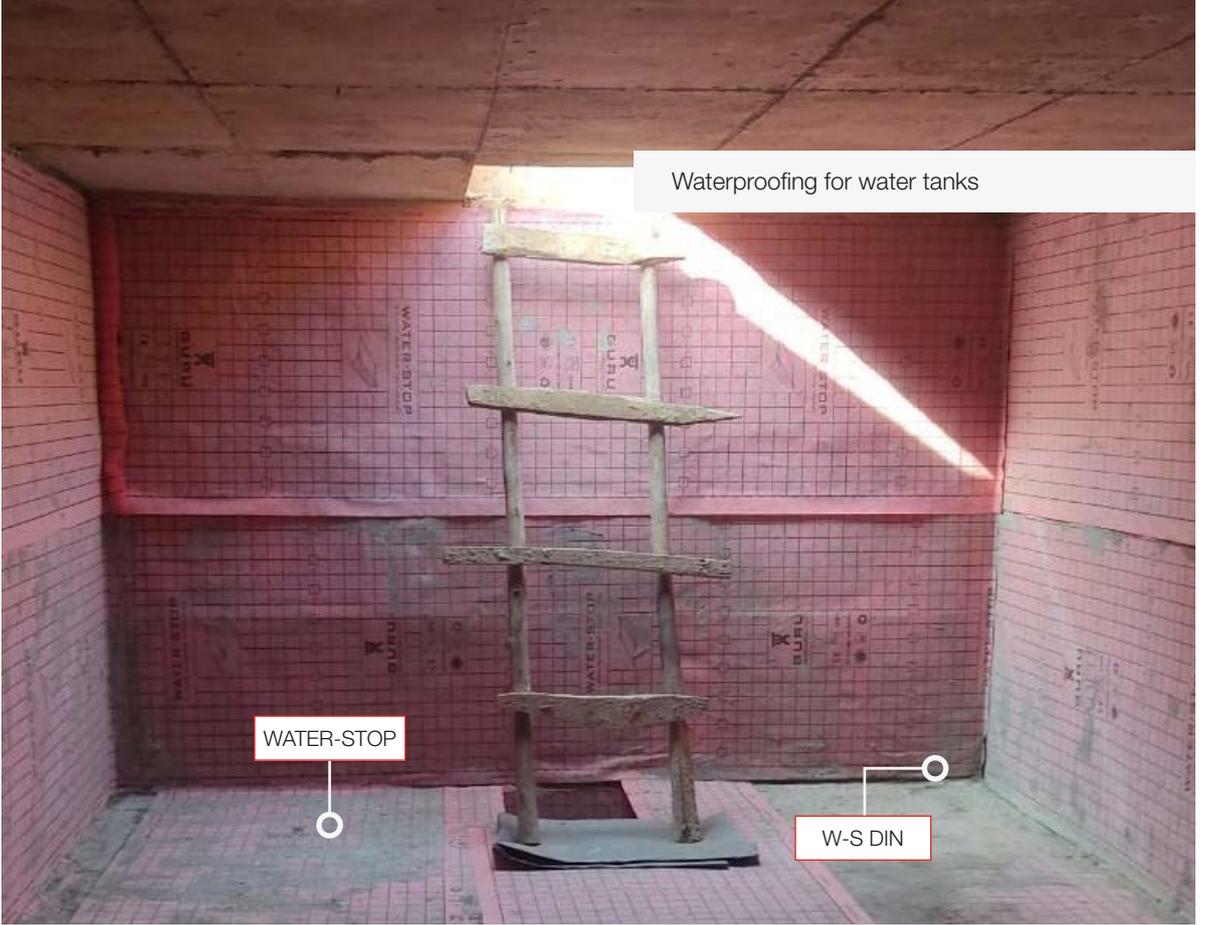

# EXAMPLE OF INSTALLATION IN A SWIMMING POOL

Our waterproof membrane is perfect for swimming pools. Its multi-layer composition guarantees the pool's integrity against leaks. It is worth noting that the WATER-STOP membrane can be used to bridge small cracks caused by time, wear and tear, or roots.

REF.	DESCRIPTION	PERFORMANCE	PAGE	FORMAT
IF53000	WATER-STOP ROLL 2 x 20 m · 40 m <sup>2</sup>	-	14	ROLL
IG60021	SAFETUB Ø63-75 mm	-	44	BAG 5 UDS.
IG61000	W-S BAND 14	-	44	ROLL 14 cm x 20 m
IG60023	EASEAL 20 kg	120 m.l. *	45	BAG
IG63000	W-S BUTIL 5 cm x 10 m	10 m.l.	45	ROLL
IGU6005	W-S DEX	-	44	BAG 2 UDS.
IGU6006	W-S DIN	-	44	BAG 2 UDS.
IG64000	W-S MASTIC 290 ml	6 m.l.	45	CAN

\* Performance for this installation method overlaps with W-S BAND. See page 45 for additional information.



WATER-STOP



SAFETUB



W-S BAND



EASEAL



W-S BUTIL



W-S DEX





W-S DIN




W-S MASTIC



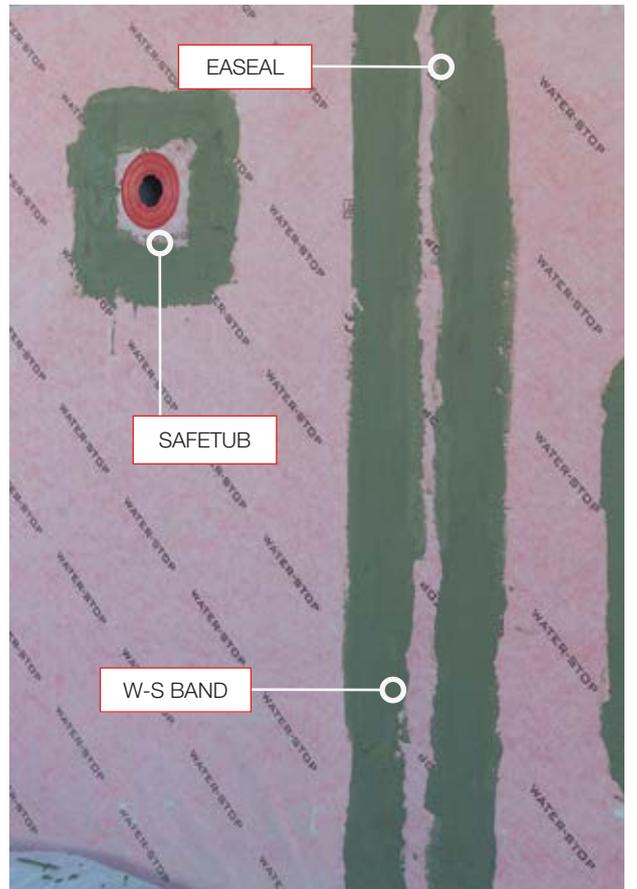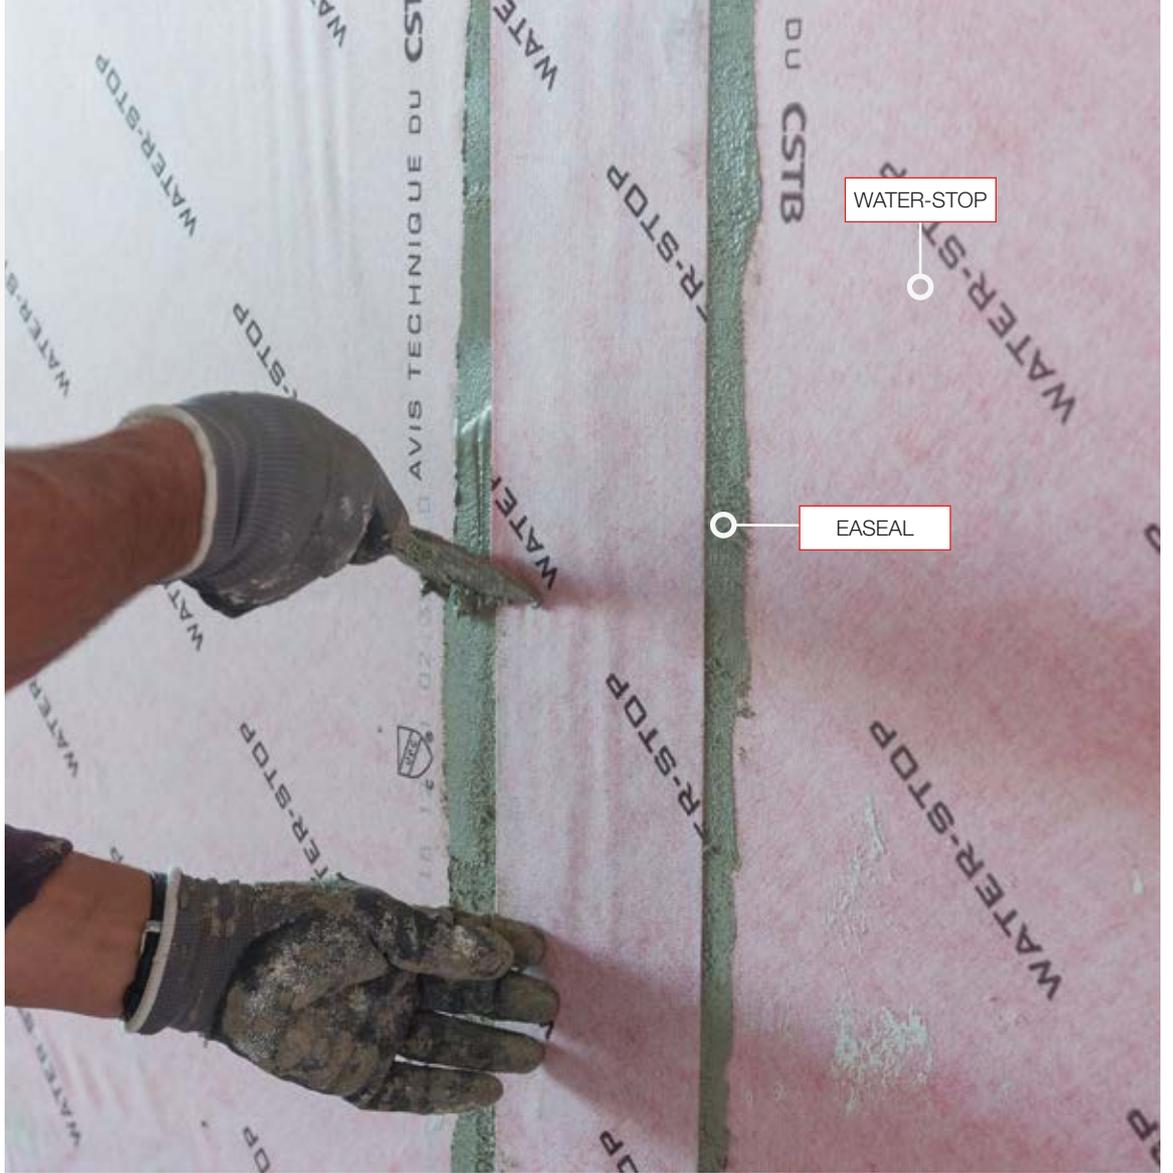

**UNCOUPLING MEMBRANE G-FLEX**

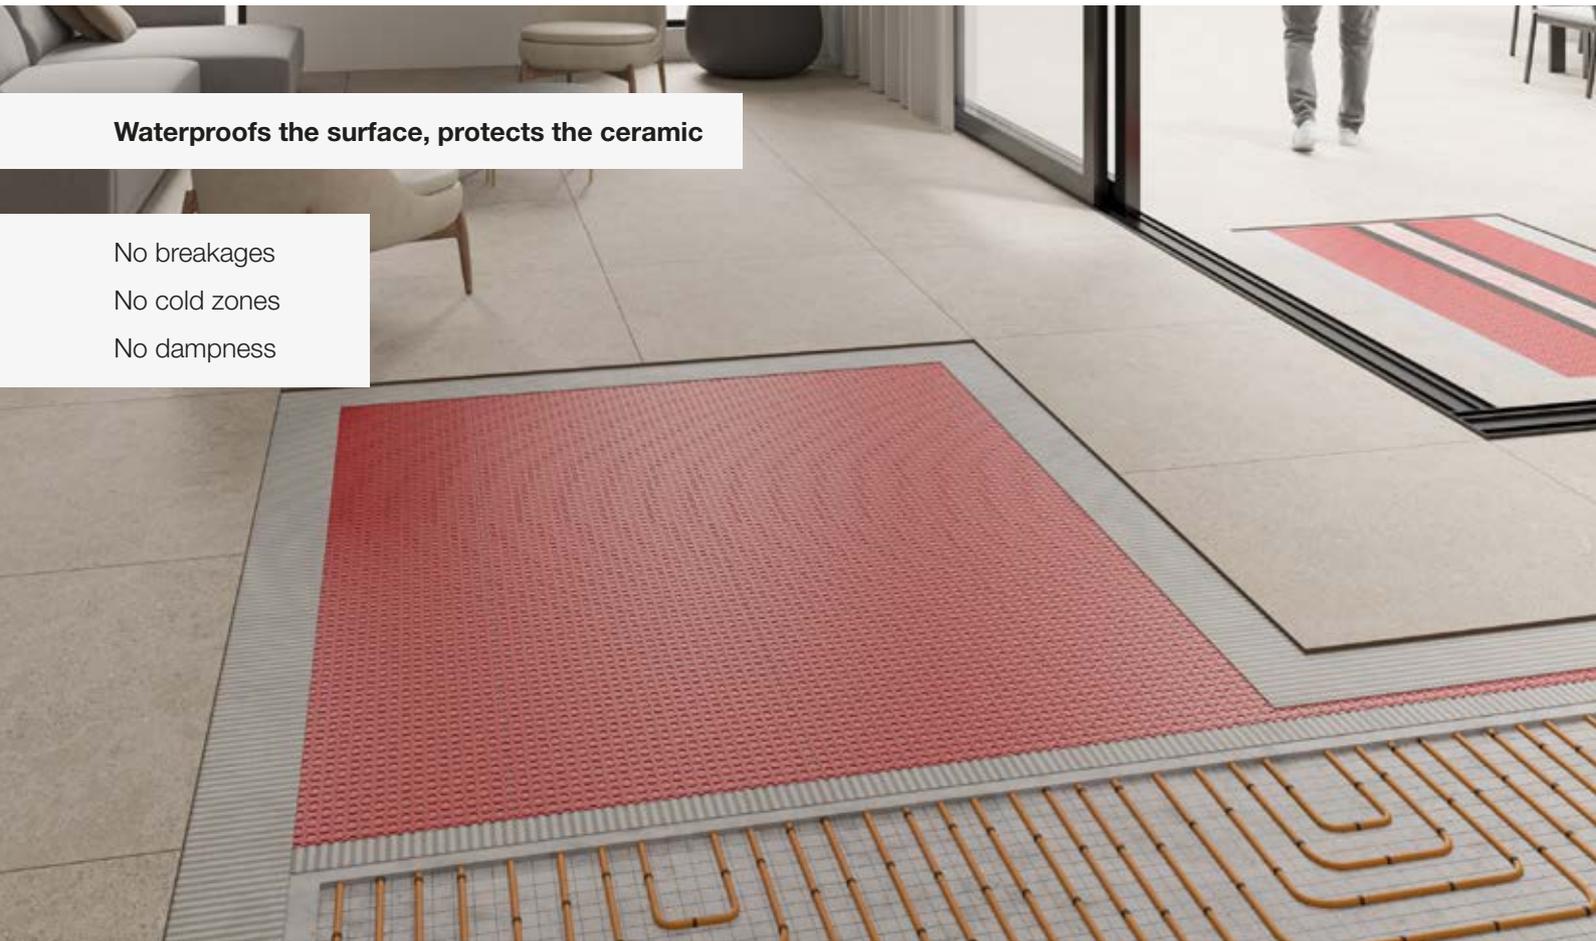


**Waterproofs the surface, protects the ceramic**

- No breakages
- No cold zones
- No dampness

G-FLEX is a **waterproof and anti-fracture uncoupling membrane**. G-FLEX membrane waterproofs and protects any surface, old or new, wet or dry, cracked or subject to dimensional movement.

Furthermore, it **reduces on-site installation time** as the cladding can be installed and laid **without any waiting period**. This means that **the installation can be walked on immediately**. It also plays a crucial role in **underfloor heating** installations due to its ducts that distribute heat evenly across the entire surface.

Due to G-FLEX's effectiveness in moisture release from the slab in new constructions, there is a significant reduction in waiting time for ceramic installation, completing it in less than 28 days, resulting in a savings of up to two weeks in the construction process. This same moisture **dissipation capability** makes it ideal for renovations in areas prone to rain, even on previously damp surfaces.

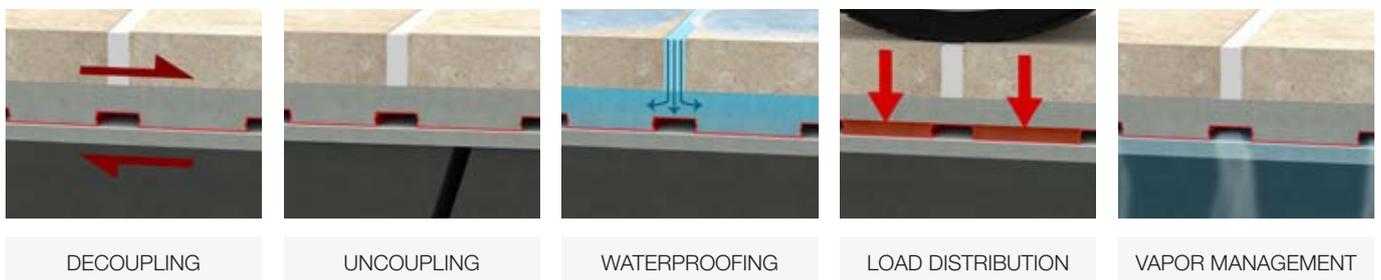




bimobject



Scan the QR code and discover more

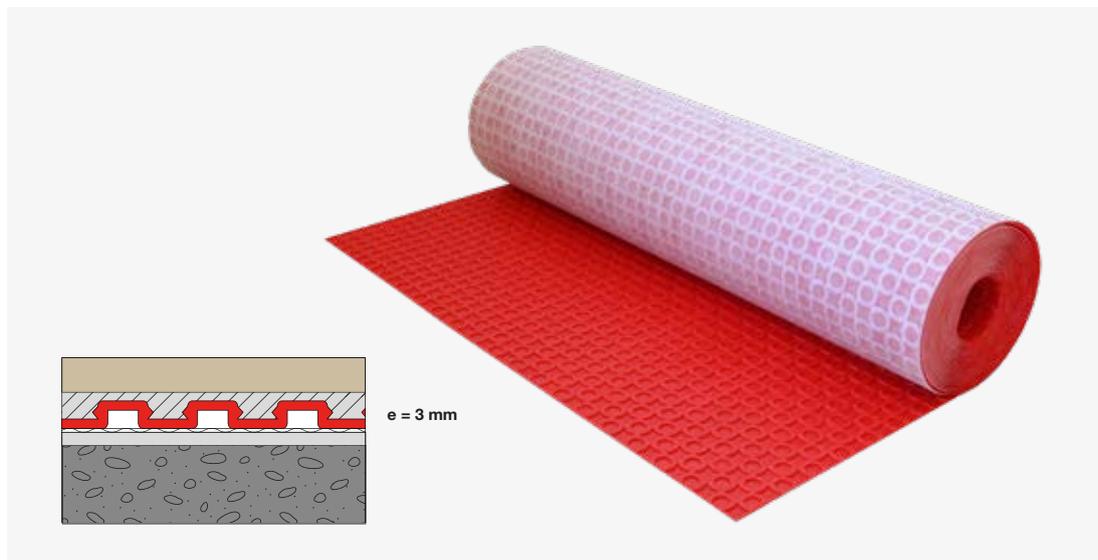


### Features

- » Uncoupling
- » Load sharing capacity
- » Better heat distribution
- » Decoupling
- » Vapour and moisture management
- » Waterproofing

### Specifications

- » Weight/m<sup>2</sup> (gr): 550
- » Width (m): 1
- » Length (m): 14, 30
- » NAIL - Mechanical anchor
- » Adherencia: 75 tons/m<sup>2</sup>
- » Robinson Floor Test - Extra Heavy

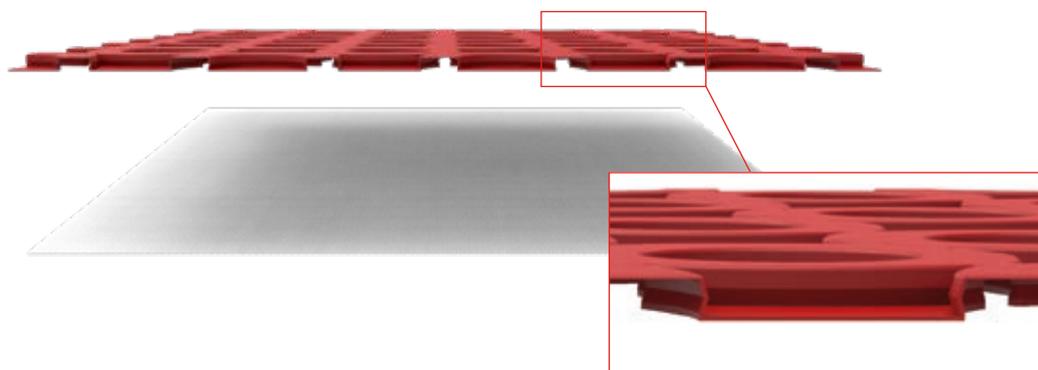

PRODUCT			LOGISTIC	
REF.	DESCRIPTION	MEASURE	PCS/BOX 	PCS/PALLET 
ILU5100	G-FLEX ROLL	1 x 14 m · 14 m <sup>2</sup>	1	20
ILU5200	G-FLEX ROLL	1 x 30 m · 30 m <sup>2</sup>	1	12

## MAXIMUM PROTECTION, ZERO BREAKAGE

The G-FLEX membrane is notable for its ability to **distribute loads**, which helps to protect cladding on large surfaces like terraces, squares, or high-traffic areas such as car parks or car dealerships.

This advantage is even greater for **large-format, thin ceramic** installations.





## EXAMPLE OF WATERPROOFING WITH G-FLEX



The G-FLEX membrane is suitable for use both indoors and outdoors. The tiling is protected by its ability to adapt to the movements of the subfloor, which evenly distributes heavy loads over the entire surface and prevents the ceramic from being affected by contraction or expansion. An ideal option for safeguarding ceramics, particularly those with small thicknesses and large formats.

Furthermore, its waterproof property provides an extra layer of protection against potential leaks or dampness, guaranteeing the longevity and integrity of your surfaces.

Thanks to the effectiveness of G-Flex in releasing and dissipating moisture from the floor slab in new construction, we can install in areas with high rainfall, even on previously damp surfaces, without having to wait for them to dry out.

REF.	DESCRIPTION	PERFORMANCE	PAGE	FORMAT
ILU5200	G-FLEX ROLL 1 x 30 m · 30 m <sup>2</sup>	-	28	ROLL
IG61000	W-S BAND 14	-	44	ROLL 14 cm x 20 m
IG60023	EASEAL 20 kg	60 m.l.	45	BAG



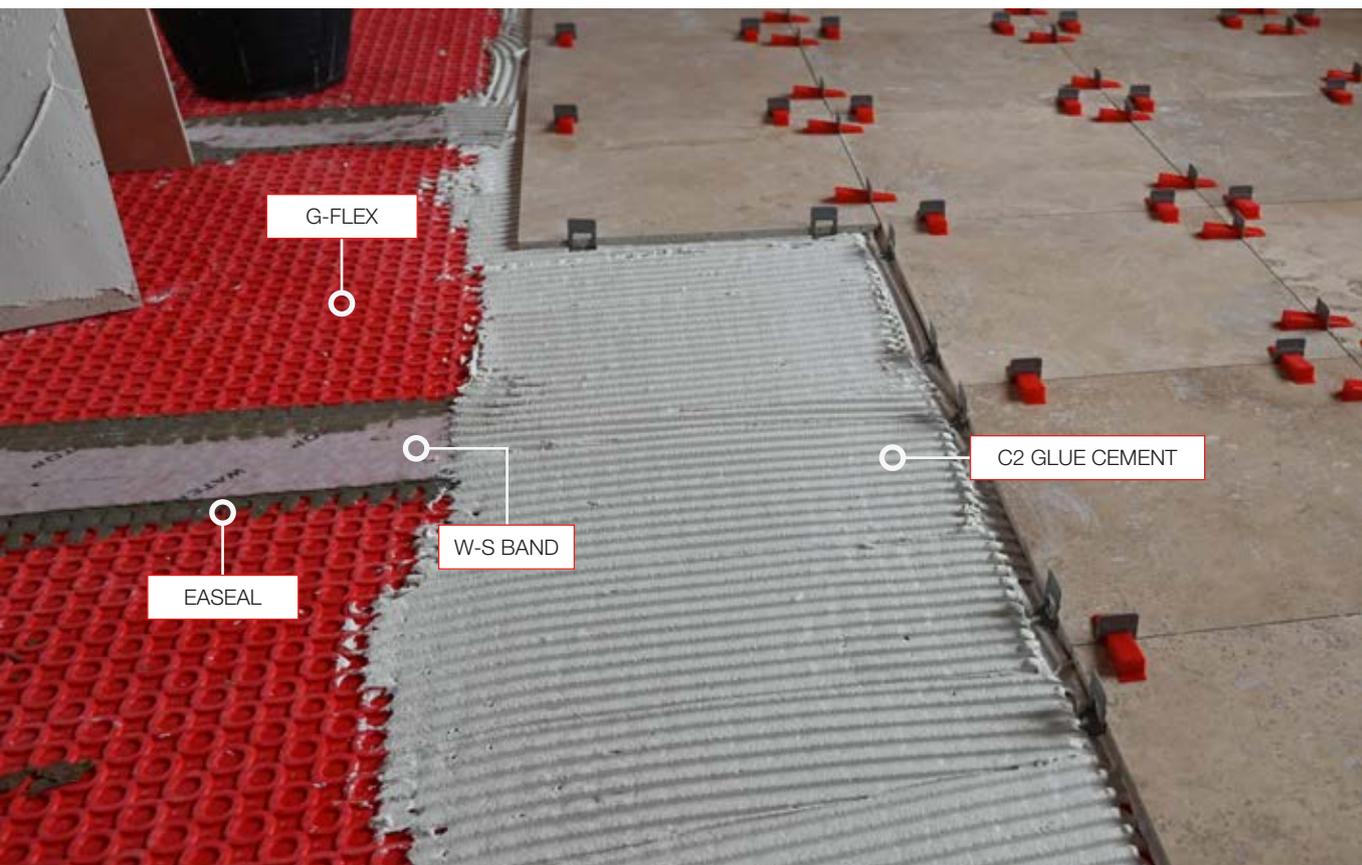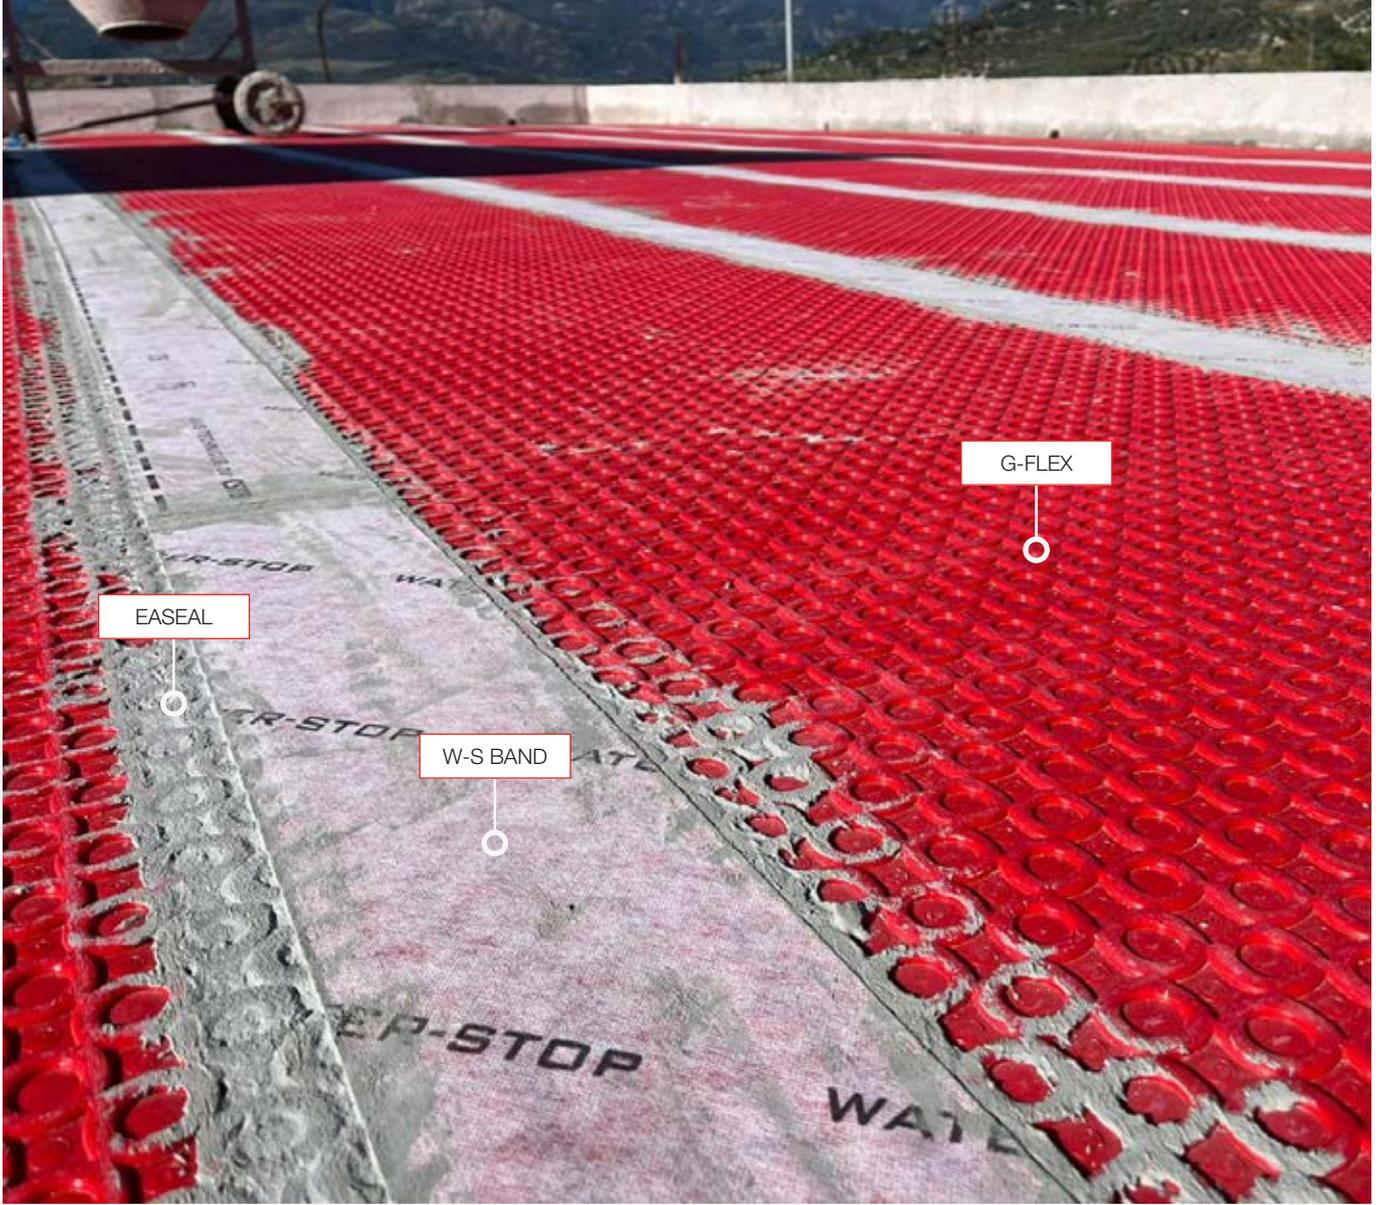

# INSTALLATION AGAINST NEGATIVE PRESSURE AND CAPILLARITY MOISTURE

Negative pressure moisture can be defined as the ability of water to infiltrate from the exterior of the house to the interior, potentially causing defects in the wall, the appearance of molds, unpleasant odors, and material detachment.

This type of problem often occurs in underground constructions, specifically in walls adjacent to embankments, garages, basements, or moisture rising by capillarity from the subsoil due to a high water table.


G-FLEX is a very useful solution to combat **negative pressure** moisture, as the space created between the waterproof membrane and the ground or wall allows moisture to escape from the construction, dissipating into the air and not affecting the structure.



REF.	DESCRIPTION	FORMAT
IG68000	G-WASHER (PACK 250 WASHERS)	BOX




The use of screws 5/6 mm thick and suitable wall plugs for the type of wall is recommended.

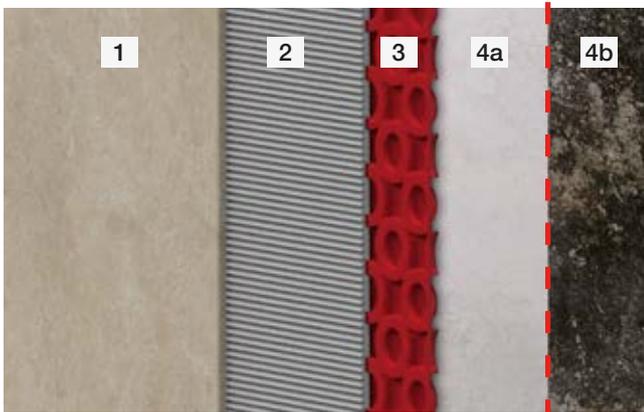

**Negative humidity with ceramic finish.**

- 1. Ceramics
- 2. Cement Glue C2
- 3. G-FLEX
- 4a. Prepared wall
- 4b. Wet wall

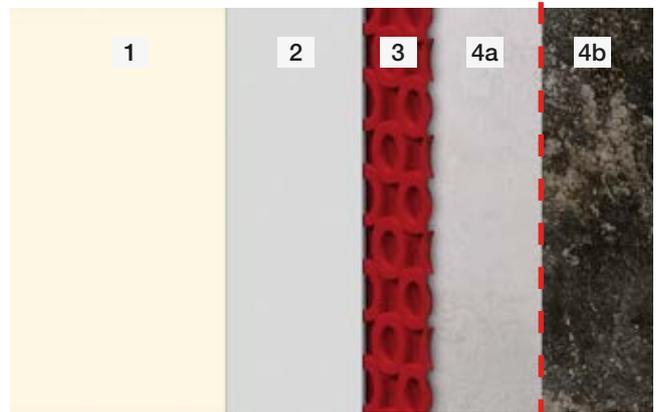

**Negative moisture plastered and painted.**

- 1. Painted wall
- 2. Plaster
- 3. G-FLEX
- 4a. Prepared wall
- 4b. Wet wall

## IMPACT MEMBRANE **G-SOUND**

**G-SOUND: The tranquillity of silence**

IDEAL FOR RENOVATIONS



G-SOUND is a revolutionary product family designed to **reduce impact noise** from 15 dB to 20 dB while saving space. It is an adhered membrane, eliminating the need for a thick mortar layer. The **total installation thickness is less than 1 cm** when used with thin flooring materials.


G-SOUND not only reduces noise but also **excels in renovation projects and includes waterproofing features**. This dual functionality ensures not only peace of mind against annoying noise but also **protection against moisture**, thanks to its waterproof nature.

Improve your spaces with G-SOUND impact membrane and enjoy the peace of mind you deserve.





Scan the QR code and discover more

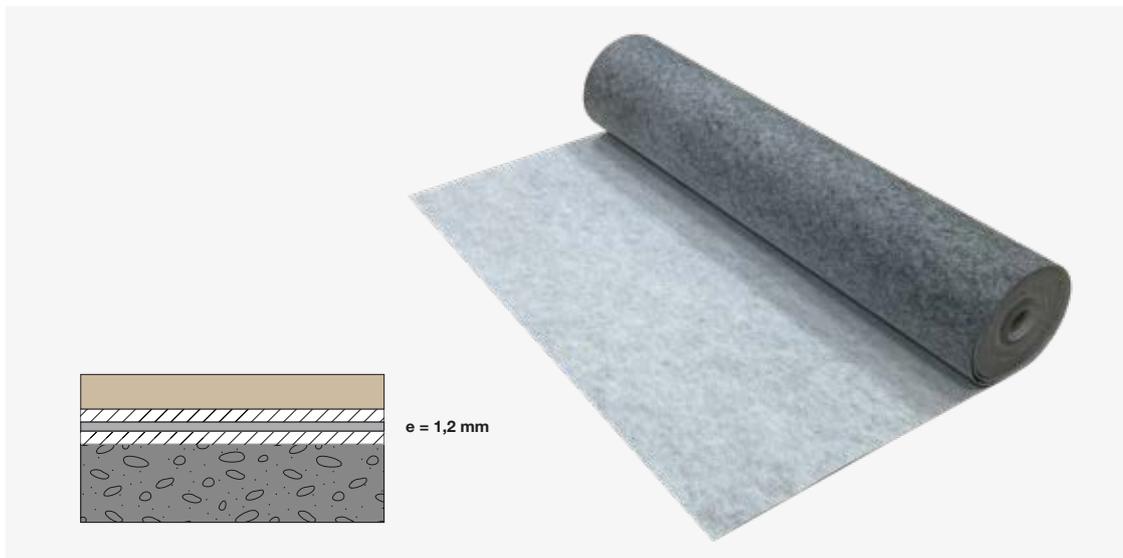

### Features

- » Minimum installation thickness: 3,5 mm with C2 - 1,2 mm membrane.
- » It can be used for waterproofing and decoupling.
- » Easy to work with, flexible and manoeuvrable.
- » Higher compressive strength than the materials currently available.
- » Lightweight and flexible.
- » Multifformat and multiproduct ceramic: it can be used with various types of cladding, paving, or natural stone.
- » Does not require a compression layer.

### Specifications

- » Total weight: 440 gr/m<sup>2</sup>.
- » Total product thickness: 1,2 mm.
- » Made from recycled products.
- » Impact sound reduction up to 15 dB and complete waterproofing.

PRODUCT			LOGISTICS	
REF.	DESCRIPTION	MEASURE	UDS/CAJA 	UDS/PALLET 
IU70000	G-SOUND ROLL	1 x 30 m · 30 m <sup>2</sup>	1	60

## IMPACT MEMBRANE G-SOUND PREMIUM

We are excited to introduce a new version of our impact sound reduction membrane: the G-SOUND PREMIUM membrane. This advanced membrane **effectively reduces impact sound levels by 20 dB**, with a **thickness of just 2.5 mm**. Its 2 x 10 m format is ideal for covering large areas.


G-SOUND PREMIUM not only minimizes annoying impact noise but also includes **waterproofing properties**, providing protection against both impact sound and moisture. Additionally, it is made from **recycled materials**, contributing to sustainability and environmental care.

### Features

- » Minimum installation thickness: 4,5 mm with C2 - 2,5 mm membrane.
- » It can also be used for waterproofing and uncoupling.
- » Easy to work with: it is flexible and manageable.
- » Higher compression resistance than currently available materials.
- » Lightweight and flexible.
- » Multifformat and multiproduct ceramic: it can be used with various types of cladding, paving, or natural stone.
- » Does not require a compression layer.

### Specifications

- » Total weight: 580 gr/m<sup>2</sup>
- » Total product thickness: 2,5 mm
- » Made from recycled products.
- » Impact sound reduction up to 20 dB and complete waterproofing.

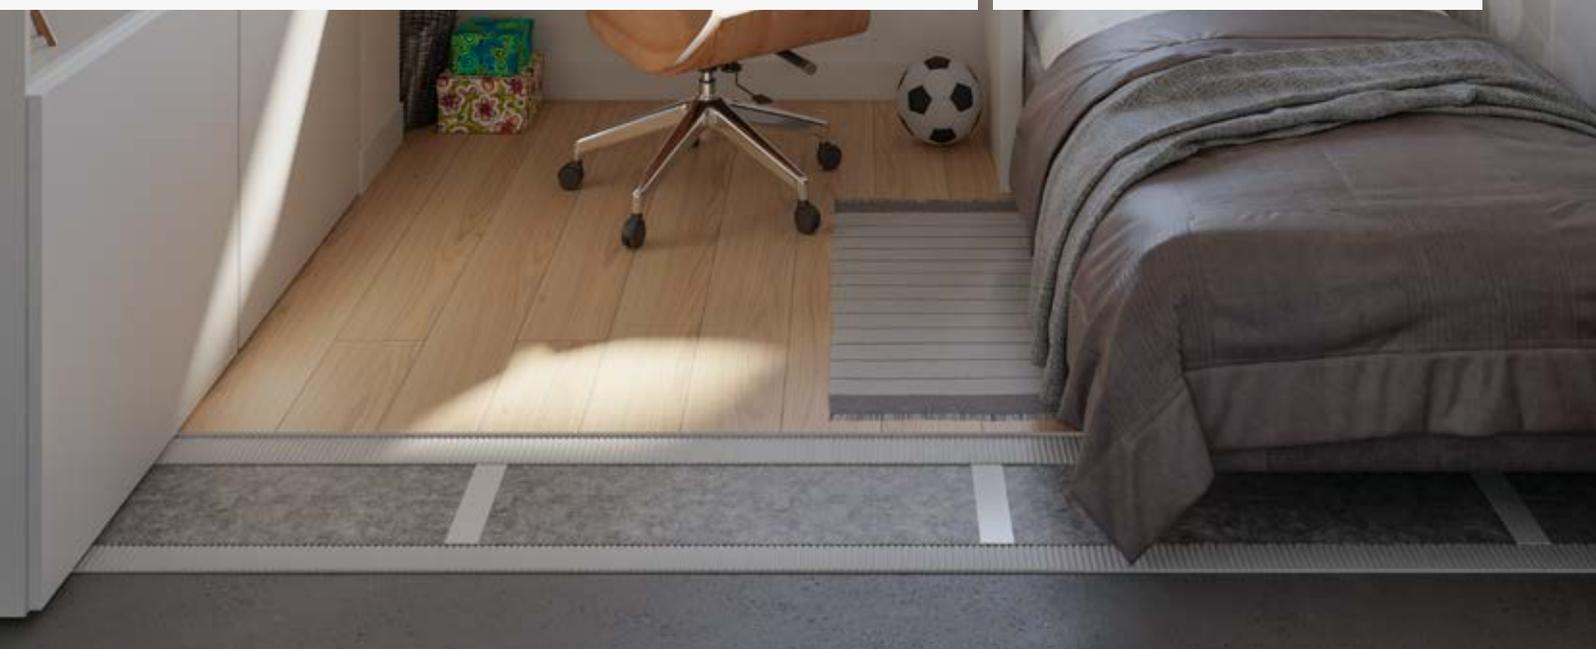

PRODUCT			LOGISTICS	
REF.	DESCRIPTION	MEASURE	UDS/BOX 	UDS/PALLET 
IU70100	G-SOUND PREMIUM ROLL	2 x 10 m · 20 m <sup>2</sup>	1	40


Tests carried out:

**G-SOUND**

**CALCULATIONS ACCORDING TO UNE-EN ISO 12354-2: 2018**

Reduction of impact sound pressure level  $\Delta L$  as a floating floor.

f (Hz)	$\Delta L$ (dB)		
	S01	S02	S03
100	-9,1	-31,0	-25,0
125	-6,2	-27,2	-21,1
160	-3,0	-22,9	-16,8
200	-0,1	-19,0	-13,0
250	2,8	-15,1	-9,1
315	5,8	-11,1	-5,1
400	9,0	-7,0	-0,9
500	11,9	-3,1	2,9
630	14,9	0,9	7,0
800	18,0	5,1	11,1
1000	20,9	9,0	15,0
1250	23,8	12,8	18,9
1600	27,0	17,1	23,2
2000	29,9	21,0	27,0
2500	32,8	24,9	30,9
3150	35,8	28,9	34,9
4000	39,0	33,0	39,1
5000	41,9	36,9	42,9

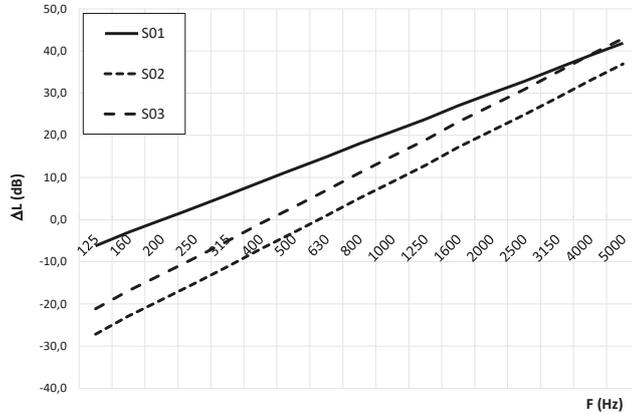

Weighted reduction of impact sound pressure level  $\Delta L_w$  for floating floors.

<b>S01:</b> Floating floor made of mortar.	<b><math>\Delta L_w</math> (dB): 15,2</b>	$m'$ (kg/m <sup>2</sup> ): 220	$f_0$ (Hz): 201
<b>S02:</b> Dry floating floor (PLASTERBOARD).	<b><math>\Delta L_w</math> (dB): 8,2</b>	$m'$ (kg/m <sup>2</sup> ): 25	$f_0$ (Hz): 597
<b>S03:</b> Dry floating floor (Wood).	<b><math>\Delta L_w</math> (dB): 6,3</b>	$m'$ (kg/m <sup>2</sup> ): 50	$f_0$ (Hz): 422

The calculations shown are based on Standard UNE-EN ISO 12354-2: 2018, Annex C, concerning floating floors. These data are indicative and must be experimentally verified.


**IMPACT NOISE REDUCTION: 15,2 dB**

**G-SOUND PREMIUM**

**CALCULATIONS ACCORDING TO UNE-EN ISO 12354-2: 2018.**

Reduction of impact sound pressure level  $\Delta L$  as a floating floor.

f (Hz)	$\Delta L$ (dB)		
	S01	S02	S03
100	-4,2	-24,4	-18,4
125	-1,3	-20,6	-14,6
160	2,0	-16,3	-10,3
200	4,9	-12,4	-6,4
250	7,8	-8,5	-2,5
315	10,8	-4,5	1,5
400	13,9	-0,4	5,7
500	16,8	3,5	9,5
630	19,8	7,5	13,5
800	22,9	11,7	17,7
1000	25,8	15,6	21,6
1250	28,7	19,4	25,4
1600	32,0	23,7	29,7
2000	34,9	27,6	33,6
2500	37,8	31,5	37,5
3150	40,8	35,5	41,5
4000	43,9	39,6	45,7
5000	46,8	43,5	49,5

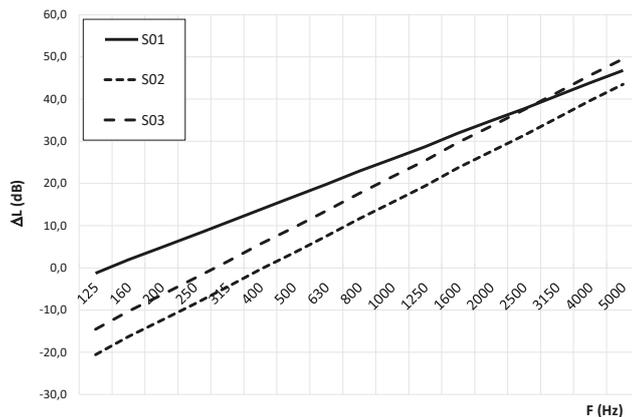


Weighted reduction of impact sound pressure level  $\Delta L_w$  for floating floors.

<b>S01:</b> Floating floor made of mortar	<b><math>\Delta L_w</math> (dB): 19,8</b>	$m'$ (kg/m <sup>2</sup> ): 220	$f_0$ (Hz): 138
<b>S02:</b> Dry floating floor (PLASTERBOARD).	<b><math>\Delta L_w</math> (dB): 11,6</b>	$m'$ (kg/m <sup>2</sup> ): 25	$f_0$ (Hz): 409
<b>S03:</b> Dry floating floor (Wood).	<b><math>\Delta L_w</math> (dB): 11,5</b>	$m'$ (kg/m <sup>2</sup> ): 50	$f_0$ (Hz): 289


The calculations shown are based on the UNE-EN ISO 12354-2: 2018 Standard, Annex C, regarding floating floors. These data are indicative and must be experimentally verified.

**IMPACT NOISE REDUCTION: 19,8 dB**

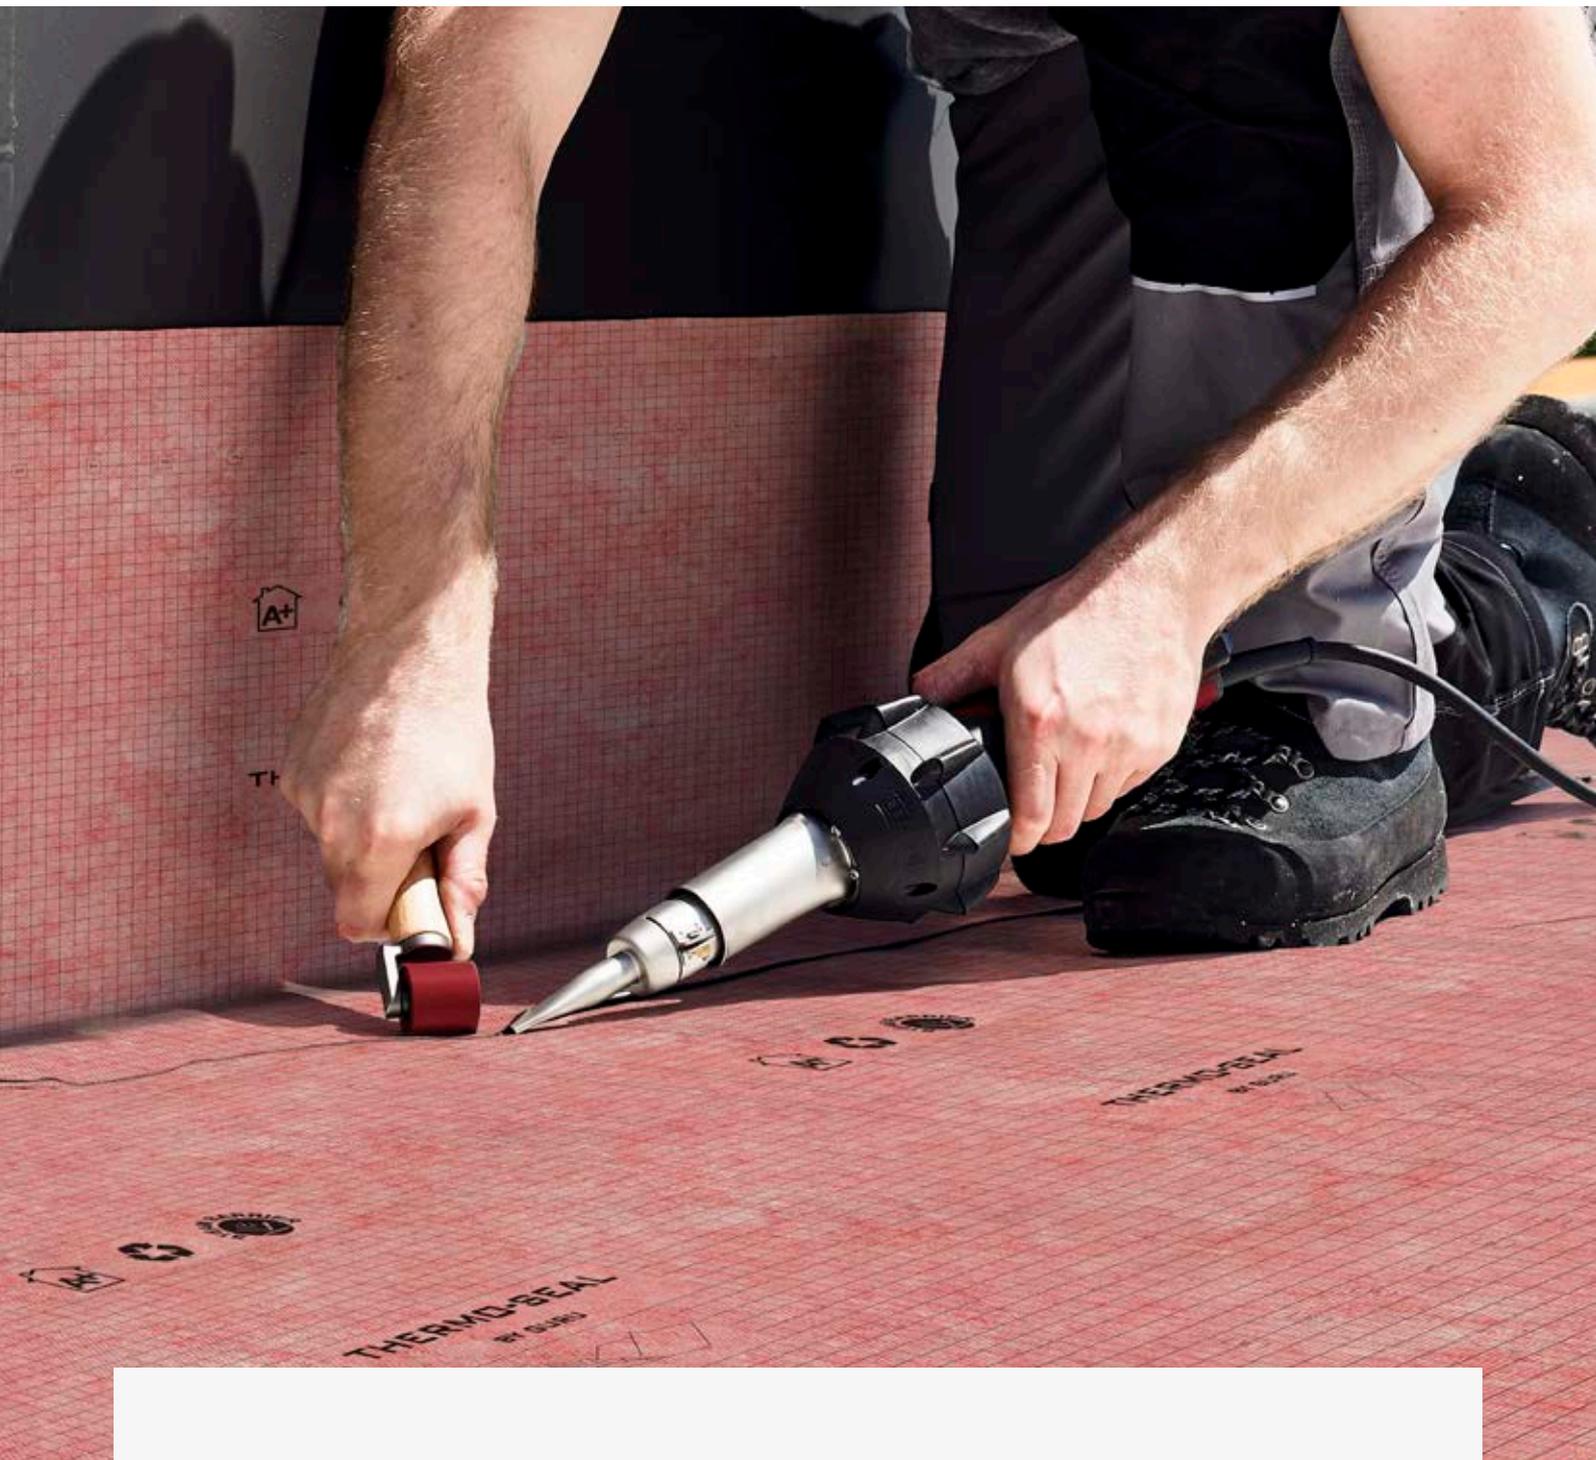WATERPROOF HEAT-WELDABLE MEMBRANE **THERMO SEAL**

THERMO SEAL is a **waterproof** and **heat-weldable** geotextile membrane that delivers exceptional protection and performance. Its central layer, with a higher plastic content, enables joint sealing using a thermal welder, ensuring continuous and uninterrupted waterproofing.

Composed of multiple layers, it includes a waterproof membrane **reinforced** with a high-strength plastic film (PP), covered on both sides with a non-woven fabric of polyester and polypropylene, providing **durability** and versatility.

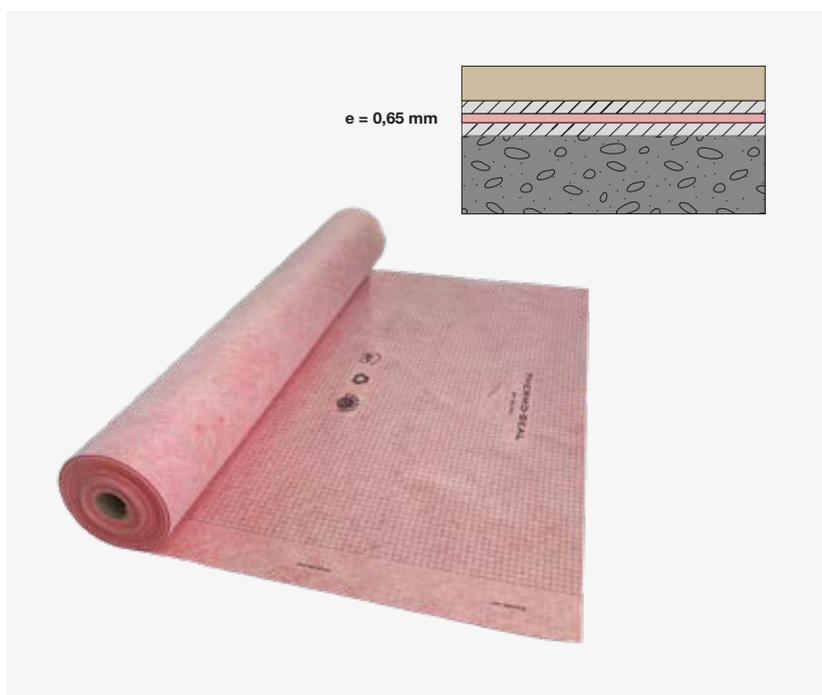

### Features

- » Complete waterproofing.
- » Ability to thermally fuse overlaps using a hot air welder and roller.
- » Membrane reinforced with a high-strength layer.

### Specifications

- » Available sizes: 1 x 30 m, 2 x 20 m and 1,5 x 20 m
- » Total weight: 340 g/m<sup>2</sup>
- » Membrane thickness: 0,65 mm

PRODUCT			LOGISTICS	
REF.	DESCRIPTION	MEASURE	UDS/BOX 	UDS/PALLET 
IR52000	THERMO SEAL	1 x 30 m	4	100
IR53000	THERMO SEAL	2 x 20 m	4	100
IR54000	THERMO SEAL	1,5 x 20 m	5	100

**BREATHABLE MEMBRANE W-S AIR**



It is a waterproof yet water vapor-permeable membrane used for vapor control in pitched roofs and ventilated façades. It is installed beneath the protective layer and above the load-bearing structure, supported on beams, concrete slabs, wood panels, or directly on thermal insulation.

PRODUCT			LOGISTICS	
REF.	DESCRIPTION	MEASURE	UDS/BOX 	UDS/PALLET 
IH70001	W-S AIR	1,5 x 50 m	3	40




## Features

- » Installation on sloped surfaces > 5%
- » Totally watertight
- » High vapour permeability.
- » Simple installation (overlap marking).
- » Protection of the structure from the effects of moisture.
- » Prevents heat loss through convection and condensation.

## Specifications

- » Total weight: 130 gr/m<sup>2</sup>
- » Microporous film
- » Thickness: 0,4 mm
- » Non-woven veil on both sides

## Reinforcements for critical points

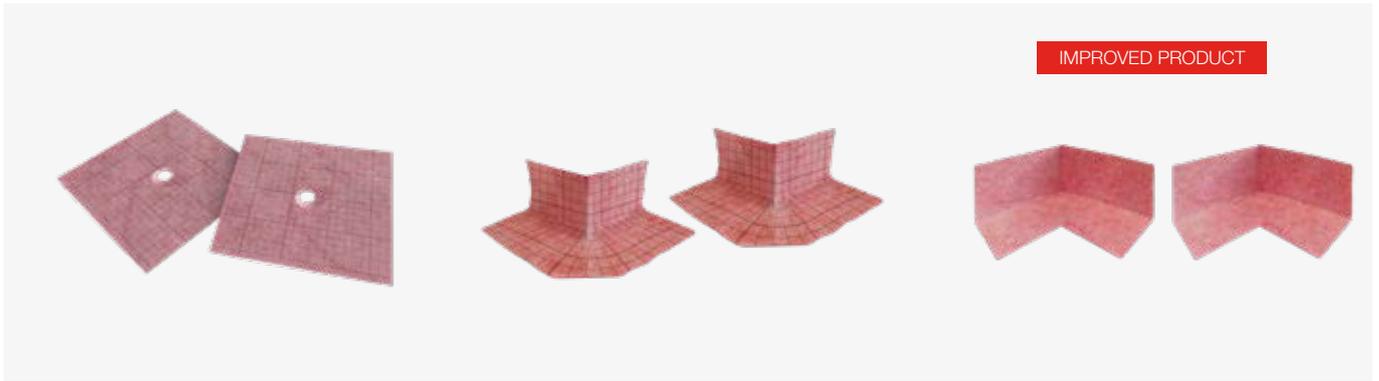

**W-S TUB**  
Pipe reinforcement. Ø18- Ø 22 mm

**W-S DEX**  
Outer corner strengthener 90°.

**W-S DIN**  
Inner corner strengthener 90°.

REF.	DESCRIPTION	FORMAT
IG60004	W-S TUB	Bag 2 pcs.
IGU6005	W-S DEX	Bag 2 pcs.
IGU6006	W-S DIN	Bag 2 pcs.

## Joining elements



**W-S BAND 14 / 34**  
Reinforcement and termination at joints with vertical parameters and joints of joinings.

**SAFETUB**  
Adaptable pipe reinforcement. Used for pipes, single-lever mixers, roof ventilating chimneys etc.

**W-S PASSTUB**  
Heat-welded pipe reinforcement.  
*\* Check the possibility of customizing the pipe diameter.*

REF.	DESCRIPTION	MEASURE	FORMAT
IG61000	W-S BAND 14	14 cm x 20 m	Roll
IG62000	W-S BAND 34	34 cm x 20 m	Roll
IG60020	SAFETUB	Ø 32-50	Bag 5 pcs.
IG60021	SAFETUB	Ø 63-75	Bag 5 pcs.
IG60022	SAFETUB	Ø 90-128	Bag 5 pcs.
IG56021	W-S PASSTUB	Ø 50 mm	Bag 1 pc.
IG56022	W-S PASSTUB	Ø 75 mm	Bag 1 pc.
IG56023	W-S PASSTUB	Ø 90 mm	Bag 1 pc.
IG56024	W-S PASSTUB	Ø 110 mm	Bag 1 pc.

**Tools**



**G-TROWEL 3** General purpose WATER-STOP membrane. Ideal for mosaics.  
**G-TROWEL 4,5** General purpose WATER-STOP membrane. Ideal for large formats.  
**G-TROWEL 6** General purpose with G-FLEX membrane.

**W-SPATULA**  
 General use WATER-STOP sheet.  
 Used to expel excess air during the installation of the W-S sheet.

REF.	DESCRIPTION	MEASURE	FORMAT
IG67000	G-TROWEL	3 x 3 mm (tooth)	1 piece
IG67001	G-TROWEL	4,5 x 4,5 mm (tooth)	1 piece
IG67002	G-TROWEL	6 x 6 mm (tooth)	1 piece
IG67003	W-SPATULA	-	1 piece

**Adhesives**



**EASEAL**  
 Single component mortar. Elastic and flexible waterproofing material.  
 20 kg bag // 3 kg bucket.

**W-S BUTIL**  
 Two-sided adhesive sealing tape for joints.  
 Measurements: 5 cm x 10 m.

**W-S MASTIC**  
 High-module MS polymer adhesive sealer.  
 290 ml can.

REF.	DESCRIPTION	MEASURE	FORMAT	PERFORMANCE
IG60023	EASEAL	20 kg	Bag	Variable *
IG60024	EASEAL	3 kg	Bucket	Variable *
IG63000	W-S BUTIL	5 cm x 10 m	Roll	10 m
IG64000	W-S MASTIC	290 ml	Tube	6 m

\* Performances/consumption for bonding and sealing joints between sheets according to the type of joint:


Overlap of WATER-STOP membrane	± 0,07 kg/m	1 kg ≈ 14 m
WATER-STOP membrane with joint cover W-S BAND 14	± 0,20 kg/m	1 kg ≈ 5 m
G-FLEX membrane with W-S BAND 14 band	± 0,33 kg/m	1 kg ≈ 3 m

# DRAINAGE SYSTEMS FOR OUTDOOR USE

Thanks to the innovative approach that defines Estil Guru, we have developed and manufactured a range of advanced **outdoor** drainage systems, specifically designed for patios, squares, terraces, pool decks, and roofs.

These systems combine **efficiency and design**, elevating the standard of outdoor drainage to a new level.

Among these new options, you will find both one-time and continuous choices, allowing for adaptation to various outdoor spaces and any type of need.

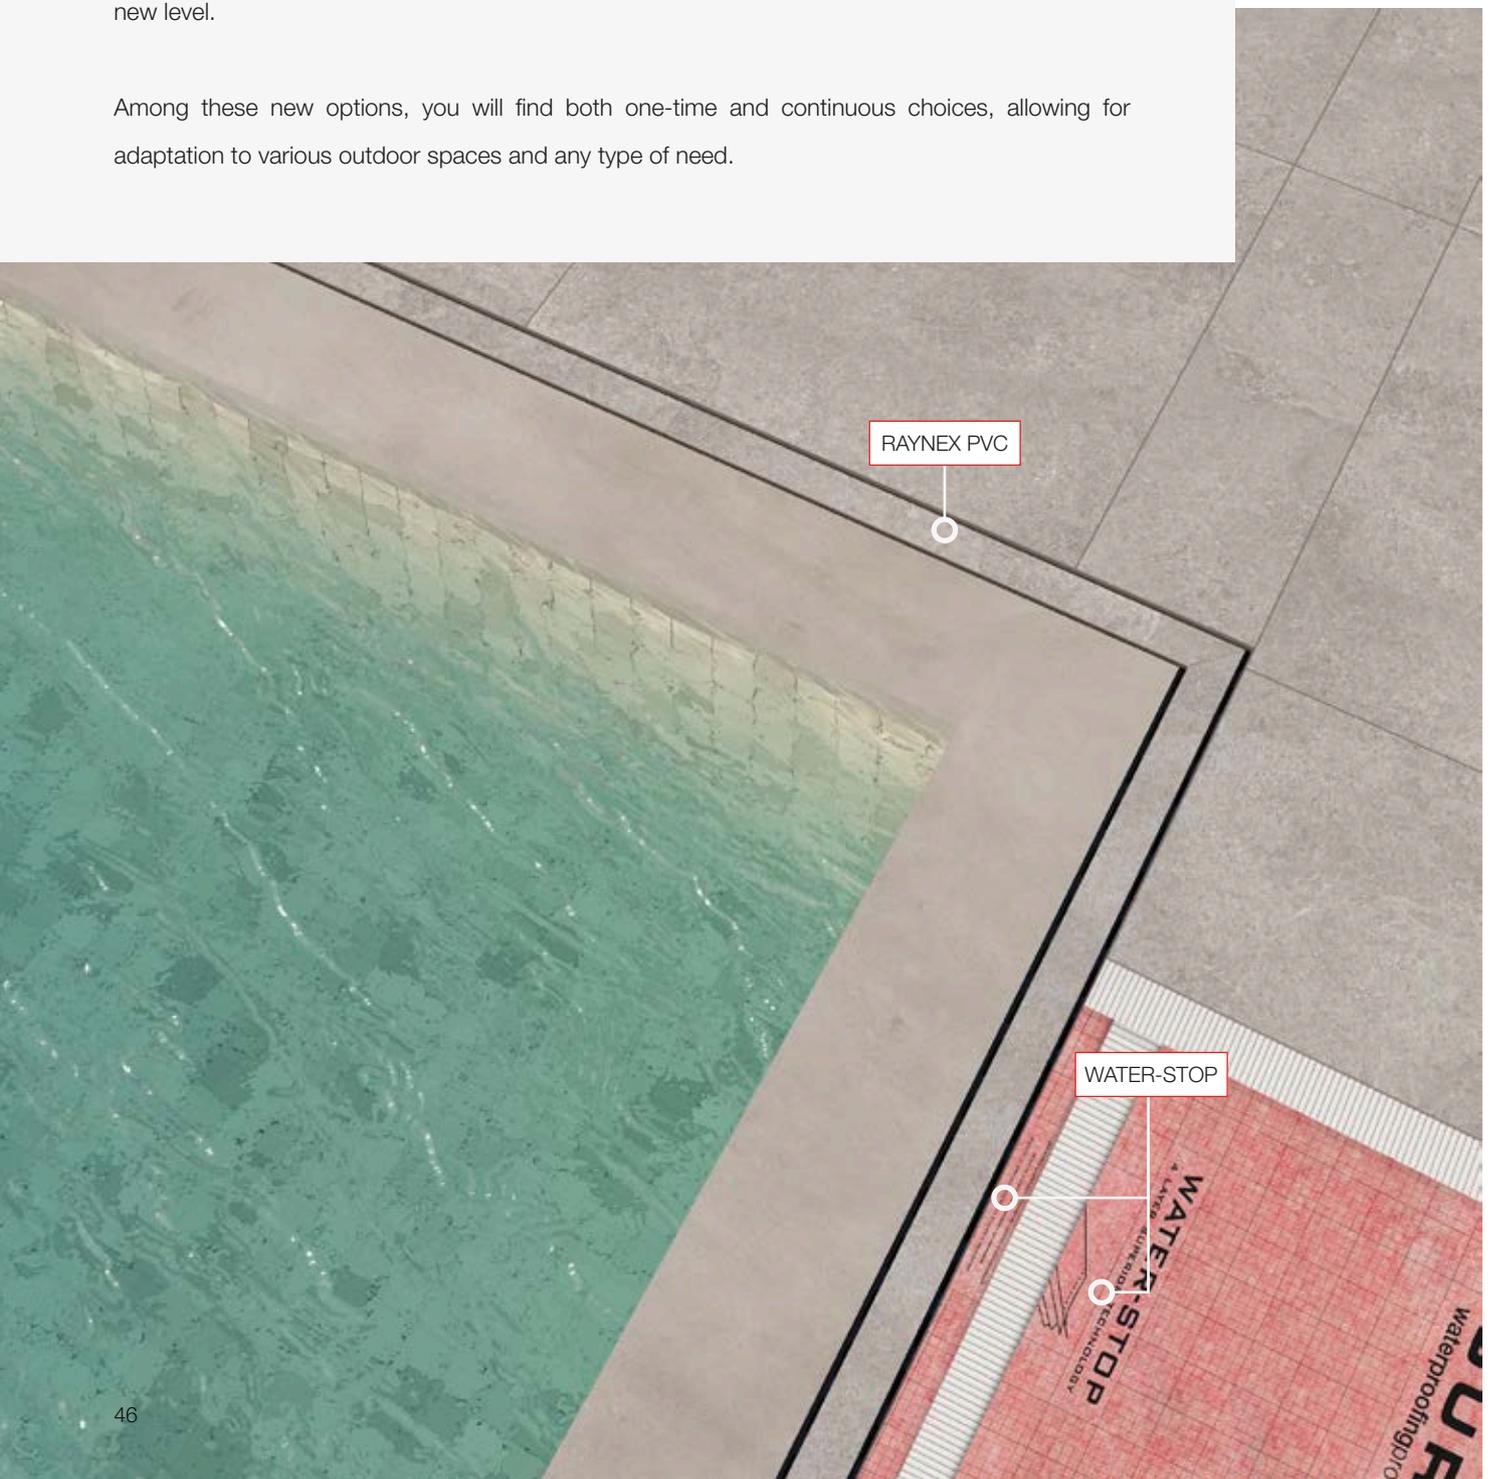



RAYNEX PREMIUM  
UNIQUE SLOT



KIT TERRACE PLUS

Discover our  
outdoor drainage  
systems

MODULAR LINEAR DUCT FOR OUTDOOR USE **RAYNEX PREMIUM**

The exterior does matter, A LOT!



PRODUCT			LOGISTICS	
REF.	DESCRIPTION	MEASURE	UDS/BOX 	UDS/PALLET 
IX45300	CHANNEL AND GRATE RAYNEX PREMIUM <b>DOUBLE SLOT</b>	120 cm	8	72
IX45301	CHANNEL AND GRATE RAYNEX PREMIUM <b>DOUBLE SLOT</b> WITH WATER-STOP MEMBRANE	120 cm	6	54
IX45400	CHANNEL AND GRATE RAYNEX PREMIUM <b>UNIQUE SLOT</b>	120 cm	8	72
IX45401	CHANNEL AND GRATE RAYNEX PREMIUM <b>UNIQUE SLOT</b> WITH WATER-STOP MEMBRANE	120 cm	6	54


Installation components:

IX45302	90° ANGLE INTEGRA PREMIUM GRATE <b>DOUBLE SLOT</b>	-	200	-
IX45303	90° ANGLE INTEGRA PREMIUM GRATE <b>DOUBLE SLOT</b> WITH WATER-STOP MEMBRANE	-	200	-
IX45402	90° ANGLE INTEGRA PREMIUM GRATE <b>UNIQUE SLOT</b>	-	200	-
IX45403	90° ANGLE INTEGRA PREMIUM GRATE <b>UNIQUE SLOT</b> WITH WATER-STOP MEMBRANE	-	200	-
IX45404	INSPECTION COVER INTEGRA PREMIUM GRATE <b>UNIQUE SLOT</b>	-	4	108

RAYNEX PREMIUM is the ultimate solution for outdoor drainage, featuring two **stainless steel grate designs** and the option for **integrated waterproofing**.

The first option (2A) features a **single drainage slot**, offering a more modern and elegant appearance without compromising drainage capacity. Additionally, for easy maintenance, it includes a **tileable inspection cover** as an installation option.


The second option (2B) features a **double drainage slot**, enabling a fully accessible installation for **easy channel cleaning**. It is also paveable, allowing seamless integration with all types of finishes.

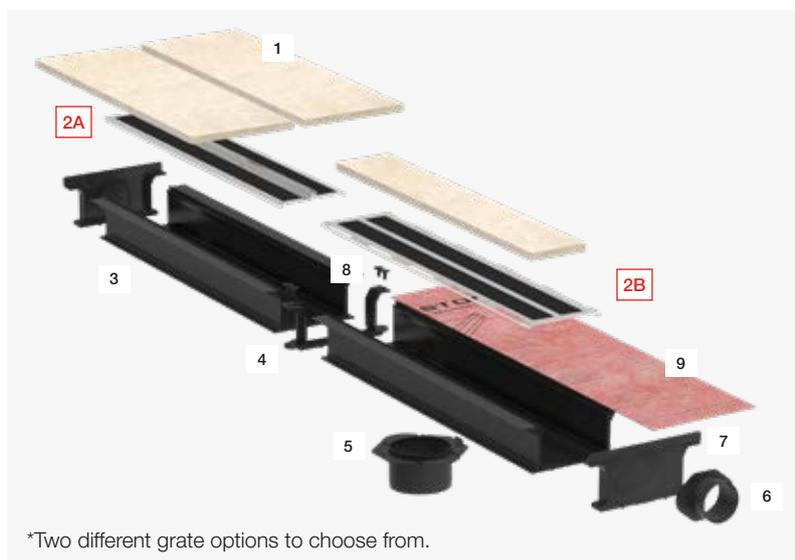


- 1. Paving
- 2. Stainless steel grate\*
  - 2A. Unique slot
  - 2B. Double slot
- 3. Channel
- 4. Joint/Connector
- 5. Water outlet Ø90 mm
- 6. Water outlet Ø50 mm
- 7. Side cover
- 8. Joining rivets
- 9. WATER-STOP overlap (optional)

\*Two different grate options to choose from.


**Unique slot - 2A**

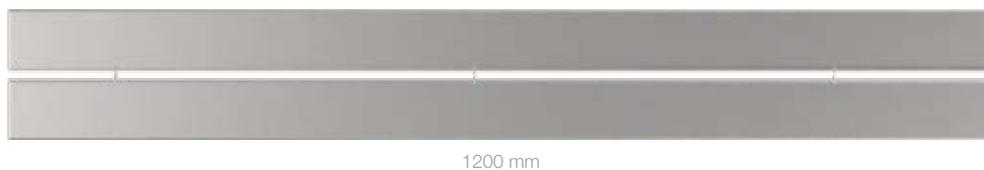


**\*Installation height:**



**Double slot - 2B**



**Inspection cover in RAYNEX PREMIUM with a single slot:**

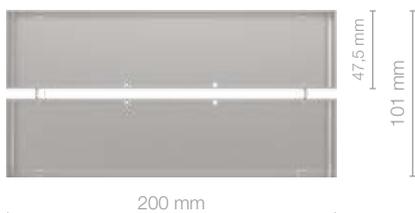

\*Includes anti-slip tape

MODULAR LINEAR DUCT FOR OUTDOOR USE **RAYNEX PVC**



\*RAYNEX channel and grate with double slot and waterproofing.

**Features**

- » Pavementable and 100% removable grid for cleaning.
- » Adaptable to construction.
- » Material with UV protection for outdoor exposure.
- » Lightweight yet sturdy material, certified A15.
- » High drainage capacity.
- » Integrated low-weight waterproofing in the channel.
- » Supports vehicular traffic up to 1.500kg.
- » PVC adhesive joints

**Specifications**

- » EN1433
- » Class A15 for light traffic
- » Open area: 6000 mm<sup>2</sup>/meter
- » Installation height:






Scan the QR code and discover more

Following the same line as RAYNEX PREMIUM, we present a more competitive version with a **PVC grate**, also available with **integrated waterproofing**.

Its compact and **lightweight** design, combined with a **sturdy structure**, can withstand light traffic of up to 1500 kg. Additionally, its integrated pavement option makes it an elegant and discreet channel.

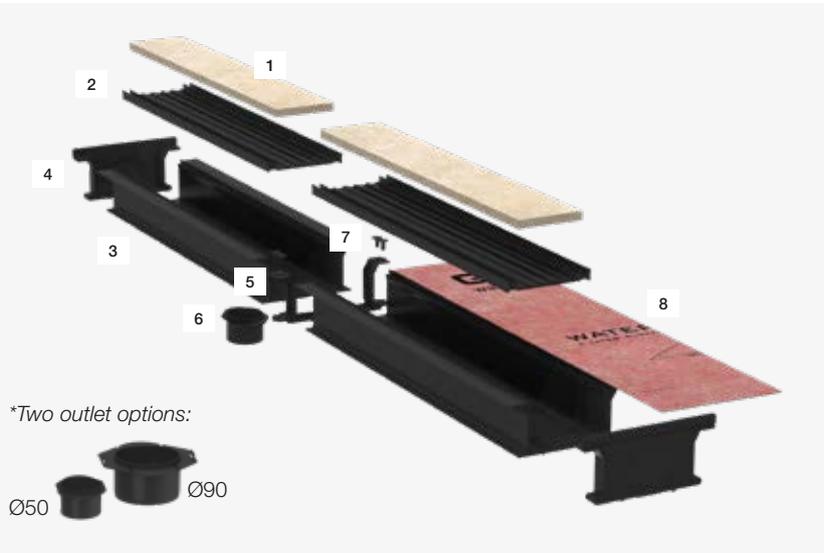

1. Paving (Width: 76 mm)
2. Grid
3. Channel
4. Side cover
5. Joint/Connector
6. Water outlet \*
7. Rivets
8. WATER-STOP overlap (optional)

PRODUCT			LOGISTICS	
REF.	DESCRIPTION	MEASURE	UDS/BOX 	UDS/PALLET 
IX45120	CHANNEL AND GRATE RAYNEX PVC DOUBLE SLOT	120 cm	8	96
IX45121	CHANNEL AND GRATE RAYNEX PVC DOUBLE SLOT WITH WATER-STOP MEMBRANE	120 cm	6	72
IX45200	CHANNEL AND GRATE RAYNEX PVC DOUBLE SLOT	200 cm *	8	100
IX45201	CHANNEL AND GRATE RAYNEX PVC DOUBLE SLOT WITH WATER-STOP MEMBRANE	200 cm *	8	100

Installation components:

IX10000	JOINT	-	200	-
IX10001	SIDE COVER	-	200	-
IX10002	PIPE DIAMETER Ø50 mm	-	25	3500
IX10004	PIPE DIAMETER Ø90 mm	-	3	420
IX10003	ANGLE 90° RAYNEX PVC	-	4	108
IX10005	ANGLE 90° RAYNEX PVC WITH WATER-STOP	-	4	108

For 200 cm channel and grate, MINIMUM ORDER OF 8 UNITS.


\*\* For large projects, the channel length can be customized up to 3 meters.

## OUTDOOR DRAIN KIT TERRACE

The terrace kit is a solution to complete the waterproof protection on terraces and balconies thanks to the heat-welded cup with the WATER-STOP membrane.

It consists of a PVC bowl with the specified outlet, the heat-welded membrane and a trap body with a PVC grille.


25 mm trap drain with hydraulic closure. Horizontal or vertical output.

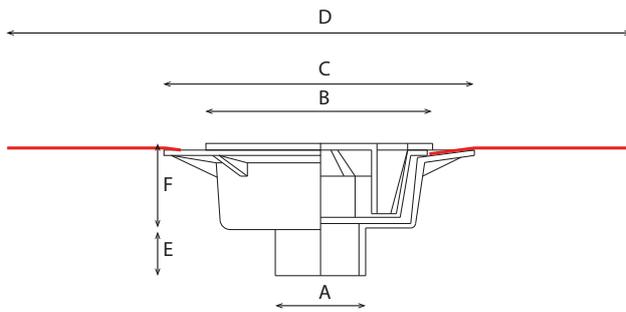

measurements in mm

<b>A</b> = 90 o 110	<b>D</b> = 600
<b>B</b> = 200	<b>E</b> = 50
<b>C</b> = 290	<b>F</b> = 92

PRODUCT			LOGISTICS
REF.	DESCRIPTION	OUTPUT	UDS/BOX 
IE46000	KIT TERRACE V90	VERTICAL DN/DE 90	6
IE46001	KIT TERRACE V110	VERTICAL DN/DE 110	6

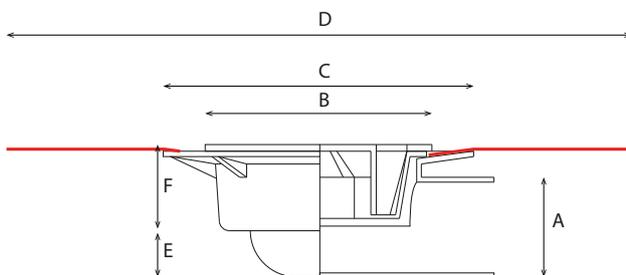

measurements in mm



<b>A</b> = 90 o 110	<b>D</b> = 600
<b>B</b> = 200	<b>E</b> = 42
<b>C</b> = 290	<b>F</b> = 92

PRODUCT			LOGISTICS
REF.	DESCRIPTION	OUTPUT	UDS/BOX 
IE46002	KIT TERRACE H90	HORIZONTAL DN/DE 90	6
IE46003	KIT TERRACE H110	HORIZONTAL DN/DE 110	6

## OUTDOOR DRAIN KIT TERRACE PLUS

This product is notable for its precise manufacturing process using **high-quality** materials that are specifically designed to withstand **corrosion, weathering, and temperature changes**. By meeting the most rigorous **quality standards**, this product guarantees **exceptional durability** and optimal performance over time. The innovative design facilitates installation, providing an efficient solution for both professional and non-specialist users.

This product is characterised by its **simplicity** and **efficiency** in installation. Each component has undergone thorough quality testing to ensure structural integrity and optimal performance in various environmental conditions. In addition to its excellent quality, this product is also affordable, striking a **perfect balance** between **durability, performance, and price competitiveness**.

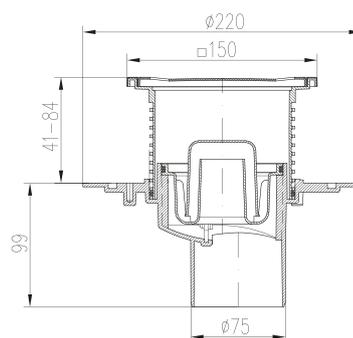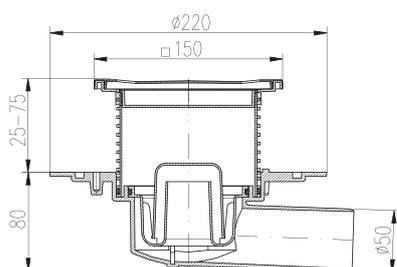

PRODUCT					LOGISTICS
REF.	DESCRIPTION	OUTPUT	FLOW RATE (l/min)		UDS/ BOX
			S.H.*	S.S.*	
IE46007	KIT TERRAZA PLUS V75	SALIDA VERTICAL DN/DE 75	45	100	6
IE46008	KIT TERRAZA PLUS H50	SALIDA HORIZONTAL DN/DE 50	45	100	6

\*H.S.: Hydraulic Siphon | D.S.: Dry Siphon

# SHOWER SYSTEMS WITH WATERPOOFING INCLUDED



Estil Guru shower systems have exclusive designs and technologies that improve drainage and facilitate waterproofing of bathrooms.

Our philosophy has always been to combine design with efficiency, creating stainless steel systems that are integrated for microcement and available in various sizes, designs, and colours.

Furthermore, all our drainage systems are equipped with waterproofing and can be selected with various drainage options to meet any requirement.




Find out more information about our waterproof membranes



# TRYPHON

New drain with **removable siphon**  
and high **drainage capacity**

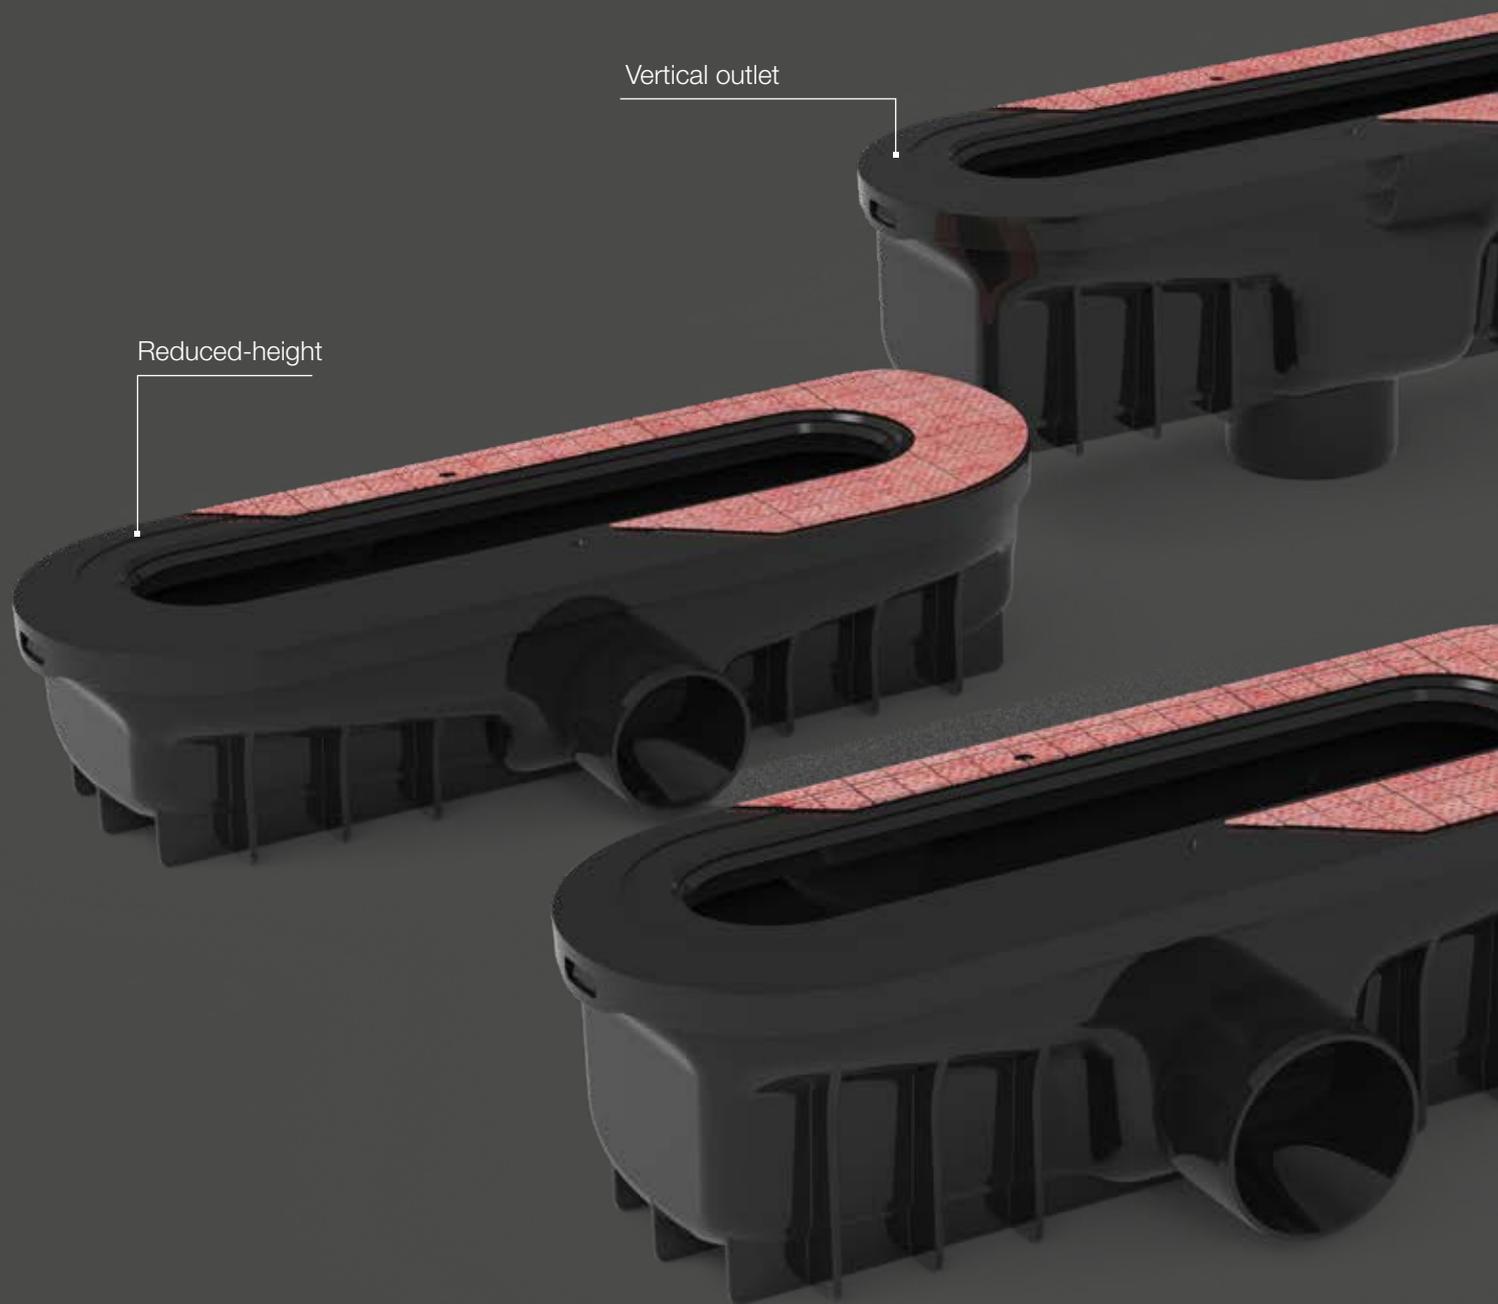

# RUBER

**Adjustable** and **self-cleaning** drain  
with **multiple height options**



TRYPHON  
vs  
RUBER



Reduced-height






**DRAIN TRYPHON**

Join the new generation of drainage systems featuring removable siphons

Drainage capacity:

**< 68 L/min**

Two siphon options:  
dry or hydraulic.

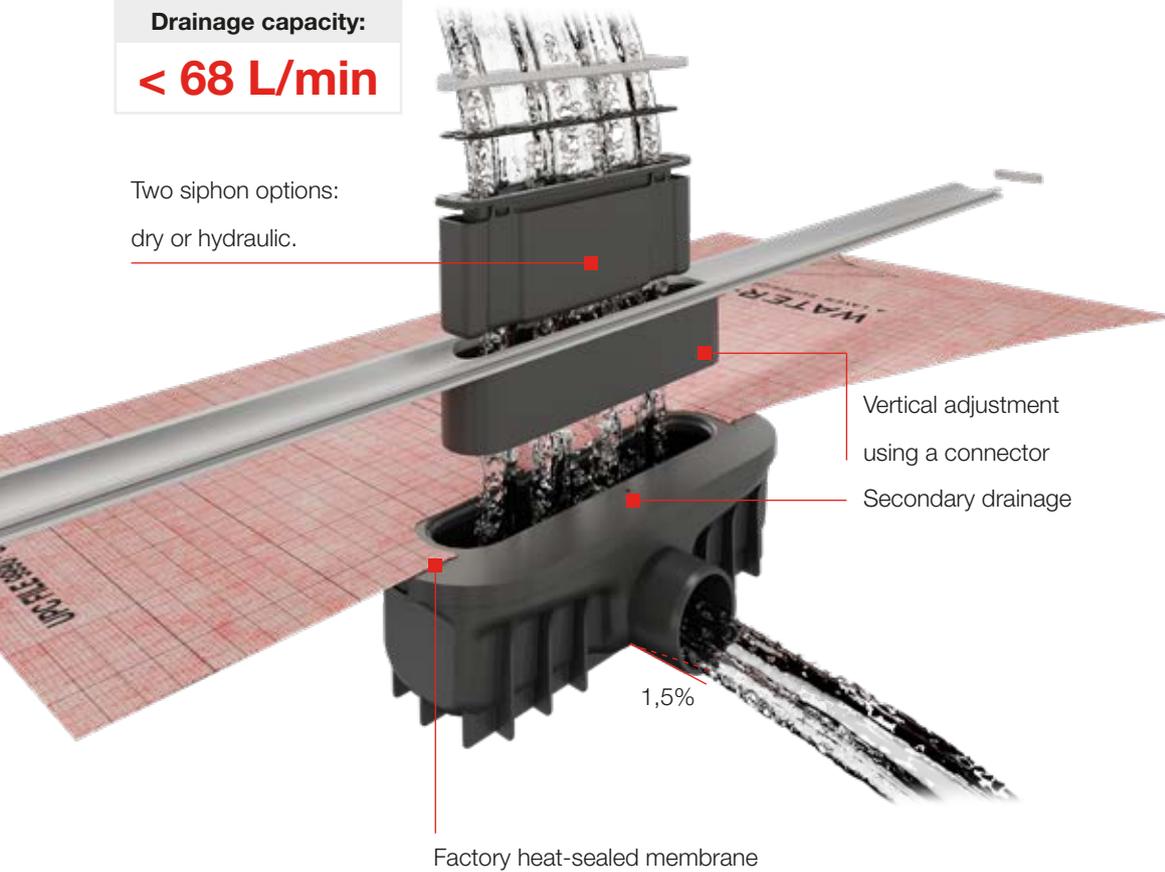

REF.	DESCRIPTION
IG60036	TRYPHON SIPHON TRAP
IG60031	TRYPHON REDUCED SIPHON TRAP
IG60032	TRYPHON VERTICAL SIPHON TRAP

TRYPHON is the perfect fusion of functionality and innovation. With a **removable siphon** for easy cleaning, TRYPHON redefines your bathroom drainage. It offers **two siphon options, dry and hydraulic**, to meet the specific needs of each installation. Additionally, the collector design allows for a **vertical adjustment capacity of 35 mm**. Combined with the option of **ground-level installation**, this ensures the drain integrates perfectly into various configurations. Furthermore, TRYPHON **includes factory heat-sealed waterproofing**, ensuring long-lasting and safe protection.

With an impressive drainage capacity ranging from 30 L/min to 68 L/min, depending on the selected model (exceeding the regulatory requirement of 24 L/min), TRYPHON guarantees exceptional performance. The self-cleaning function minimizes the need for constant maintenance, while the three outlet flow options (**horizontal, reduced-height horizontal, and vertical**) provide installation flexibility. Notably, the **vertical outlet** option stands out as an innovative feature rarely found in the market. This adds versatility and efficiency to your project.

**TRYPHON**



**Front outlet**

Hydraulic Siphon 50 mm + Dry Siphon

**TRYPHON REDUCED**



**Reduced-height front outlet**

Dry Siphon



**TRYPHON VERTICAL**



**Vertical outlet**



Hydraulic Siphon 50 mm + Dry Siphon

**TRYPHON: DN/DE 50 mm output**

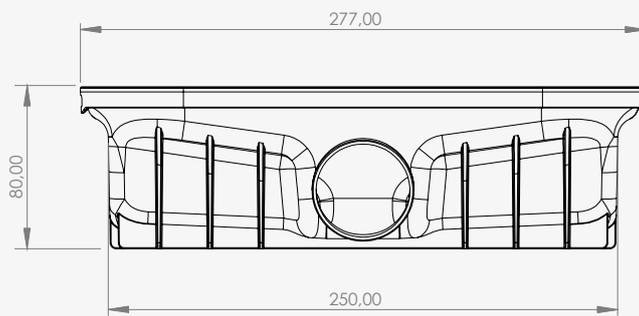



Measurements in mm

**TRYPHON REDUCED: DN/DE 40 mm output**

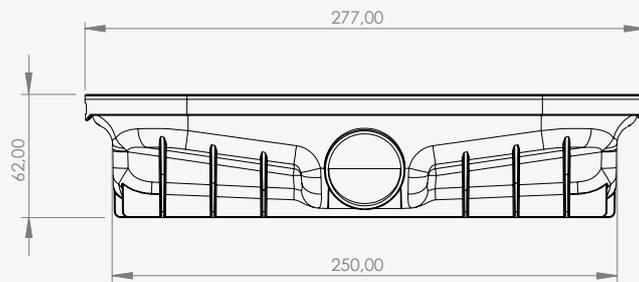

Measurements in mm

**TRYPHON VERTICAL: DN/DE 50 mm output**


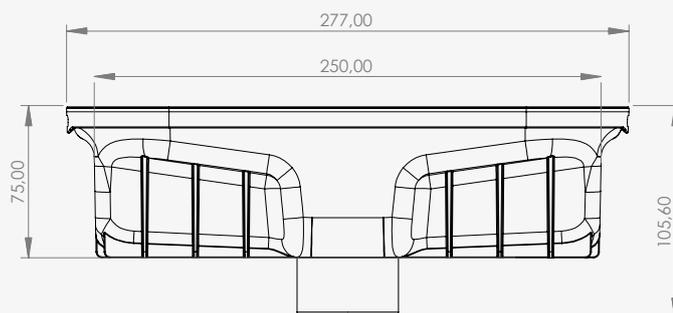


Measurements in mm


## DRAIN RUBER

Drainage capacity:


**< 36 L/min**

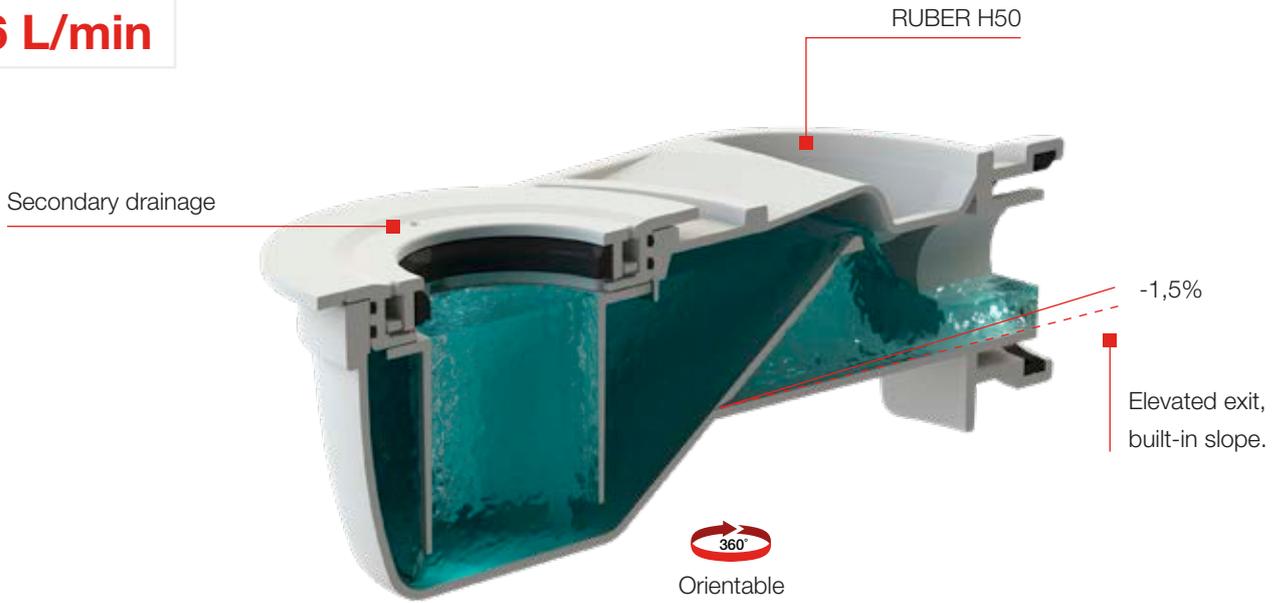

Opción puntual:



Factory-bonded hot-melt membrane

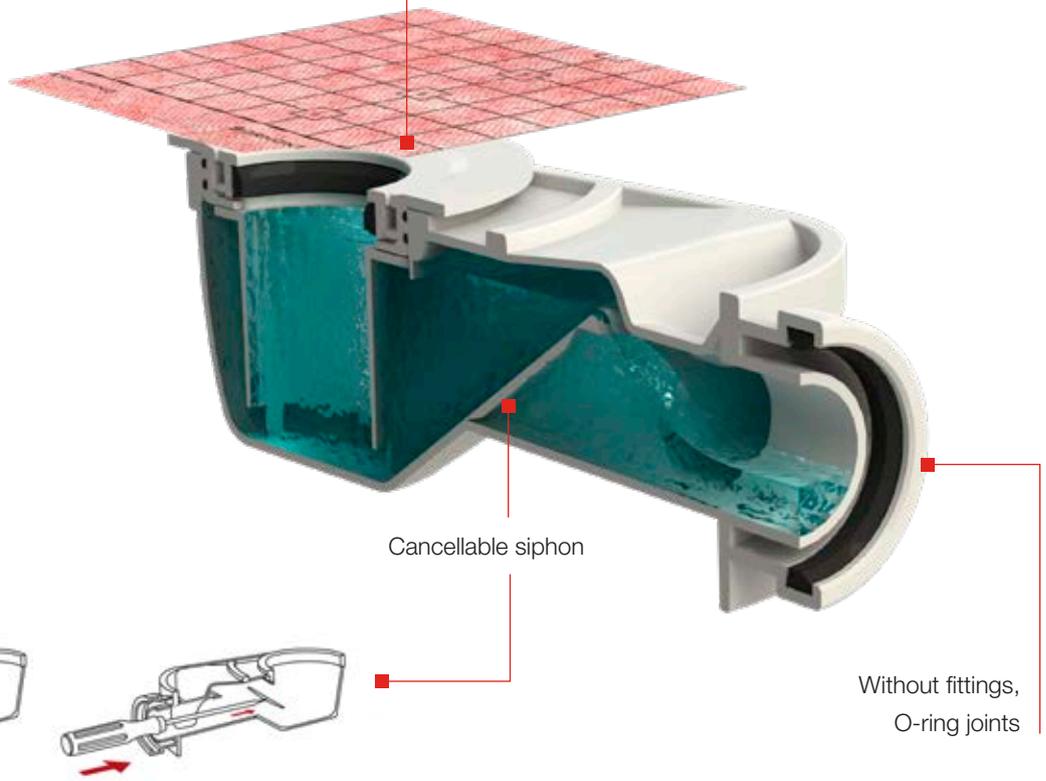

REF.	DESCRIPTION
IG60035	RUBER H50 DRAIN
IG60030	RUBER H28 DRAIN



RUBER H50





RUBER H28


**Two height options:**

**Option 1:** Ruber H50 Drain with siphon of 50 mm height, total height installation with pavement 1 cm included: 90 mm.

- DN/DI 50 mm outlet
- Connection with pressure seal

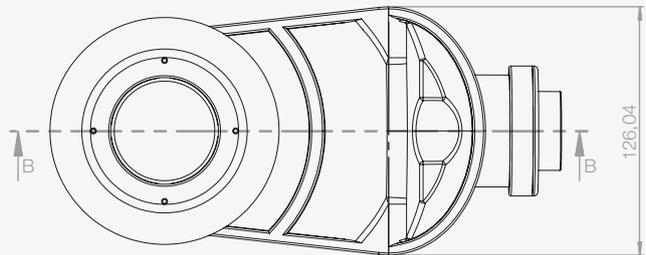



Measurements in mm

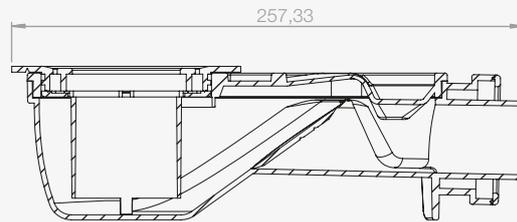


SECTION B-B

**RUBER H28** Drain with siphon of 28 mm height, total height installation with pavement 1 cm included: 70 mm.


- DN/DE 40 mm outlet
- Connection via gluing

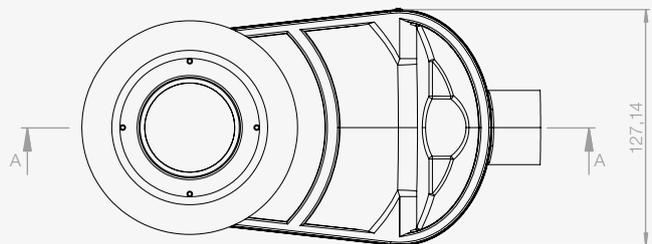


Measurements in mm

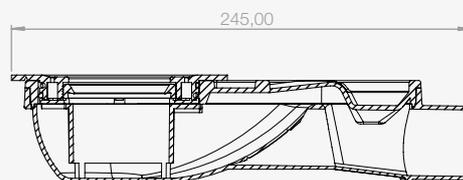

SECTION A-A

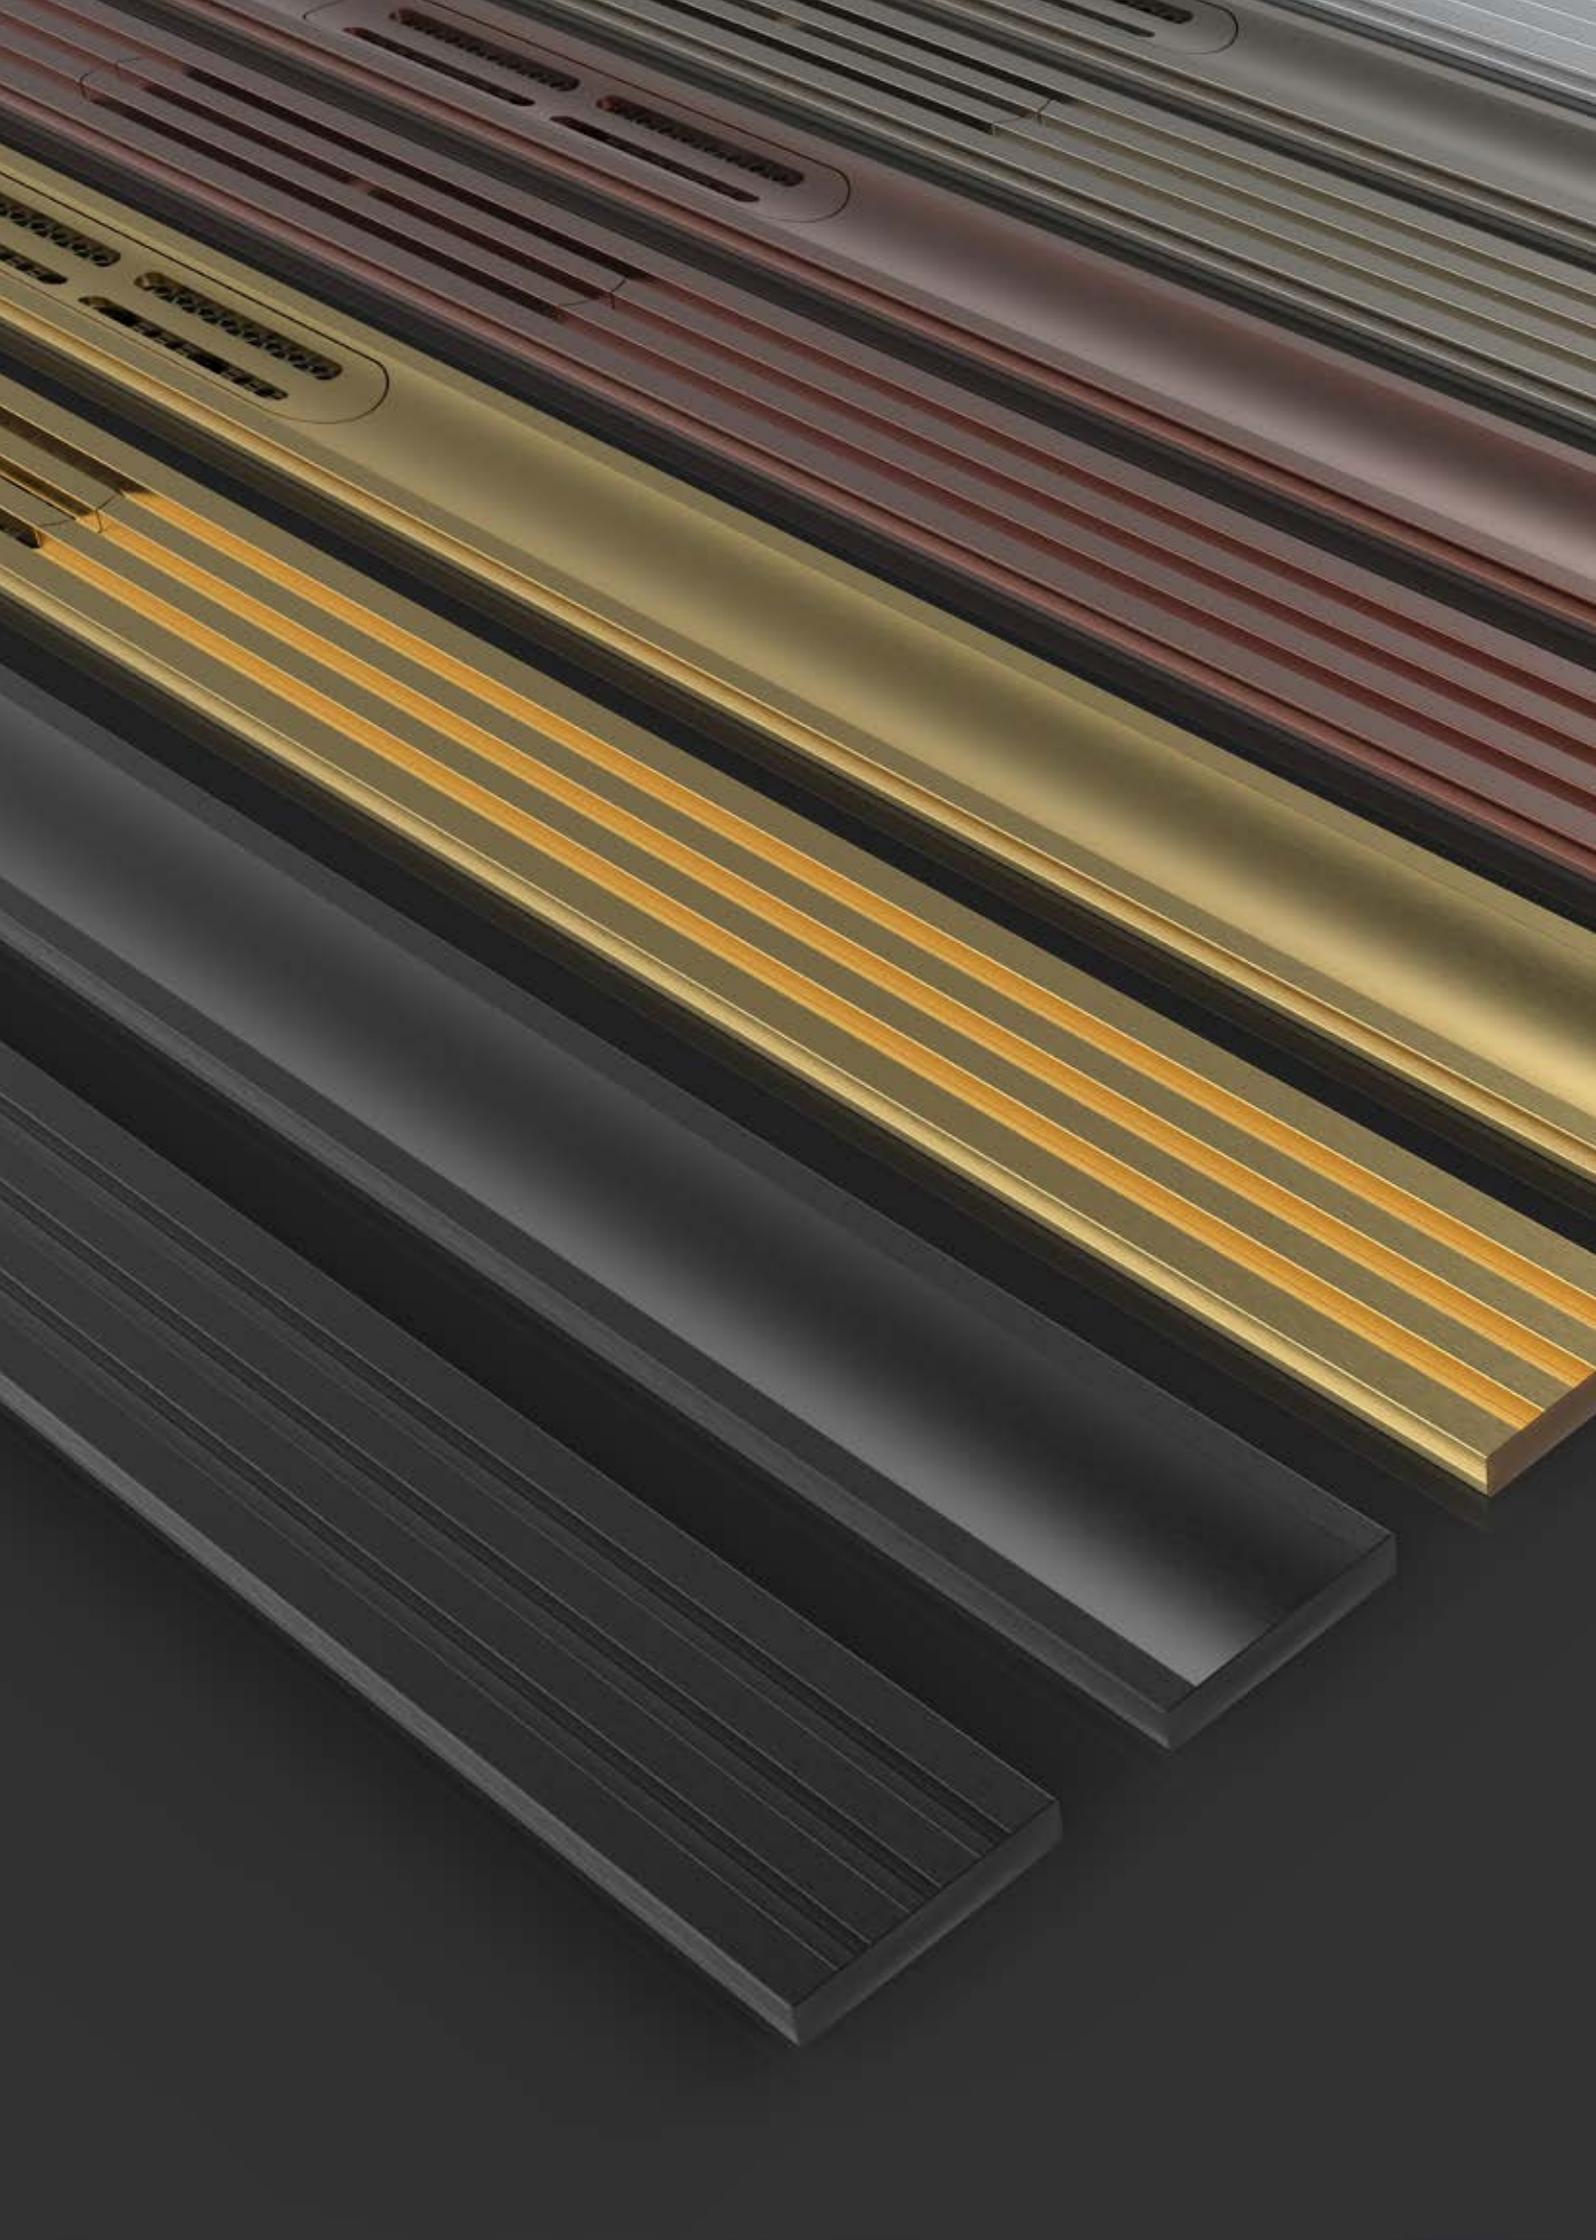

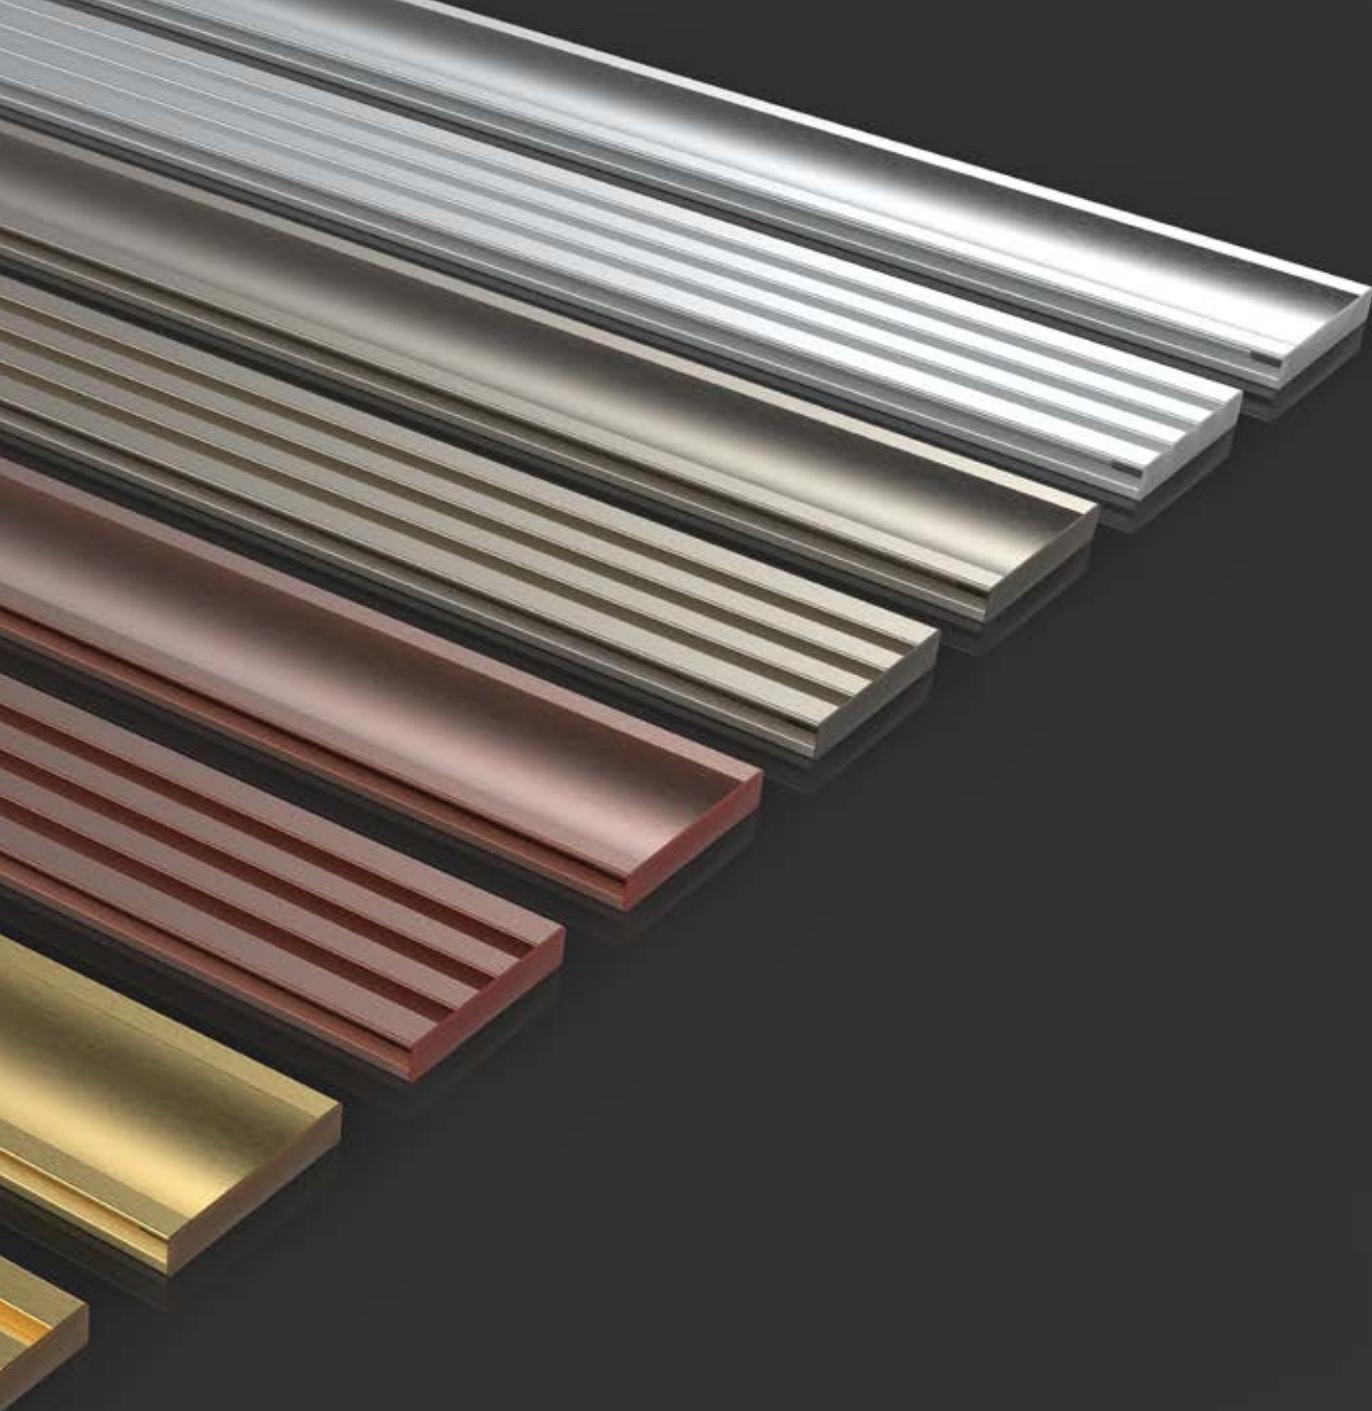


Discover more...

# REVOLUX

New grids **cut-outs**, 2 models, 5 finishes.

COMPLETE SHOWER KIT CUT OUT **REVOLUX KIT**

Measure, cut, and install!

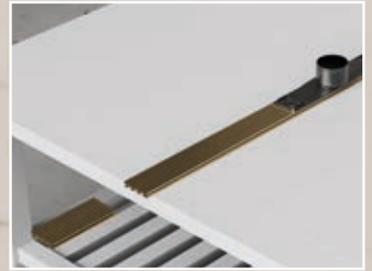

REVOLUX is a **shower system featuring a cut-out grating** that can be tailored to fit any shower size or shape. It is notable for its **dual drainage options** and **high flow rate**, which ensures efficient water management.

It offers **five colours and two designs** to complement the aesthetics of any bathroom. Made from **6063-T6 aluminium**, it ensures both durability and resistance to corrosion.

**Features**

- » Resizable to the necessary measure
- » 2 sizes: 1 and 2 meters in length
- » We offer 2 models with 5 finishes each
- » Removable embellisher
- » Grooved with lower dovetail for better grip on support with C2 adhesive cement
- » Quick installation
- » EN1253 / DIN18534 standard


**Specifications**

- » Cargo class K3
- » Grating height: 7 mm
- » Aerial-grade 6063 aluminum
- » Anodized: 25 microns
- » Vertical adjustment of the grate




Scan the QR code and discover more

**REVOLUX TRYPHON KIT**

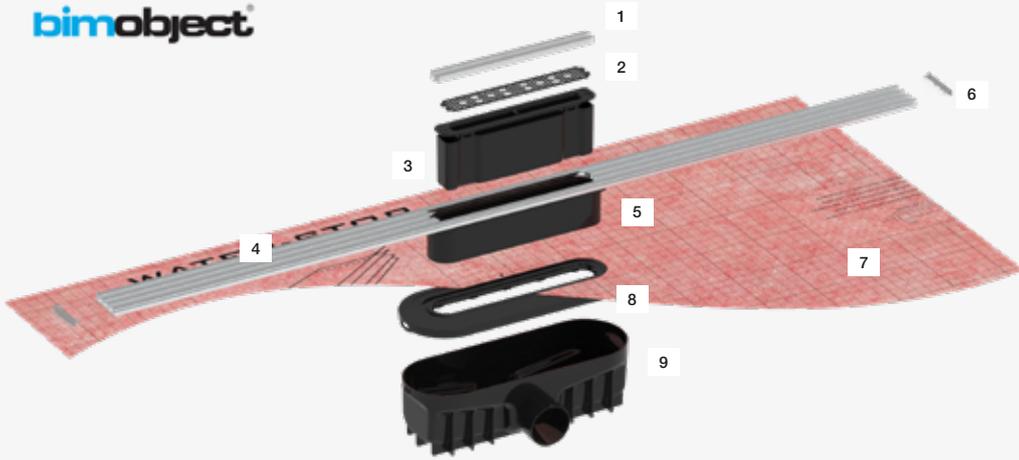

- 1. Trim
- 2. Hair collector
- 3. Siphon
- 4. Revolux grid
- 5. Connection collector
- 6. End cover
- 7. Water-Stop membrane
- 8. Heat-sealed adapter
- 9. Tryphon siphon trap

**REVOLUX RUBER KIT**

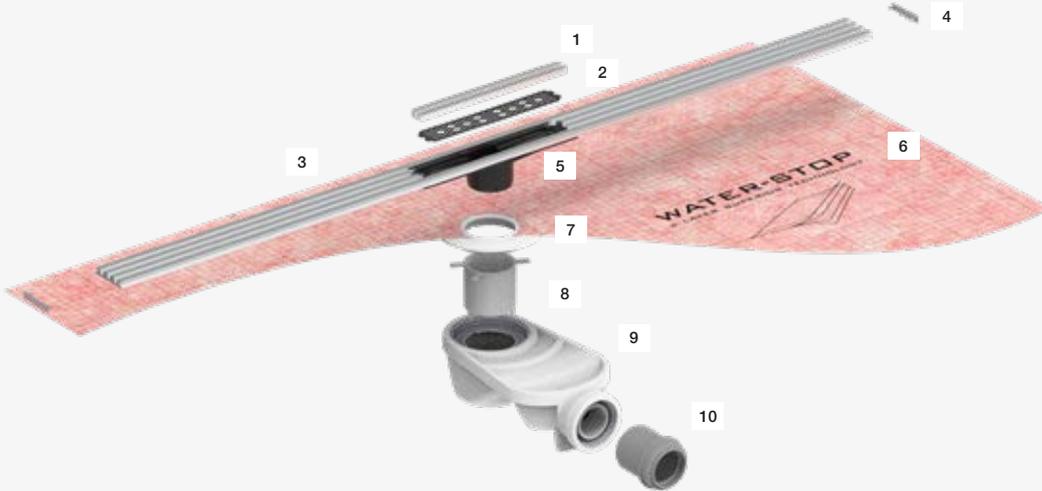

- 1. Trim
- 2. Hair collector
- 3. Revolux grid
- 4. End cover
- 5. Connection collector
- 6. Water-Stop membrane
- 7. Heat-sealed adapter
- 8. Ruber shower head
- 9. Ruber siphonic body
- 10. Reducer Ø50/40

**Revolux Cavity**



- Chrome
- Gold
- Rose
- Black
- Nickel

**Revolux Curve**



## COMPLETE SHOWER KIT CUT OUT **REVOLUX TRYPHON KIT**

### Revolux Tryphon Kit - CURVE (with Tryphon Drain)

PRODUCT									LOGISTICS	
FINISHED	TRYPHON			TRYPHON REDUCED		MODEL	MEASURE (cm)	W-S MEMBRANE (m)	UDS/ BOX 	UDS/ PALLET 
	REF.	FLOW RATE (l/min)		REF.	FLOW RATE (l/min)					
		H.S.*	D.S.*		S.S.*					
	IT23004	32	49	IT23004R	49	CURVE CHROME	100	2 x 2 · 4 m <sup>2</sup>	6	40
	IT63004	32	49	IT63004R	49	CURVE GOLD	100	2 x 2 · 4 m <sup>2</sup>	6	40
	IT83004	32	49	IT83004R	49	CURVE ROSE	100	2 x 2 · 4 m <sup>2</sup>	6	40
	IT53004	32	49	IT53004R	49	CURVE BLACK	100	2 x 2 · 4 m <sup>2</sup>	6	40
	IT93004	32	49	IT93004R	49	CURVE NICKEL	100	2 x 2 · 4 m <sup>2</sup>	6	40
	IT23200	32	49	IT23200R	49	CURVE CHROME	200	2,5 x 2 · 5 m <sup>2</sup>	3	32
	IT63200	32	49	IT63200R	49	CURVE GOLD	200	2,5 x 2 · 5 m <sup>2</sup>	3	32
	IT83200	32	49	IT83200R	49	CURVE ROSE	200	2,5 x 2 · 5 m <sup>2</sup>	3	32
	IT53200	32	49	IT53200R	49	CURVE BLACK	200	2,5 x 2 · 5 m <sup>2</sup>	3	32
	IT93200	32	49	IT93200R	49	CURVE NICKEL	200	2,5 x 2 · 5 m <sup>2</sup>	3	32

\*H.S.: Hydraulic Siphon | D.S.: Dry Siphon

### Revolux Curve



### Revolux Tryphon Kit - CAVITY (with Tryphon Drain)

PRODUCT									LOGISTICS	
FINISHED	TRYPHON			TRYPHON REDUCED		MODEL	MEASURE (cm)	W-S MEMBRANE (m)	UDS/ BOX 	UDS/ PALLET 
	REF.	FLOW RATE (l/min)		REF.	FLOW RATE (l/min)					
		H.S.*	D.S.*		S.S.*					
	IT24004	32	49	IT24004R	49	CAVITY CHROME	100	2 x 2 · 4 m <sup>2</sup>	6	40
	IT64004	32	49	IT64004R	49	CAVITY GOLD	100	2 x 2 · 4 m <sup>2</sup>	6	40
	IT84004	32	49	IT84004R	49	CAVITY ROSE	100	2 x 2 · 4 m <sup>2</sup>	6	40
	IT54004	32	49	IT54004R	49	CAVITY BLACK	100	2 x 2 · 4 m <sup>2</sup>	6	40
	IT94004	32	49	IT94004R	49	CAVITY NICKEL	100	2 x 2 · 4 m <sup>2</sup>	6	40
	IT24200	32	49	IT24200R	49	CAVITY CHROME	200	2,5 x 2 · 5 m <sup>2</sup>	3	32
	IT64200	32	49	IT64200R	49	CAVITY GOLD	200	2,5 x 2 · 5 m <sup>2</sup>	3	32
	IT84200	32	49	IT84200R	49	CAVITY ROSE	200	2,5 x 2 · 5 m <sup>2</sup>	3	32
	IT54200	32	49	IT54200R	49	CAVITY BLACK	200	2,5 x 2 · 5 m <sup>2</sup>	3	32
	IT94200	32	49	IT94200R	49	CAVITY NICKEL	200	2,5 x 2 · 5 m <sup>2</sup>	3	32


\*H.S.: Hydraulic Siphon | D.S.: Dry Siphon

### Revolux Cavity



**COMPLETE SHOWER KIT CUT OUT REVOLUX TRYPHON KIT**

The system includes

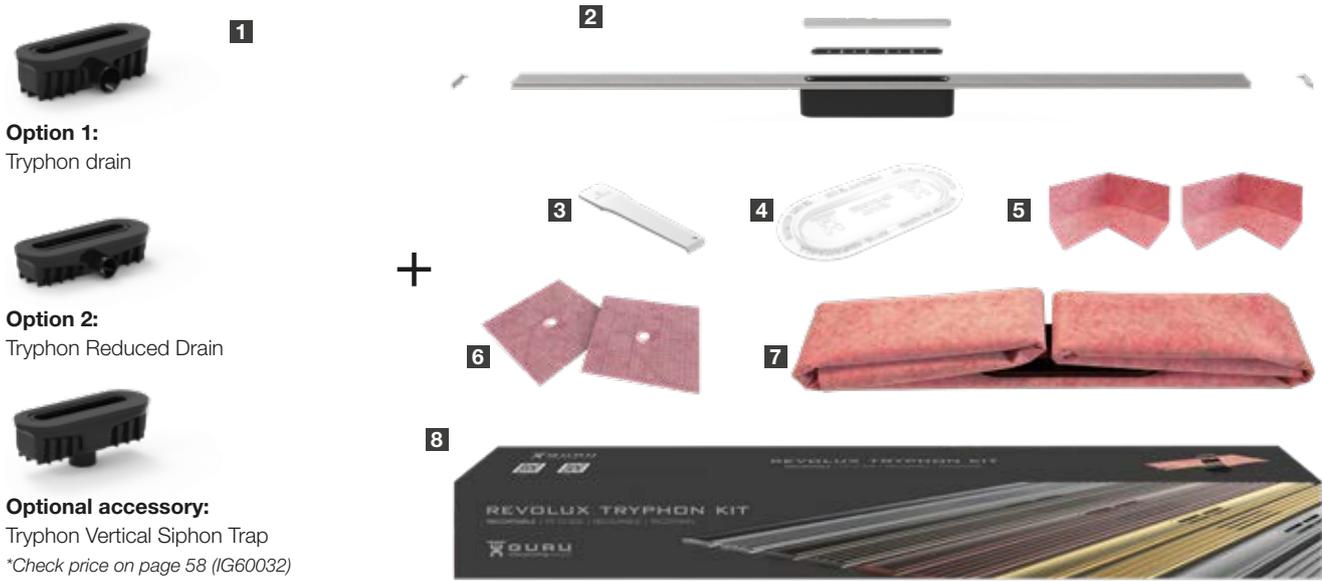

**Option 1:**  
Tryphon drain


**Option 2:**  
Tryphon Reduced Drain

**Optional accessory:**  
Tryphon Vertical Siphon Trap  
*\*Check price on page 58 (IG60032)*

**\*Installation height (including 1 cm thick pavement):**

TRYPHON	TRYPHON REDUCED	TRYPHON VERTICAL
88 mm	70 mm	83 mm

- 1- Drain of choice. 2- Grate, embellisher, and hair trap EVOLUX (model and size of choice). 3- Grate remover. 4- Mortar level cover. 5- W-S DIN x2 (inside corners). 6- W-S TUB x2 (pass-through pipes). 7- WATER-STOP membrane with thermosealed adapter (2 x 2 o 2,5 x 2 m).
- 8- Evolux Tryphon Kit box.

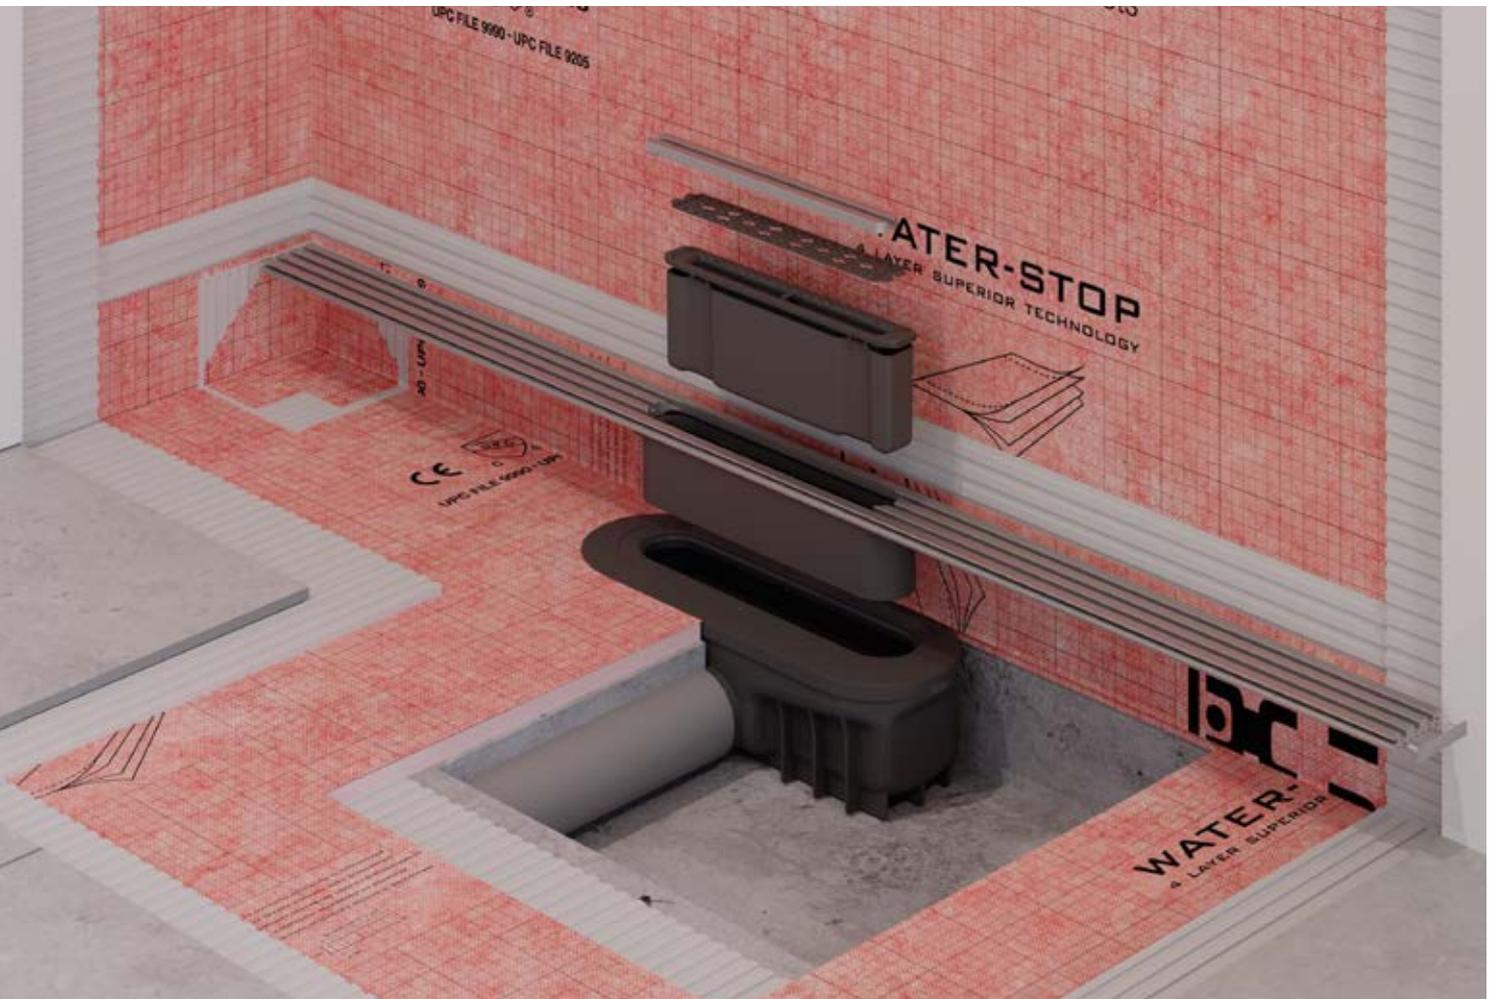

## COMPLETE SHOWER KIT CUT OUT **REVOLUX RUBER KIT**

### Revolux Ruber Kit - CURVE (with Ruber Drain)

FINISHED	PRODUCT						LOGISTICS	
	REF. RUBER H50	REF. RUBER H28	FLOW RATE (l/m)	MODEL	MEASURE (cm)	W-S MEMBRANE (m)	UDS/ BOX	UDS/ PALLET
	IE23004	IE23004R	28	CURVE CHROME	100	2 x 2 · 4 m <sup>2</sup>	 6	 40
	IE63004	IE63004R	28	CURVE GOLD	100	2 x 2 · 4 m <sup>2</sup>	6	40
	IE83004	IE83004R	28	CURVE ROSE	100	2 x 2 · 4 m <sup>2</sup>	6	40
	IE53004	IE53004R	28	CURVE BLACK	100	2 x 2 · 4 m <sup>2</sup>	6	40
	IE93004	IE93004R	28	CURVE NICKEL	100	2 x 2 · 4 m <sup>2</sup>	6	40
	IE23200	IE23200R	28	CURVE CHROME	200	2,5 x 2 · 5 m <sup>2</sup>	3	32
	IE63200	IE63200R	28	CURVE GOLD	200	2,5 x 2 · 5 m <sup>2</sup>	3	32
	IE83200	IE83200R	28	CURVE ROSE	200	2,5 x 2 · 5 m <sup>2</sup>	3	32
	IE53200	IE53200R	28	CURVE BLACK	200	2,5 x 2 · 5 m <sup>2</sup>	3	32
	IE93200	IE93200R	28	CURVE NICKEL	200	2,5 x 2 · 5 m <sup>2</sup>	3	32

### Revolux Curve



### Revolux Ruber Kit - CAVITY (with Ruber Drain)

FINISHED	PRODUCT						LOGISTICS	
	REF. RUBER H50	REF. RUBER H28	FLOW RATE (l/m)	MODEL	MEASURE (cm)	W-S MEMBRANE (m)	UDS/ BOX	UDS/ PALLET
	IE24004	IE24004R	29	CAVITY CHROME	100	2 x 2 · 4 m <sup>2</sup>	 6	 40
	IE64004	IE64004R	29	CAVITY GOLD	100	2 x 2 · 4 m <sup>2</sup>	6	40
	IE84004	IE84004R	29	CAVITY ROSE	100	2 x 2 · 4 m <sup>2</sup>	6	40
	IE54004	IE54004R	29	CAVITY BLACK	100	2 x 2 · 4 m <sup>2</sup>	6	40
	IE94004	IE94004R	29	CAVITY NICKEL	100	2 x 2 · 4 m <sup>2</sup>	6	40
	IE24200	IE24200R	29	CAVITY CHROME	200	2,5 x 2 · 5 m <sup>2</sup>	3	32
	IE64200	IE64200R	29	CAVITY GOLD	200	2,5 x 2 · 5 m <sup>2</sup>	3	32
	IE84200	IE84200R	29	CAVITY ROSE	200	2,5 x 2 · 5 m <sup>2</sup>	3	32
	IE54200	IE54200R	29	CAVITY BLACK	200	2,5 x 2 · 5 m <sup>2</sup>	3	32
	IE94200	IE94200R	29	CAVITY NICKEL	200	2,5 x 2 · 5 m <sup>2</sup>	3	32

### Revolux Cavity



**COMPLETE SHOWER KIT CUT OUT REVOLUX RUBER KIT**

The system includes



1

Option 1: Ruber H50 Drain

+



2



3



4



5



Option 2: Ruber Drain Reduced



6



7



8

\*Installation height (including 1 cm thick pavement):

RUBER	RUBER REDUCED
	
93 mm	73 mm

- 1- Drain of choice. 2- Grate, embellisher, and hair trap REVOLUX (model and size of choice).
- 3- Grate remover. 4- Mortar level cover. 5- W-S DIN x2 (inside corners). 6- W-S TUB x2 (pass-through pipes). 7- WATER-STOP membrane with thermosealed adapter (2 x 2 o 2,5 x 2 m).
- 8- Evolux Ruber Kit box.







Integra

Microcemento

Dark

Gold

Plus



Discover more...

# EVOLUX

Shower or art?

## COMPLETE SHOWER KIT **EVOLUX KIT**

**Maximum efficiency, enhanced elegance**



Evolux shower system provides a comprehensive solution for draining and waterproofing masonry shower trays. This set includes a stainless-steel gutter and grating, a low-profile siphonic drain, and a WATER-STOP waterproof membrane factory-bonded and sealed to a special adapter for connection to the drain.

### Features

- » Infinite designs
- » Stainless steel structure
- » Resistance to high loads
- » Waterproofing included
- » High drainage capacity
- » Easy installation
- » Effective cleaning
- » 10-year warranty


### Specifications

- » Stainless steel
- » PVD and textured finishes




Scan the QR code and discover more

**EVOLUX TRYPHON KIT**

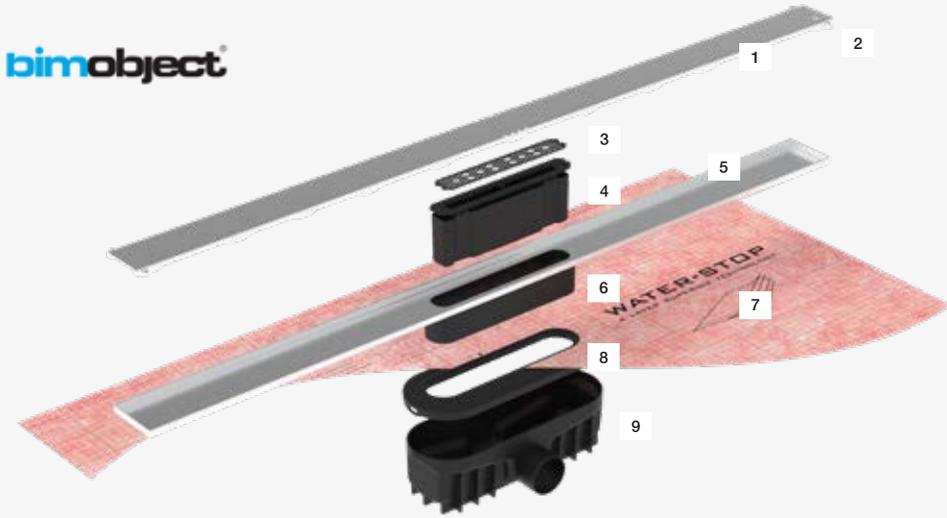

- 1. Evolux grate
- 2. Rubber stoppers
- 3. Hair collector
- 4. Siphon
- 5. Evolux gutter
- 6. Connection collector
- 7. Water-Stop membrane 2 x 2 m
- 8. Heat-sealed adapter
- 9. Tryphon siphon trap

**EVOLUX RUBER KIT**

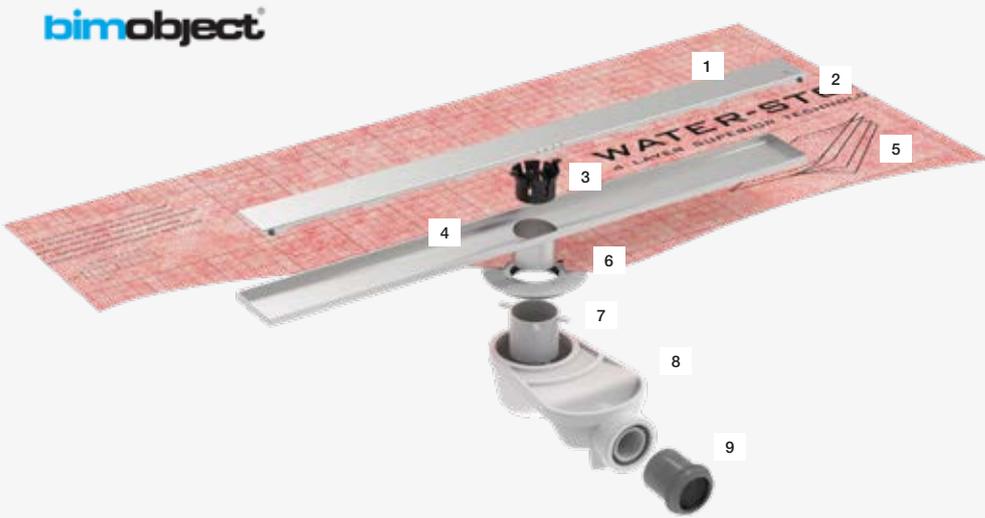

- 1. Evolux grate
- 2. Rubber stoppers
- 3. Hair collector
- 4. Evolux gutter
- 5. Water-Stop membrane 2 x 2 m
- 6. Heat-sealed adapter
- 7. Ruber shower head
- 8. Ruber siphonic body
- 9. Reducer Ø50/40 mm

**Evolux Lisa**



**Evolux Lisa Gold**



**Evolux Lisa Antivandálica**



**Evolux Integra (Tryphon)**



**Evolux Plus**



**Evolux Lisa Dark**



**Evolux Microcemento**



**Evolux Integra (Ruber)**



# COMPLETE SHOWER KIT **EVOLUX TRYPHON KIT - LISA**

Evolux Tryphon Kit (with Tryphon Drain)

## Evolux Lisa



FINISHED	PRODUCT							LOGISTICS		
	TRYPHON			TRYPHON REDUCED		MODEL	MEASURE (cm)	W-S MEMBRANE (m)	UDS/ BOX	UDS/ PALLET
	REF.	FLOW RATE (l/m)		REF.	FLOW RATE (l/m)					
	H.S.*	D.S.*		S.S.*						
	IT41040	33	47	IT41040R	47	LISA	40	2 x 2 · 4 m <sup>2</sup>	6	40
	IT41050	33	47	IT41050R	47	LISA	50	2 x 2 · 4 m <sup>2</sup>	6	40
	IT41000	33	47	IT41000R	47	LISA	60	2 x 2 · 4 m <sup>2</sup>	6	40
	IT41001	33	47	IT41001R	47	LISA	70	2 x 2 · 4 m <sup>2</sup>	6	40
	IT41002	33	47	IT41002R	47	LISA	80	2 x 2 · 4 m <sup>2</sup>	6	40
	IT41003	33	47	IT41003R	47	LISA	90	2 x 2 · 4 m <sup>2</sup>	6	40
	IT41004	33	47	IT41004R	47	LISA	100	2 x 2 · 4 m <sup>2</sup>	6	40
	IT41005	33	47	IT41005R	47	LISA	120	2 x 2 · 4 m <sup>2</sup>	3	32
	IT41150	33	47	IT41150R	47	LISA	150	2 x 2 · 4 m <sup>2</sup>	3	32
	IT41180	33	47	IT41180R	47	LISA	180	2 x 2 · 4 m <sup>2</sup>	3	32

\* H.S.: Hydraulic Siphon | D.S.: Dry Siphon

### The system includes



**Option 1:** Tryphon Drain

**Option 2:** Tryphon Reduced Drain

**Optional accessory:**  
Tryphon Vertical Siphon Trap  
\*Check price on page. 58 (IG60032)

\*Installation height (including 1 cm thick pavement):

TRYPHON	TRYPHON REDUCED	TRYPHON VERTICAL
93 mm	74 mm	88 mm

1- Drain of choice. 2- Grate and channel EVOLUX LISA (size of choice) and hair collector. 3- Grate remover. 4- Mortar level cover. 5- W-S DIN x2 (inside corners). 6- W-S TUB x2 (pass-through pipes). 7- WATER-STOP membrane with thermosealed adapter (2 x 2 m). 8- Evolux Tryphon Kit box.

# COMPLETE SHOWER KIT **EVOLUX TRYPHON KIT - PLUS**

Evolux Tryphon Kit (with Tryphon Drain)

Evolux Plus



FINISHED	PRODUCT							LOGISTICS		
	TRYPHON			TRYPHON REDUCED		MODEL	MEASURE (cm)	W-S MEMBRANE (m)	UDS/ BOX	UDS/ PALLET
	REF.	FLOW RATE (l/m)		REF.	FLOW RATE (l/m)					
	H.S.*	D.S.*		S.S.*						
	IT42000	34	49	IT42000R	49	PLUS	60	2 x 2 · 4 m <sup>2</sup>	6	40
	IT42001	34	49	IT42001R	49	PLUS	70	2 x 2 · 4 m <sup>2</sup>	6	40
	IT42002	34	49	IT42002R	49	PLUS	80	2 x 2 · 4 m <sup>2</sup>	6	40
	IT42003	34	49	IT42003R	49	PLUS	90	2 x 2 · 4 m <sup>2</sup>	6	40
	IT42004	34	49	IT42004R	49	PLUS	100	2 x 2 · 4 m <sup>2</sup>	6	40
	IT42005	34	49	IT42005R	49	PLUS	120	2 x 2 · 4 m <sup>2</sup>	3	32
	IT42150	34	49	IT42150R	49	PLUS	150	2 x 2 · 4 m <sup>2</sup>	3	32
	IT42180	34	49	IT42180R	49	PLUS	180	2 x 2 · 4 m <sup>2</sup>	3	32

\* H.S.: Hydraulic Siphon | D.S.: Dry Siphon

## The system includes



1

Option 1: Tryphon Drain




Option 2: Tryphon Reduced Drain



Optional accessory:  
Tryphon Vertical Siphon Trap  
\*Check price on page. 58 (IG60032)

2



3



4



5



6



7



8



\*Installation height (including 1 cm thick pavement):

TRYPHON	TRYPHON REDUCED	TRYPHON VERTICAL
93 mm	74 mm	88 mm

1-Drain of choice. 2- Grate and channel EVOLUX PLUS (size of choice)and hair collector. 3- Grate remover. 4- Mortar level cover. 5- W-S DIN x2 (inside corners). 6- W-S TUB x2 (pass-through pipes). 7- WATER-STOP membrane with thermosealed adapter (2 x 2 m). 8- Evolux Tryphon Kit box.

**NEW!**

**COMPLETE SHOWER KIT EVOLUX TRYPHON KIT - ANTIVANDAL**

Evolux Tryphon Kit (with Tryphon Drain)

Evolux Lisa Antivandal



FINISHED	PRODUCT								LOGISTICS		
	TRYPHON			TRYPHON REDUCED			MODEL	MEASURE (cm)	W-S MEMBRANE (m)	UDS/ BOX	UDS/ PALLET
	REF.	FLOW RATE (l/m)		REF.	FLOW RATE (l/m)						
	H.S.*	D.S.*		S.S.*							
	IT41701	33	47	IT41701R	47	LISA ANTIVAND.	70	2 x 2 · 4 m <sup>2</sup>	6	40	
	IT41702	33	47	IT41702R	47	LISA ANTIVAND.	80	2 x 2 · 4 m <sup>2</sup>	6	40	
	IT41703	33	47	IT41703R	47	LISA ANTIVAND.	90	2 x 2 · 4 m <sup>2</sup>	6	40	

\* H.S.: Hydraulic Siphon | D.S.: Dry Siphon

**The system includes**

**Option 1:** Tryphon Drain

**Option 2:** Tryphon Reduced Drain

**Optional accessory:**  
Tryphon Vertical Siphon Trap  
\*Check price on page. 58 (IG60032)

\*Installation height (including 1 cm thick pavement):

TRYPHON	TRYPHON REDUCED	TRYPHON VERTICAL
93 mm	74 mm	88 mm

1- Drain of choice. 2- Grate and channel EVOLUX LISA ANTIVANDAL (size of choice) and hair collector. 3- Grate remover. 4- Mortar level cover. 5- W-S DIN x2 (inside corners). 6- W-S TUB x2 (pass-through pipes). 7- WATER-STOP membrane with thermosealed adapter (2 x 2 m). 8- Evolux Tryphon Kit box.

# COMPLETE SHOWER KIT **EVOLUX TRYPHON KIT - LISA GOLD**

Evolux Tryphon Kit (with Tryphon Drain)

Evolux Lisa Gold



FINISHED	PRODUCT								LOGISTICS		
	TRYPHON			TRYPHON REDUCED			MODEL	MEASURE (cm)	W-S MEMBRANE (m)	UDS/ BOX	UDS/ PALLET
	REF.	FLOW RATE (l/m)		REF.	FLOW RATE (l/m)						
	H.S.*	D.S.*		S.S.*							
	IT61000	33	47	IT61000R	47	LISA GOLD	60	2 x 2 · 4 m <sup>2</sup>	6	40	
	IT61001	33	47	IT61001R	47	LISA GOLD	70	2 x 2 · 4 m <sup>2</sup>	6	40	
	IT61002	33	47	IT61002R	47	LISA GOLD	80	2 x 2 · 4 m <sup>2</sup>	6	40	
	IT61003	33	47	IT61003R	47	LISA GOLD	90	2 x 2 · 4 m <sup>2</sup>	6	40	
	IT61004	33	47	IT61004R	47	LISA GOLD	100	2 x 2 · 4 m <sup>2</sup>	6	40	
	IT61005	33	47	IT61005R	47	LISA GOLD	120	2 x 2 · 4 m <sup>2</sup>	3	32	
	IT61150	33	47	IT61150R	47	LISA GOLD	150	2 x 2 · 4 m <sup>2</sup>	3	32	
	IT61180	33	47	IT61180R	47	LISA GOLD	180	2 x 2 · 4 m <sup>2</sup>	3	32	

\* H.S.: Hydraulic Siphon | D.S.: Dry Siphon

## The system includes



**Option 1:** Tryphon Drain

**Option 2:** Tryphon Reduced Drain

**Optional accessory:**  
Tryphon Vertical Siphon Trap  
\*Check price on page. 58 (IG60032)

\*Installation height (including 1 cm thick pavement):


TRYPHON	TRYPHON REDUCED	TRYPHON VERTICAL
93 mm	74 mm	88 mm

**1-** Drain of choice. **2-** Grate and channel EVOLUX LISA GOLD (size of choice) and hair collector. **3-** Grate remover. **4-** Mortar level cover. **5-** W-S DIN x2 (inside corners). **6-** W-S TUB x2 (pass-through pipes). **7-** WATER-STOP membrane with thermosealed adapter (2 x 2 m). **8-** Evolux Tryphon Kit box.

# COMPLETE SHOWER KIT **EVOLUX TRYPHON KIT - LISA DARK**

Evolux Tryphon Kit (with Tryphon Drain)

## Evolux Lisa Dark

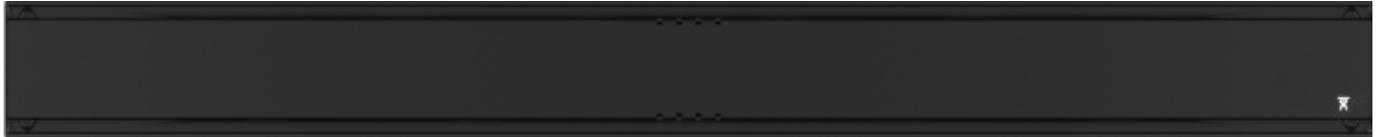

FINISHED	PRODUCT								LOGISTICS		
	TRYPHON			TRYPHON REDUCED			MODEL	MEASURE (cm)	W-S MEMBRANE (m)	UDS/ BOX	UDS/ PALLET
	REF.	FLOW RATE (l/m)		REF.	FLOW RATE (l/m)						
		H.S.*	D.S.*		S.S.*						
●	IT51000	33	47	IT51000R	47	LISA DARK	60	2 x 2 · 4 m <sup>2</sup>	6	40	
●	IT51001	33	47	IT51001R	47	LISA DARK	70	2 x 2 · 4 m <sup>2</sup>	6	40	
●	IT51002	33	47	IT51002R	47	LISA DARK	80	2 x 2 · 4 m <sup>2</sup>	6	40	
●	IT51003	33	47	IT51003R	47	LISA DARK	90	2 x 2 · 4 m <sup>2</sup>	6	40	
●	IT51004	33	47	IT51004R	47	LISA DARK	100	2 x 2 · 4 m <sup>2</sup>	6	40	
●	IT51005	33	47	IT51005R	47	LISA DARK	120	2 x 2 · 4 m <sup>2</sup>	3	32	
●	IT51150	33	47	IT51150R	47	LISA DARK	150	2 x 2 · 4 m <sup>2</sup>	3	32	
●	IT51180	33	47	IT51180R	47	LISA DARK	180	2 x 2 · 4 m <sup>2</sup>	3	32	

\* H.S.: Hydraulic Siphon | D.S.: Dry Siphon

### The system includes



**Option 1:** Tryphon Drain

**Option 2:** Tryphon Reduced Drain

**Optional accessory:**  
Tryphon Vertical Siphon Trap  
\*Check price on page. 58 (IG60032)

\*Installation height (including 1 cm thick pavement):

TRYPHON	TRYPHON REDUCED	TRYPHON VERTICAL
93 mm	74 mm	88 mm

**1-** Drain of choice. **2-** Grate and channel EVOLUX LISA DARK (size of choice) and hair collector. **3-** Grate remover. **4-** Mortar level cover. **5-** W-S DIN x2 (inside corners). **6-** W-S TUB x2 (pass-through pipes). **7-** WATER-STOP membrane with thermosealed adapter (2 x 2 m). **8-** Evolux Tryphon Kit box.

# COMPLETE SHOWER KIT EVOLUX TRYPHON KIT - MICROCEMENT

Evolux Tryphon Kit (with Tryphon Drain)

Evolux Microcement



FINISHED	PRODUCT							LOGISTICS		
	TRYPHON			TRYPHON REDUCED		MODEL	MEASURE (cm)	W-S MEMBRANE (m)	UDS/ BOX	UDS/ PALLET
	REF.	FLOW RATE (l/m)		REF.	FLOW RATE (l/m)					
		H.S.	D.S.*		S.S.*					
	IT47000	30	46	IT47000R	46	MICROCEMENT	60	2 x 2 · 4 m <sup>2</sup>	6	40
	IT47001	30	46	IT47001R	46	MICROCEMENT	70	2 x 2 · 4 m <sup>2</sup>	6	40
	IT47002	30	46	IT47002R	46	MICROCEMENT	80	2 x 2 · 4 m <sup>2</sup>	6	40
	IT47003	30	46	IT47003R	46	MICROCEMENT	90	2 x 2 · 4 m <sup>2</sup>	6	40
	IT47004	30	46	IT47004R	46	MICROCEMENT	100	2 x 2 · 4 m <sup>2</sup>	6	40
	IT47005	30	46	IT47005R	46	MICROCEMENT	120	2 x 2 · 4 m <sup>2</sup>	3	32

\* H.S.: Hydraulic Siphon | D.S.: Dry Siphon

## The system includes



**Option 1:**  
Tryphon Drain

**Option 2:**  
Tryphon Reduced Drain

**Optional accessory:**  
Tryphon Vertical Siphon Trap  
\*Check price on page. 58 (IG60032)

\*Installation height (including 1 cm thick pavement):

TRYPHON	TRYPHON REDUCED	TRYPHON VERTICAL
93 mm	74 mm	88 mm


1- Drain of choice. 2- Grate and channel EVOLUX MICROCEMENT(size of choice) and hair collector. 3- Installation template 4- Grate remover. 5- Mortar level cover. 6- W-S DIN x2 (inside corners). 7- W-S TUB x2 (pass-through pipes). 8- WATER-STOP membrane with thermosealed adapter (2 x 2 m). 9- Evolux Tryphon Kit box.

## COMPLETE SHOWER KIT **EVOLUX TRYPHON KIT INTEGRA**

### Pavementable design, now more reinforced

The **new reinforced model** is specifically designed for precise and secure applications of large ceramic pieces, as its **dovetail system** ensures optimal grip.

Its **reinforced aluminum** construction combines strength and lightness, ensuring greater durability and stability during installation. Meanwhile, its elegant and aesthetic finish enhances the beauty of the ceramics.

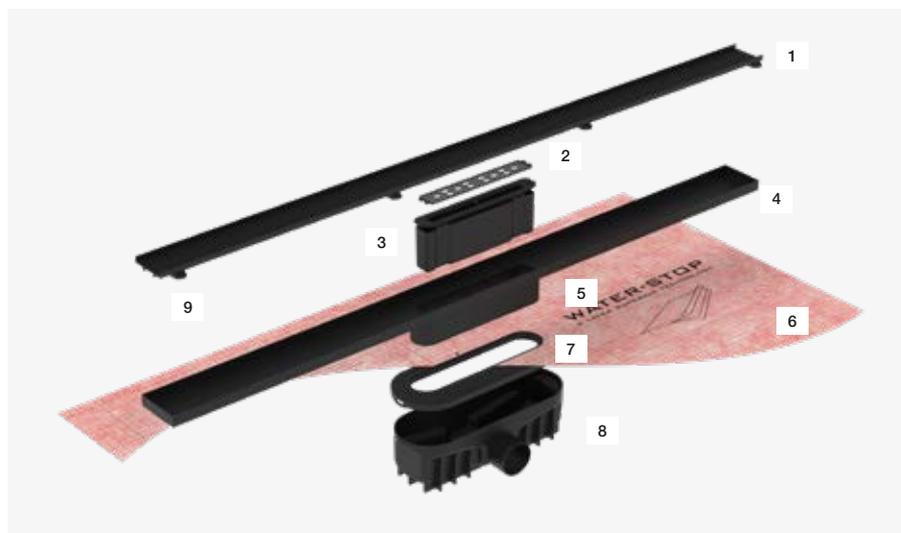

1. Evolux Integra grate
2. Hair collector
3. Siphon
4. Evolux Integra Force gutter
5. Conexion collector
6. Water-Stop membrane 2 x 2 m
7. Heat-sealed adapter
8. Tryphon Siphon Trap
9. Rubber stoppers

#### Features

- » Reinforced structure
- » Maximum strength with minimal weight
- » Included waterproofing
- » High drainage capacity
- » Easy installation
- » Effective cleaning
- » 10-year warranty

#### Specifications

- » Textured stainless steel channel
- » Aluminum grate with textured paint
- » Slots with dovetail to maximize adhesive grip
- » Self-centering grate using centering feet

# COMPLETE SHOWER KIT **EVOLUX TRYPHON KIT INTEGRA**

Evolux Tryphon Kit (with Tryphon Drain)

FINISHED	PRODUCT							LOGISTICS		
	TRYPHON			TRYPHON REDUCED		MODEL	MEASURE (cm)	W-S MEMBRANE (m)	UDS/ BOX 	UDS/ PALLET 
	REF.	FLOW RATE (l/m)		REF.	FLOW RATE (l/m)					
		H.S.*	D.S.*		S.S.*					
-	IT45040	32	47	IT45040R	47	INTEGRA	40	2 x 2 · 4 m <sup>2</sup>	6	40
-	IT45050	32	47	IT45050R	47	INTEGRA	50	2 x 2 · 4 m <sup>2</sup>	6	40
-	IT45000	32	47	IT45000R	47	INTEGRA	60	2 x 2 · 4 m <sup>2</sup>	6	40
-	IT45001	32	47	IT45001R	47	INTEGRA	70	2 x 2 · 4 m <sup>2</sup>	6	40
-	IT45002	32	47	IT45002R	47	INTEGRA	80	2 x 2 · 4 m <sup>2</sup>	6	40
-	IT45003	32	47	IT45003R	47	INTEGRA	90	2 x 2 · 4 m <sup>2</sup>	6	40
-	IT45004	32	47	IT45004R	47	INTEGRA	100	2 x 2 · 4 m <sup>2</sup>	6	40
-	IT45005	32	47	IT45005R	47	INTEGRA	120	2 x 2 · 4 m <sup>2</sup>	3	32
-	IT45150	32	47	IT45150R	47	INTEGRA	150	2 x 2 · 4 m <sup>2</sup>	3	32
-	IT45180	32	47	IT45180R	47	INTEGRA	180	2 x 2 · 4 m <sup>2</sup>	3	32

\* H.S.: Hydraulic Siphon | D.S.: Dry Siphon

Evolux Integra - Paved



The system includes





**Option 1:** Tryphon Drain

**Option 2:** Tryphon Reduced Drain

**Optional accessory:**  
Tryphon Vertical Siphon Trap  
\*Check price on page. 58 (IG60032)

\*Installation height:

TRYPHON	TRYPHON REDUCED	TRYPHON VERTICAL
		
93 mm + PAVEMENT	74 mm + PAVEMENT	88 mm + PAVEMENT

1- Drain of choice. 2- Grate and channel EVOLUX INTEGRA TRYPHON (size of choice) and hair collector. 3- Installation template 4- Grate remover. 5- Mortar level cover. 6- W-S DIN x2 (inside corners). 7- W-S TUB x2 (pass-through pipes). 8- WATER-STOP membrane with thermosealed adapter (2 x 2 m). 9- Evolux Tryphon Kit box.

## COMPLETE SHOWER KIT **EVOLUX RUBER KIT - LISA**

Evolux Ruber Kit (with Ruber Drain)

### Evolux Lisa



FINISHED	PRODUCT						LOGISTICS	
	REF. RUBER H50	REF. RUBER H28	FLOW RATE (l/m)	MODEL	MEASURE (cm)	W-S MEMBRANE (m)	UDS/BOX	UDS/PALLET
	IE41040	IE41040R	27	LISA	40	2 x 2 · 4 m <sup>2</sup>	6	40
	IE41050	IE41050R	27	LISA	50	2 x 2 · 4 m <sup>2</sup>	6	40
	IE41000	IE41000R	27	LISA	60	2 x 2 · 4 m <sup>2</sup>	6	40
	IE41001	IE41001R	27	LISA	70	2 x 2 · 4 m <sup>2</sup>	6	40
	IE41002	IE41002R	27	LISA	80	2 x 2 · 4 m <sup>2</sup>	6	40
	IE41003	IE41003R	27	LISA	90	2 x 2 · 4 m <sup>2</sup>	6	40
	IE41004	IE41004R	27	LISA	100	2 x 2 · 4 m <sup>2</sup>	6	40
	IE41005	IE41005R	27	LISA	120	2 x 2 · 4 m <sup>2</sup>	3	32
	IE41150	IE41150R	27	LISA	150	2 x 2 · 4 m <sup>2</sup>	3	32
	IE41180	IE41180R	27	LISA	180	2 x 2 · 4 m <sup>2</sup>	3	32

### The system includes



*\*Installation height (including 1 cm thick pavement):*

RUBER H50	RUBER H28
93 mm	73 mm

- 1- Drain of choice. 2- Grate and channel EVOLUX LISA (size of choice) and hair collector. 3- Grate remover. 4- Mortar level cover. 5- W-S DIN x2 (inside corners). 6- W-S TUB x2 (pass-through pipes). 7- WATER-STOP membrane with thermosealed adapter (2 x 2 m). 8- Evolux Tryphon Kit box.

# COMPLETE SHOWER KIT **EVOLUX RUBER KIT - PLUS**

Evolux Ruber Kit (with Ruber Drain)

Evolux Plus



FINISHED	PRODUCT						LOGISTICS	
	REF. RUBER H50	REF. RUBER H28	FLOW RATE (l/m)	MODEL	MEASURE (cm)	W-S MEMBRANE (m)	UDS/BOX	UDS/PALLET
●	IE42000	IE42000R	28	PLUS	60	2 x 2 · 4 m <sup>2</sup>	6	40
●	IE42001	IE42001R	28	PLUS	70	2 x 2 · 4 m <sup>2</sup>	6	40
●	IE42002	IE42002R	28	PLUS	80	2 x 2 · 4 m <sup>2</sup>	6	40
●	IE42003	IE42003R	28	PLUS	90	2 x 2 · 4 m <sup>2</sup>	6	40
●	IE42004	IE42004R	28	PLUS	100	2 x 2 · 4 m <sup>2</sup>	6	40
●	IE42005	IE42005R	28	PLUS	120	2 x 2 · 4 m <sup>2</sup>	3	32
●	IE42150	IE42150R	28	PLUS	150	2 x 2 · 4 m <sup>2</sup>	3	32
●	IE42180	IE42180R	28	PLUS	180	2 x 2 · 4 m <sup>2</sup>	3	32

## The system includes



Option 1: Ruber H50 Drain



Option 2: Ruber H28 Drain

+



2

3



4



5



6



7



8



**\*Installation height (including 1 cm thick pavement):**

RUBER H50	RUBER H28
93 mm	73 mm

1- Drain of choice. 2- Grate and channel EVOLUX PLUS (size of choice) and hair collector. 3- Grate remover. 4- Mortar level cover. 5- W-S DIN x2 (inside corners). 6- W-S TUB x2 (pass-through pipes). 7- WATER-STOP membrane with thermosealed adapter (2 x 2 m). 8- Evolux Tryphon Kit box.

**NEW!**

# COMPLETE SHOWER KIT **EVOLUX RUBER KIT - ANTIVANDALIC**


Evolux Ruber Kit (with Ruber Drain)

Evolux Lisa Antivandalic



FINISHED	PRODUCT						LOGISTICS	
	REF. RUBER H50	REF. RUBER H28	FLOW RATE (l/m)	MODEL	MEASURE (cm)	W-S MEMBRANE (m)	UDS/BOX	UDS/PALLET
	IE41701	IE41701R	27	LISA ANTIVANDALIC	70	2 x 2 · 4 m <sup>2</sup>	6	40
	IE41702	IE41702R	27	LISA ANTIVANDALIC	80	2 x 2 · 4 m <sup>2</sup>	6	40
	IE41703	IE41703R	27	LISA ANTIVANDALIC	90	2 x 2 · 4 m <sup>2</sup>	6	40

The system includes

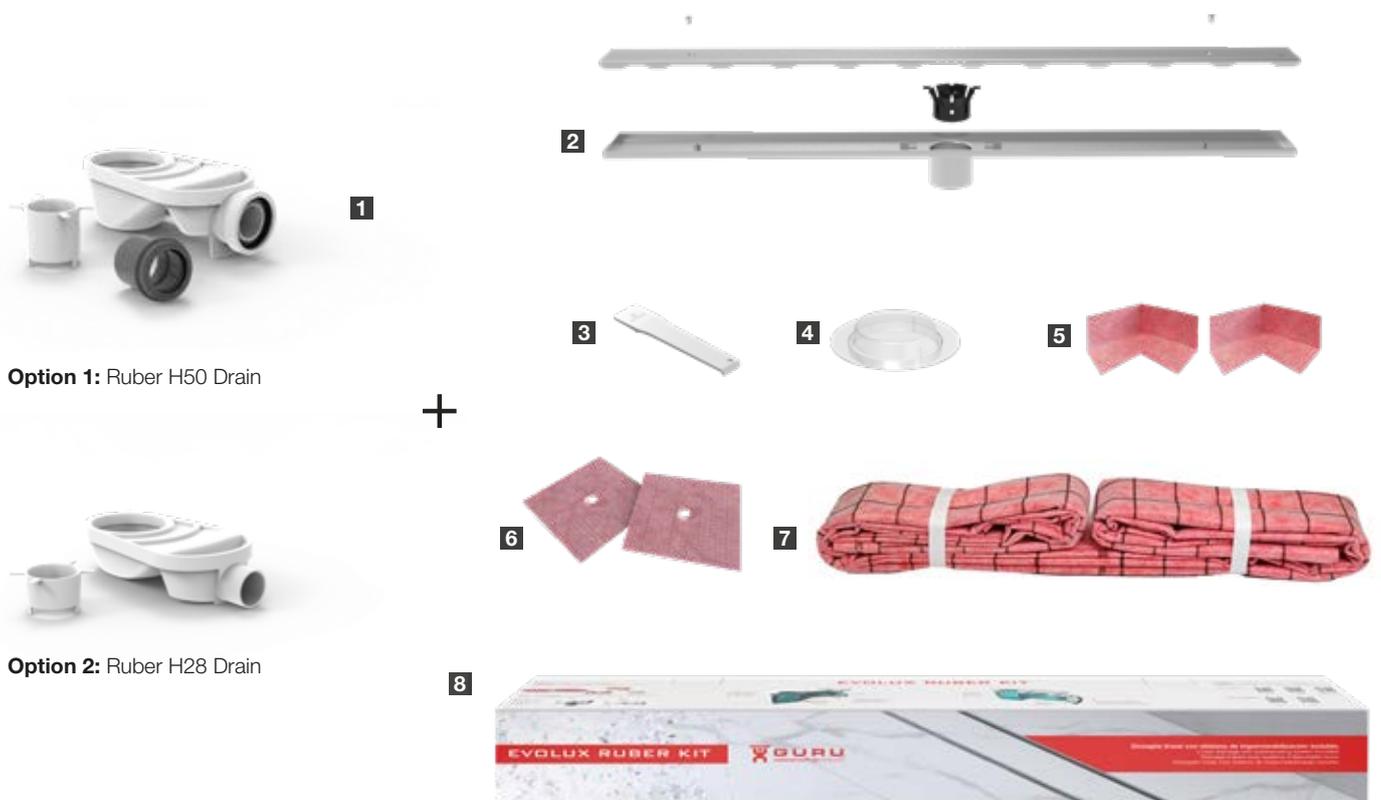

**Option 1:** Ruber H50 Drain

**Option 2:** Ruber H28 Drain

**\*Installation height (including 1 cm thick pavement):**

RUBER H50	RUBER H28
93 mm	73 mm

**1-** Drain of choice. **2-** Grate and channel EVOLUX LISA ANTIVANDALIC (size of choice) and hair collector. **3-** Grate remover. **4-** Mortar level cover. **5-** W-S DIN x2 (inside corners). **6-** W-S TUB x2 (pass-through pipes). **7-** WATER-STOP membrane with thermosealed adapter (2 x 2 m). **8-** Evolux Tryphon Kit box.

# COMPLETE SHOWER KIT **EVOLUX RUBER KIT - LISA GOLD/DARK**

Evolux Ruber Kit (with Ruber Drain)

Evolux Lisa Gold

Evolux Lisa Dark



FINISHED	PRODUCT						LOGISTICS	
	REF. RUBER H50	REF. RUBER H28	FLOW RATE (l/m)	MODEL	MEASURE (cm)	W-S MEMBRANE (m)	UDS/ BOX	UDS/ PALLET
●	IE61000	IE61000R	27	LISA GOLD	60	2 x 2 · 4 m <sup>2</sup>	6	40
●	IE61001	IE61001R	27	LISA GOLD	70	2 x 2 · 4 m <sup>2</sup>	6	40
●	IE61002	IE61002R	27	LISA GOLD	80	2 x 2 · 4 m <sup>2</sup>	6	40
●	IE61003	IE61003R	27	LISA GOLD	90	2 x 2 · 4 m <sup>2</sup>	6	40
●	IE51000	IE51000R	27	LISA DARK	60	2 x 2 · 4 m <sup>2</sup>	6	40
●	IE51001	IE51001R	27	LISA DARK	70	2 x 2 · 4 m <sup>2</sup>	6	40
●	IE51002	IE51002R	27	LISA DARK	80	2 x 2 · 4 m <sup>2</sup>	6	40
●	IE51003	IE51003R	27	LISA DARK	90	2 x 2 · 4 m <sup>2</sup>	6	40
●	IE51004	IE51004R	27	LISA DARK	100	2 x 2 · 4 m <sup>2</sup>	6	40
●	IE51005	IE51005R	27	LISA DARK	120	2 x 2 · 4 m <sup>2</sup>	3	32
●	IE51150	IE51150R	27	LISA DARK	150	2 x 2 · 4 m <sup>2</sup>	3	32
●	IE51180	IE51180R	27	LISA DARK	180	2 x 2 · 4 m <sup>2</sup>	3	32

## The system includes



Option 1: Ruber H50 Drain

Option 2: Ruber H28 Drain

\*Installation height (including 1 cm thick pavement):

RUBER H50	RUBER H28
93 mm	73 mm

- 1- Drain of choice. 2- Grate and channel EVOLUX LISA GOLD o LISA DARK (size of choice) and hair collector.
- 3- Grate remover. 4- Mortar level cover. 5- W-S DIN x2 (inside corners). 6- W-S TUB x2 (pass-through pipes). 7- WATER-STOP membrane with thermosealed adapter (2 x 2 m). 8- Evolux Tryphon Kit box.

# COMPLETE SHOWER KIT **EVOLUX RUBER KIT - MICROCEMENT**

Evolux Ruber Kit (with Ruber Drain)

Evolux Microcement



Evolux Microcement Gold




Evolux Microcement Dark



FINISHED	PRODUCT						LOGISTICS	
	REF. RUBER H50	REF. RUBER H28	FLOW RATE (l/m)	MODEL	MEASURE (cm)	W-S MEMBRANE (m)	UDS/ BOX	UDS/ PALLET
●	IE47000	IE47000R	24	MICROCEMENT	60	2 x 2 · 4 m <sup>2</sup>	6	40
●	IE47001	IE47001R	24	MICROCEMENT	70	2 x 2 · 4 m <sup>2</sup>	6	40
●	IE47002	IE47002R	24	MICROCEMENT	80	2 x 2 · 4 m <sup>2</sup>	6	40
●	IE47003	IE47003R	24	MICROCEMENT	90	2 x 2 · 4 m <sup>2</sup>	6	40
●	IE47004	IE47004R	24	MICROCEMENT	100	2 x 2 · 4 m <sup>2</sup>	6	40
●	IE47005	IE47005R	24	MICROCEMENT	120	2 x 2 · 4 m <sup>2</sup>	3	32
●	IE67000	IE67000R	24	MICRO GOLD	60	2 x 2 · 4 m <sup>2</sup>	6	40
●	IE67001	IE67001R	24	MICRO GOLD	70	2 x 2 · 4 m <sup>2</sup>	6	40
●	IE67002	IE67002R	24	MICRO GOLD	80	2 x 2 · 4 m <sup>2</sup>	6	40
●	IE67003	IE67003R	24	MICRO GOLD	90	2 x 2 · 4 m <sup>2</sup>	6	40
●	IE57000	IE57000R	24	MICRO DARK	60	2 x 2 · 4 m <sup>2</sup>	6	40
●	IE57001	IE57001R	24	MICRO DARK	70	2 x 2 · 4 m <sup>2</sup>	6	40
●	IE57002	IE57002R	24	MICRO DARK	80	2 x 2 · 4 m <sup>2</sup>	6	40
●	IE57003	IE57003R	24	MICRO DARK	90	2 x 2 · 4 m <sup>2</sup>	6	40
●	IE57004	IE57004R	24	MICRO DARK	100	2 x 2 · 4 m <sup>2</sup>	6	40
●	IE57005	IE57005R	24	MICRO DARK	120	2 x 2 · 4 m <sup>2</sup>	3	32

The system includes

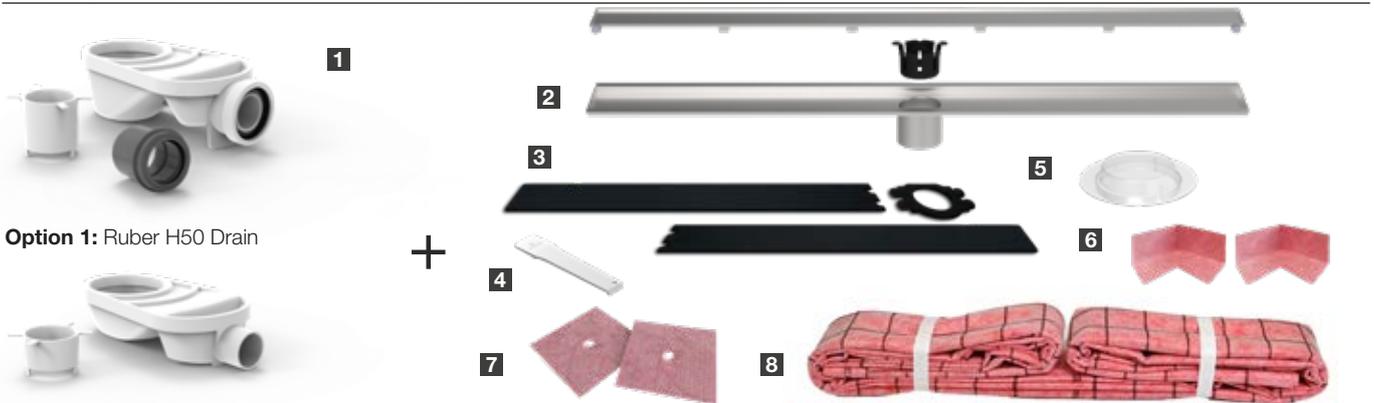

Option 1: Ruber H50 Drain

Option 2: Ruber H28 Drain

\*Installation height (including 1 cm thick pavement):

RUBER H50	RUBER H28
93 mm	73 mm

1- Drain of choice. 2- Grate and channel EVOLUX MICROCEMENT (size of choice) and hair collector. 3- Installation template 4- Grate remover. 5- Mortar level cover. 6- W-S DIN x2 (inside corners). 7- W-S TUB x2 (pass-through pipes). 8- WATER-STOP membrane with thermosealed adapter (2 x 2 m). 9- Evolux Tryphon Kit box.

# COMPLETE SHOWER KIT **EVOLUX RUBER KIT - INTEGRA**

Evolux Ruber Kit (with Ruber Drain)

## Evolux Integra



FINISHED	PRODUCT						LOGISTICS	
	REF. RUBER H50	REF. RUBER H28	FLOW RATE (l/m)	MODEL	MEASURE (cm)	W-S MEMBRANE (m)	UDS/ BOX	UDS/ PALLET
-	IE45040	IE45040R	27	INTEGRA	40	2 x 2 · 4 m <sup>2</sup>	6	40
-	IE45050	IE45050R	27	INTEGRA	50	2 x 2 · 4 m <sup>2</sup>	6	40
-	IE45000	IE45000R	27	INTEGRA	60	2 x 2 · 4 m <sup>2</sup>	6	40
-	IE45001	IE45001R	27	INTEGRA	70	2 x 2 · 4 m <sup>2</sup>	6	40
-	IE45002	IE45002R	27	INTEGRA	80	2 x 2 · 4 m <sup>2</sup>	6	40
-	IE45003	IE45003R	27	INTEGRA	90	2 x 2 · 4 m <sup>2</sup>	6	40
-	IE45004	IE45004R	27	INTEGRA	100	2 x 2 · 4 m <sup>2</sup>	6	40
-	IE45005	IE45005R	27	INTEGRA	120	2 x 2 · 4 m <sup>2</sup>	3	32

### The system includes



Option 1: Ruber H50 Drain

Option 2: Ruber H28 Drain

RUBER H50	RUBER H28
93 mm + PAVEMENT	73 mm + PAVEMENT

1- Drain of choice. 2- Grate and channel EVOLUX INTEGRA (size of choice) and hair collector. 3- Installation template 4- Grate remover. 5- Mortar level cover. 6- W-S DIN x2 (inside corners). 7- W-S TUB x2 (pass-through pipes). 8- WATER-STOP membrane with thermosealed adapter (2 x 2 m). 9- Evolux Tryphon Kit box.

Other finishes:



Cristal

Lisa Cream

Lisa Grey



Lisa Chocolate

Lisa Stone

Lisa Light

# COMPLETE SHOWER KIT **EVOLUX RUBER KIT LINEAL**

Evolux Ruber Kit Lineal (with Ruber Drain)

FINISHED	PRODUCT						LOGISTICS	
	REF. RUBER H50 	REF. RUBER H28 	FLOW RATE (l/m)	MODEL	MEASURE (cm)	W-S MEMBRANE (m)	UDS/ BOX 	UDS/ PALLET 
○	IE49001	IE49001R	27	CRISTAL	70	2 x 2 · 4 m <sup>2</sup>	6	40
○	IE49002	IE49002R	27	CRISTAL	80	2 x 2 · 4 m <sup>2</sup>	6	40
○	IE49003	IE49003R	27	CRISTAL	90	2 x 2 · 4 m <sup>2</sup>	6	40
●	IE61600	IE61600R	27	LISA CREAM	60	2 x 2 · 4 m <sup>2</sup>	6	40
●	IE61601	IE61601R	27	LISA CREAM	70	2 x 2 · 4 m <sup>2</sup>	6	40
●	IE61602	IE61602R	27	LISA CREAM	80	2 x 2 · 4 m <sup>2</sup>	6	40
●	IE61603	IE61603R	27	LISA CREAM	90	2 x 2 · 4 m <sup>2</sup>	6	40
●	IE61604	IE61604R	27	LISA CREAM	100	2 x 2 · 4 m <sup>2</sup>	6	40
●	IE61605	IE61605R	27	LISA CREAM	120	2 x 2 · 4 m <sup>2</sup>	3	32
●	IE61500	IE61500R	27	LISA GREY	60	2 x 2 · 4 m <sup>2</sup>	6	40
●	IE61501	IE61501R	27	LISA GREY	70	2 x 2 · 4 m <sup>2</sup>	6	40
●	IE61502	IE61502R	27	LISA GREY	80	2 x 2 · 4 m <sup>2</sup>	6	40
●	IE61503	IE61503R	27	LISA GREY	90	2 x 2 · 4 m <sup>2</sup>	6	40
●	IE61504	IE61504R	27	LISA GREY	100	2 x 2 · 4 m <sup>2</sup>	6	40
●	IE61505	IE61505R	27	LISA GREY	120	2 x 2 · 4 m <sup>2</sup>	6	40
●	IE61400	IE61400R	27	LISA CHOCOLATE	60	2 x 2 · 4 m <sup>2</sup>	6	40
●	IE61401	IE61401R	27	LISA CHOCOLATE	70	2 x 2 · 4 m <sup>2</sup>	6	40
●	IE61402	IE61402R	27	LISA CHOCOLATE	80	2 x 2 · 4 m <sup>2</sup>	6	40
●	IE61403	IE61403R	27	LISA CHOCOLATE	90	2 x 2 · 4 m <sup>2</sup>	6	40
●	IE61404	IE61404R	27	LISA CHOCOLATE	100	2 x 2 · 4 m <sup>2</sup>	6	40
●	IE61405	IE61405R	27	LISA CHOCOLATE	120	2 x 2 · 4 m <sup>2</sup>	3	32
●	IE61300	IE61300R	27	LISA STONE	60	2 x 2 · 4 m <sup>2</sup>	6	40
●	IE61301	IE61301R	27	LISA STONE	70	2 x 2 · 4 m <sup>2</sup>	6	40
●	IE61302	IE61302R	27	LISA STONE	80	2 x 2 · 4 m <sup>2</sup>	6	40
●	IE61303	IE61303R	27	LISA STONE	90	2 x 2 · 4 m <sup>2</sup>	6	40
●	IE61304	IE61304R	27	LISA STONE	100	2 x 2 · 4 m <sup>2</sup>	6	40
●	IE61305	IE61305R	27	LISA STONE	120	2 x 2 · 4 m <sup>2</sup>	3	32
○	IE68000	IE68000R	27	LISA LIGHT	60	2 x 2 · 4 m <sup>2</sup>	6	40
○	IE68001	IE68001R	27	LISA LIGHT	70	2 x 2 · 4 m <sup>2</sup>	6	40
○	IE68002	IE68002R	27	LISA LIGHT	80	2 x 2 · 4 m <sup>2</sup>	6	40
○	IE68003	IE68003R	27	LISA LIGHT	90	2 x 2 · 4 m <sup>2</sup>	6	40
○	IE68004	IE68004R	27	LISA LIGHT	100	2 x 2 · 4 m <sup>2</sup>	6	40
○	IE68005	IE68005R	27	LISA LIGHT	120	2 x 2 · 4 m <sup>2</sup>	3	32
○	IE68150	IE68150R	27	LISA LIGHT	150	2 x 2 · 4 m <sup>2</sup>	3	32
○	IE68180	IE68180R	27	LISA LIGHT	180	2 x 2 · 4 m <sup>2</sup>	3	32

SHOWER KIT FOR VINYL FLOORS **EVOLUX VINYL**

Say goodbye to leaky vinyl floors



EVOLUX VINYL is our newest **vinyl floor drain** innovation. It is notable for its ability to maintain a waterproof seal in bathrooms and changing rooms, while also being **easy to install**.

This kit comprises a gutter and a frame with a trim. It uses a watertight clamping system with MS putty to enable the installation of drainage in technical floors of hospitals, laboratories, wet rooms, etc.

### Features


- » Stainless steel structure
- » Watertightness assured
- » High drainage capacity
- » Hair collector included
- » Self-cleaning
- » Easy installation

### Specifications


- » Adjustable clamp from 1 mm to 5 mm
- » Antivandal
- » Stainless steel



Scan the QR code and discover more

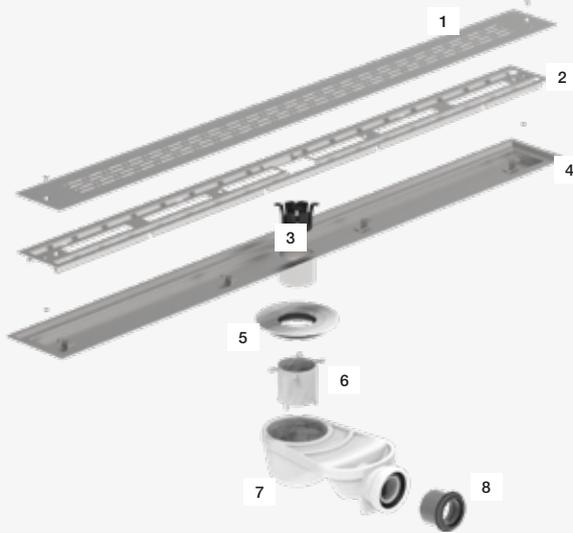

1. Evolux Vinyl grate
2. Framework
3. Hair collector
4. Vinyl Trough
5. Connection adapter
6. Ruber shower head
7. Ruber siphonic body
8. Reducer Ø 50/40 mm

PRODUCT				LOGISTICS	
REF. RUBER H50	REF. RUBER H28	MODEL	MEASURE (cm)	UDS/BOX	UDS/PALLET
					
IE70008	IE70008R	VINYL	15 x 15	3	50
IE70001	IE70001R	VINYL	70	6	40
IE70002	IE70002R	VINYL	80	6	40
IE70003	IE70003R	VINYL	90	6	40
IE70004	IE70004R	VINYL	100	6	40

The system includes



Option 1: Ruber H50 Drain

Option 2: Ruber H28 Drain

\*Installation height (including 1 cm thick pavement):

RUBER H50	RUBER H28
	
100 mm	80 mm

- 1- Drain of choice. 2- Grate and channel EVOLUX VINYL (size of choice) and hair collector. 3- Grate remover.
- 4- Mortar level cover. 5- W-S DIN x2 (inside corners). 6- W-S TUB x2 (pass-through pipes).
- 7- WATER-STOP membrane with thermosealed adapter (2 x 2 m). 8- Evolux Tryphon Kit box.

## COMPLETE SHOWER KIT **EVOLUX RUBER KIT SQUARE**

Equal parts effectiveness and efficiency




Lisa



Plus




Beat



Blues



bimobject

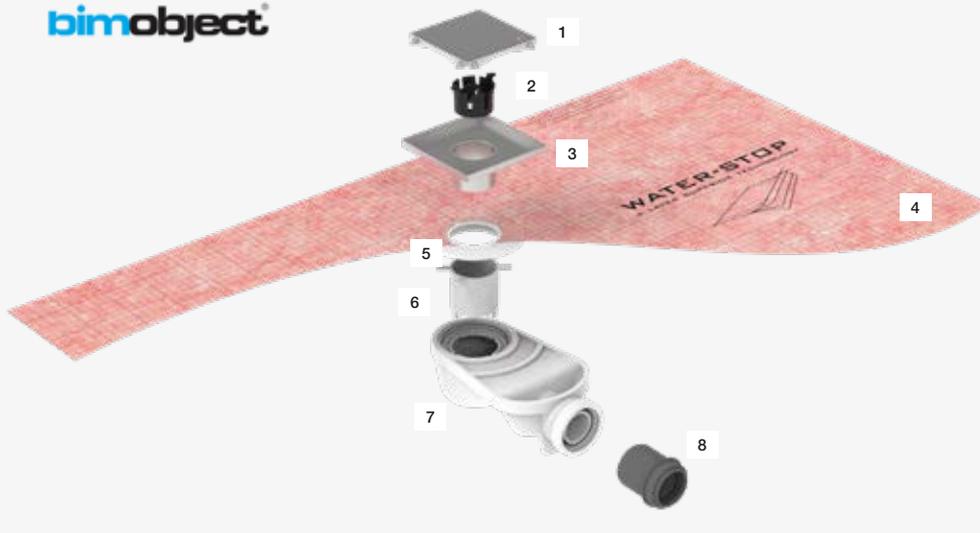

1. Evolux Square Grate
2. Hair collector
3. Evolux shower drain
4. Water-Stop membrane 2 x 2 m
5. Heat-sealed adapter
6. Ruber shower head
7. Ruber siphonic body
8. Reducer Ø50/40 mm

### Features



- » Stainless steel structure
- » Resistance to high loads
- » Waterproofing included
- » High drainage capacity
- » Easy installation
- » Effective cleaning
- » 10-year warranty

### Specifications

- » Elastic joints
- » Secondary drainage
- » 360° adjustable

# COMPLETE SHOWER KIT **EVOLUX RUBER KIT SQUARE**

Evolux Ruber Kit Square (with Ruber Drain)

FINISHED	PRODUCT						LOGISTICS	
	REF. RUBER H50 	REF. RUBER H28 	FLOW RATE (l/m)	MODEL	MEASURE (cm)	W-S MEMBRANE (m)	UDS/BOX 	UDS/PALLET 
●	IE41008	IE41008R	26	LISA	11,6 x 11,6	1,5 x 2 · 3 m <sup>2</sup>	3	50
●	IE41009	IE41009R	27	LISA	15 x 30	1,5 x 2 · 3 m <sup>2</sup>	3	50
●	IE41708	IE41708R	26	LISA ANTIVANDAL	11,6 x 11,6	1,5 x 2 · 3 m <sup>2</sup>	3	50
●	IE42008	IE42008R	28	PLUS	11,6 x 11,6	1,5 x 2 · 3 m <sup>2</sup>	3	50
●	IE42009	IE42009R	29	PLUS	15 x 30	1,5 x 2 · 3 m <sup>2</sup>	3	50
●	IE42708	IE42708R	26	PLUS ANTIVANDAL	11,6 x 11,6	1,5 x 2 · 3 m <sup>2</sup>	3	50
●	IE51008	IE51008R	26	LISA DARK	11,6 x 11,6	1,5 x 2 · 3 m <sup>2</sup>	3	50
●	IE51009	IE51009R	27	LISA DARK	15 x 30	1,5 x 2 · 3 m <sup>2</sup>	3	50
●	IE60008	IE60008R	28	BEAT DARK	11,6 x 11,6	1,5 x 2 · 3 m <sup>2</sup>	3	50
○	IE61108	IE61108R	26	LISA LIGHT	11,6 x 11,6	1,5 x 2 · 3 m <sup>2</sup>	3	50
○	IE62108	IE62108R	28	PLUS LIGHT	11,6 x 11,6	1,5 x 2 · 3 m <sup>2</sup>	3	50
○	IE61708	IE61708R	28	BLUES LIGHT	11,6 x 11,6	1,5 x 2 · 3 m <sup>2</sup>	3	50
●	IE47008	IE47008R	25	MICROCEMENT	11,6 x 11,6	1,5 x 2 · 3 m <sup>2</sup>	3	50
●	IE47009	IE47009R	26	MICROCEMENT	15 x 30	1,5 x 2 · 3 m <sup>2</sup>	3	50
●	IE67008	IE67008R	25	MICRO GOLD	11,6 x 11,6	1,5 x 2 · 3 m <sup>2</sup>	3	50
●	IE67009	IE67009R	26	MICRO GOLD	15 x 30	1,5 x 2 · 3 m <sup>2</sup>	3	50
●	IE57008	IE57008R	25	MICRO DARK	11,6 x 11,6	1,5 x 2 · 3 m <sup>2</sup>	3	50
●	IE57009	IE57009R	26	MICRO DARK	15 x 30	1,5 x 2 · 3 m <sup>2</sup>	3	50
○	IE49009	IE49009R	27	CRISTAL	15 x 30	1,5 x 2 · 3 m <sup>2</sup>	3	50
-	IE45008	IE45008R	26	INTEGRA	11,6 x 11,6	1,5 x 2 · 3 m <sup>2</sup>	3	50
-	IE45009	IE45009R	25	INTEGRA	15 x 30	1,5 x 2 · 3 m <sup>2</sup>	3	50

## The system includes



Option 1: Ruber H50 Drain

Option 2: Ruber H28 Drain

\*Installation height (including 1 cm thick pavement):

RUBER H50 	RUBER H28 
93 mm	73 mm

- 1- Drain of choice. 2- Grate and channel EVOLUX (size of choice) and hair collector. 3- Grate remover. 4- Mortar level cover. 5- W-S DIN x2 (inside corners). 6- W-S TUB x2 (pass-through pipes). 7- WATER-STOP membrane with thermosealed adapter (1,5 x 2 m / 2 x 2 m). 8- Evolux Square box.

## COMPLETE SHOWER KIT **EVO SYSTEM**

Efficiency at the best price




The EVO System is a **shower system** that **includes waterproofing around the drain** to provide protection against water damage in areas with floor drainage.

The product comprises a trap drain with a low profile, a WATER-STOP waterproof sheet that is preattached and sealed to a special adapter for connecting to the drain, and a stainless-steel grille with an ABS bowl.



Scan the QR code and discover more

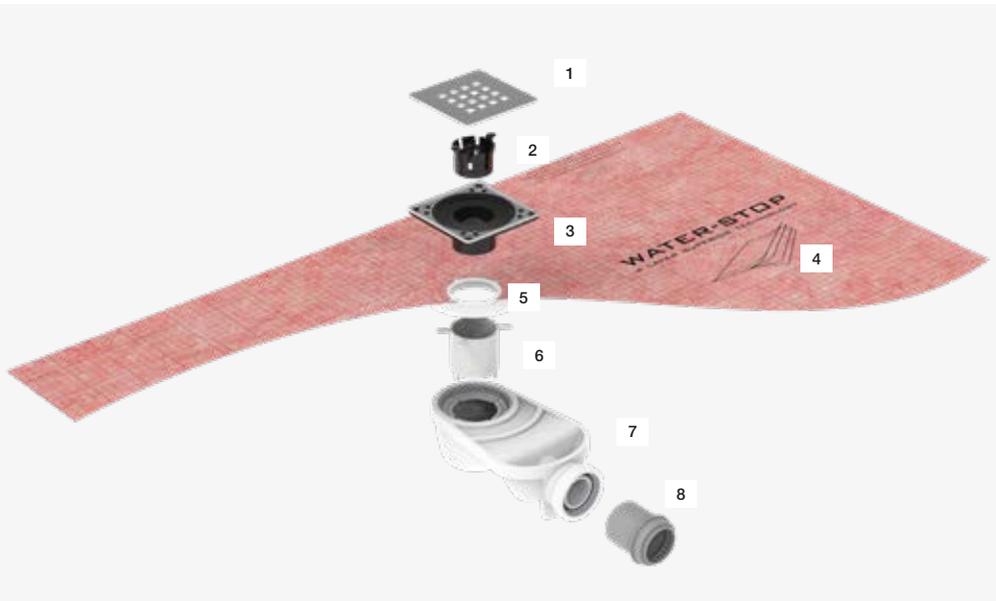

1. Evo grate
2. Hair collector
3. Evo Shower drain
4. Water-Stop membrane 2 x 2 m
5. Connection adapter
6. Rubber shower head
7. Rubber siphonic body
8. Reducer Ø 50/40 mm

### Features

- » Waterproofing included
- » Offset drain position
- » High drainage capacity
- » Easy installation
- » Effective cleaning
- » 10-year warranty

### Specifications

- » Elastic joints
- » Secondary drainage
- » 360° adjustable



Evo




Plus Evo




Onde Evo



Disuasoria




Polished




Black



Bronze




Gold



Mint



Rose



Sapphire



Snowy

## COMPLETE SHOWER KIT EVO SYSTEM

### Evo System (with Ruber Drain)

PRODUCT						LOGISTICS	
FINISHED	REF. RUBER H50	REF. RUBER H28	FLOW RATE (l/min)	DESCRIPTION	W-S MEMBRANE	UDS/BOX	UDS/PALLET
	IB20015	IB20015R	24	EVO	1,5 x 2 · 3 m <sup>2</sup>	6	84
	IB20016	IB20016R	26	PLUS EVO	1,5 x 2 · 3 m <sup>2</sup>	6	84
	IB20017	IB20017R	26	ONDE EVO	1,5 x 2 · 3 m <sup>2</sup>	6	84
	IB20007	IB20007R	26	DISUASORIA	1,5 x 2 · 3 m <sup>2</sup>	6	84

### Sistema Evo Colors (con Sumidero Ruber)

PRODUCT						LOGISTICS	
FINISHED	REF. RUBER H50	REF. RUBER H28	FLOW RATE (l/min)	DESCRIPTION	W-S MEMBRANE	UDS/BOX	UDS/PALLET
	IB20018	IB20018R	26	PLUS EVO POLISHED	1,5 x 2 · 3 m <sup>2</sup>	6	84
	IB20019	IB20019R	26	PLUS EVO BLACK	1,5 x 2 · 3 m <sup>2</sup>	6	84
	IB20020	IB20020R	26	PLUS EVO BRONZE	1,5 x 2 · 3 m <sup>2</sup>	6	84
	IB20021	IB20021R	26	PLUS EVO GOLD	1,5 x 2 · 3 m <sup>2</sup>	6	84
	IB20023	IB20023R	26	PLUS EVO MINT	1,5 x 2 · 3 m <sup>2</sup>	6	84
	IB20024	IB20024R	26	PLUS EVO ROSE	1,5 x 2 · 3 m <sup>2</sup>	6	84
	IB20025	IB20025R	26	PLUS EVO SAPPHIRE	1,5 x 2 · 3 m <sup>2</sup>	6	84
	IB20026	IB20026R	26	PLUS EVO SNOWY	1,5 x 2 · 3 m <sup>2</sup>	6	84

### The system includes




**Option 1: Ruber H50 Drain**

+




**Option 2: Ruber H28 Drain**

**\*Installation height (including 1 cm thick pavement):**

 RUBER H0	 RUBER H28
93 mm	73 mm



**1-** Drain of choice. **2-** INOX grate and ABS shower drain (size of choice) **3-** Grate remover. **4-** Mortar level cover. **5-** W-S DIN x2 (inside corners). **6-** W-S TUB x2 (pass-through pipes). **7-** WATER-STOP membrane with thermosealed adapter (1,5 x 2 m). **8-** Evo box.

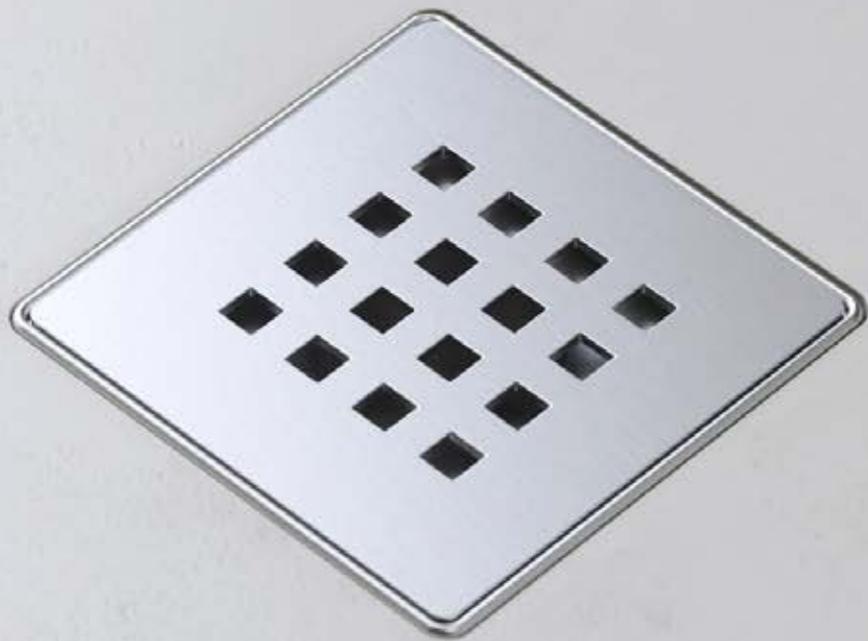

BATHTUB KIT **W-S BATHKIT**

Drain for bathtubs with included waterproofing!



W-S BATH KIT is a **click-clack drain** system with an overflow, designed for **built-in bathtubs**. The system ensures a perfect connection between the Water-Stop waterproofing membrane and the drain, effectively **preventing** any **leaks** or **moisture issues**.

PRODUCT				LOGISTICS	
FINISHED	REF.	DESCRIPTION	W-S MEMBRANE (m)	UDS/BOX 	UDS/PALLET 
	IA11000	W-S BATHKIT INOX	2 x 3 · 6 m <sup>2</sup>	4	40
	IA11020	W-S BATHKIT GOLD	2 x 3 · 6 m <sup>2</sup>	4	40
	IA11021	W-S BATHKIT DARK	2 x 3 · 6 m <sup>2</sup>	4	40
	IA11022	W-S BATH INOX	-	6	94
	IA11023	W-S BATH GOLD	-	6	94
	IA11024	W-S BATH DARK	-	6	94



Scan the QR code and discover more



### Features

- » Stainless steel structure
- » High drainage capacity
- » Available in different colors
- » Easy installation

### Specifications

- » Click-Clack Valve
- » Built-in overflow
- » PVD and textured finishes
- » Outlet tube Ø40 mm

W-S BATHKIT

W-S BATH



Click-Clack valve with adjustable siphon.



Stopper (stainless steel, black, and gold finish).



Overflow.



WATER-STOP membrane 2 x 3 m.



WATER-STOP roll 1 x 5 m.



2x



Sealant W-S MASTIC.

Say goodbye to silicone problems with **SAFE BAND!**

## BATHTUB

Ensure the safe and uncomplicated installation of bathtubs, while maximising their benefits. Thanks to SAFE BAND, waterproofing and sealing joints and connections between the bathtub, walls, and floor is made simple.

Extends the life of your installation, prevents future damage and adds the waterproof protection your bathtub needs.

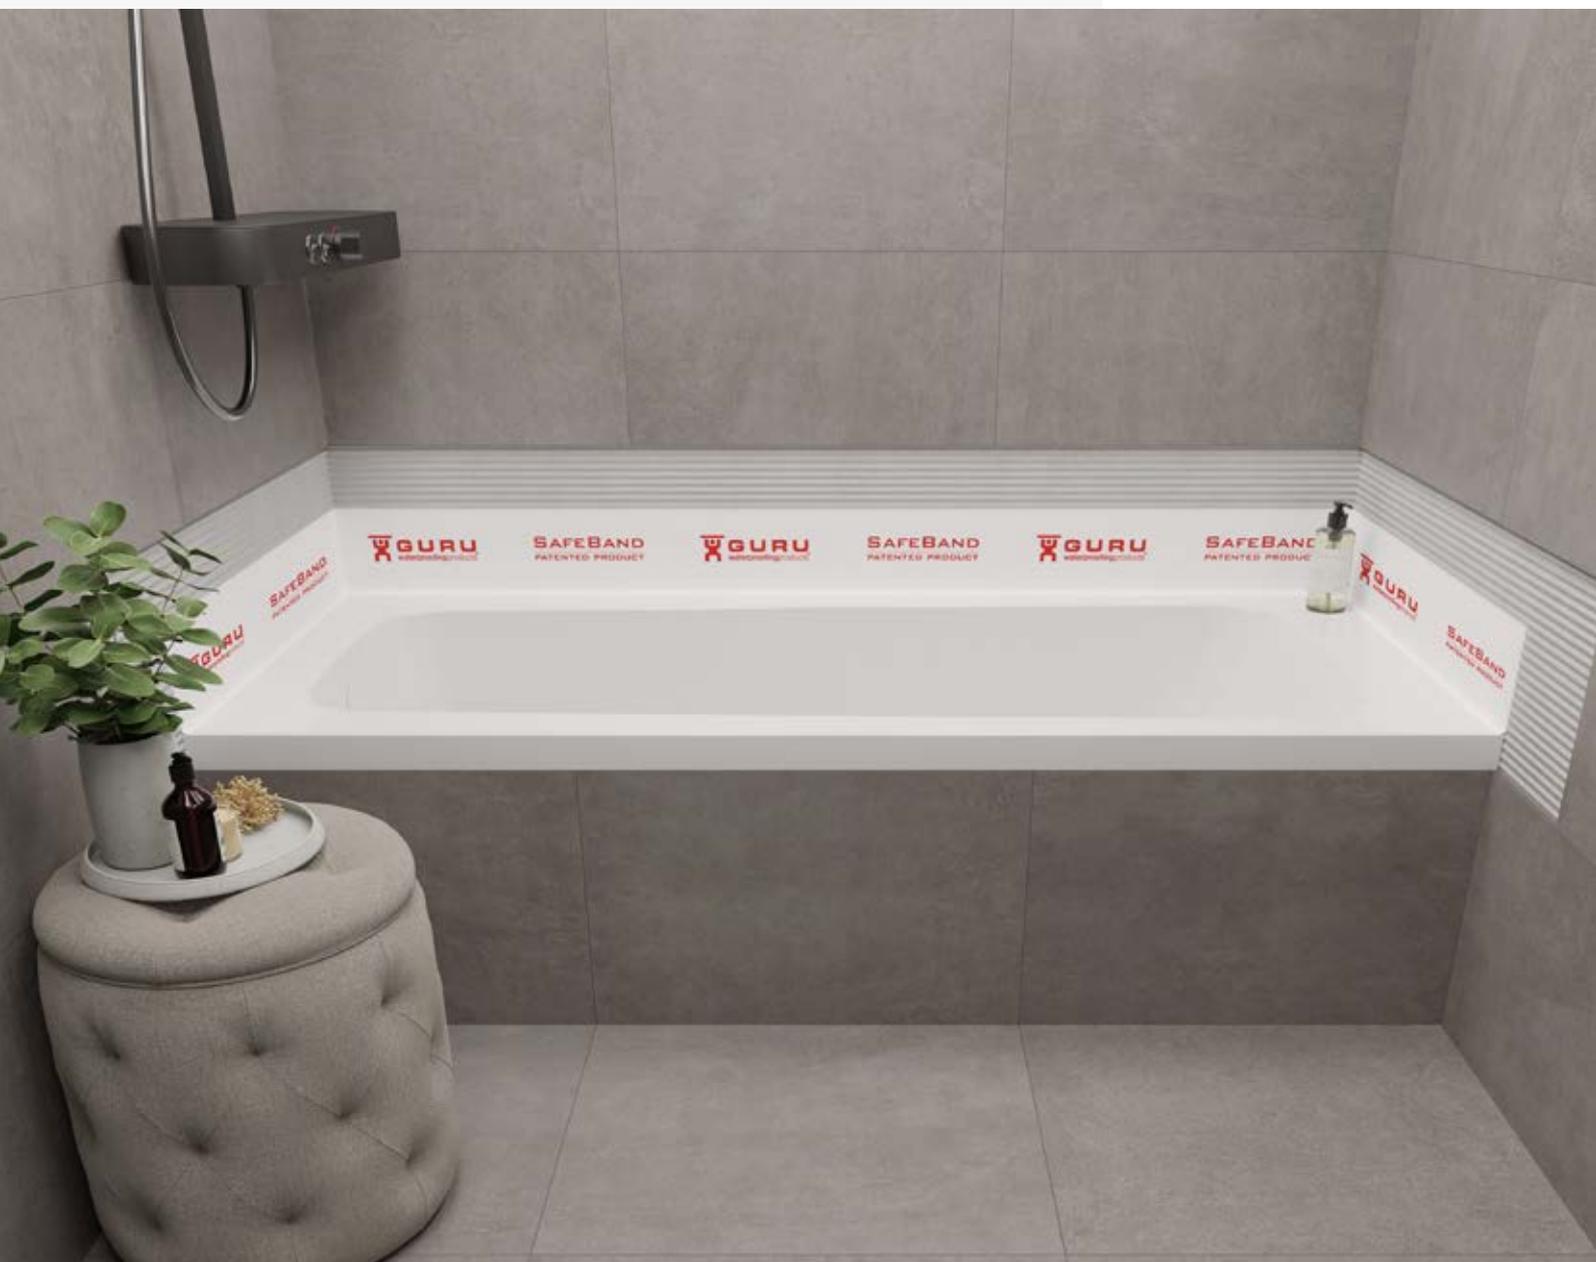



## SHOWERS

SAFEFLEX is an excellent solution for installing prefabricated shower trays. It eliminates concerns about limited-service life and is very easy to apply due to its flexibility and self-adhesive nature.

It effectively prevents leaks and possible imperfections, ensuring complete waterproofing in the connections between the shower tray, walls, and floor.


ANTI-LEAK BAND **SAFE**BAND

DOUBLE WATERPROOFING!



 A photograph showing the installation of a shower tray. A white shower tray is being placed on a floor. A red waterproofing membrane with a grid pattern and the word 'WATER-STOP' is being applied around the tray. A callout box points to the second layer of waterproofing.
 

Second layer of waterproofing with WATER-STOP.



## GURU PATENTED PRODUCT

SAFEBAND revolutionises the installation of **shower trays and bathtubs** with its multi-axial and flexible antileak strip. This addition ensures **tight joints with walls and floors** and serves as a superior **alternative to silicone**.

Why choose SAFEBAND? ESTIL GURU's **patented design** provides a strong hold and **double protection** against leaks, effectively addressing the issues associated with silicone, such as limited durability, mould and dampness, and the risk of leaks.

This advanced sealant **meets the strict requirements of DIN 18534** and has been thoroughly evaluated by the independent Kiwa **institute in accordance with ETAG 022-2**.



Scan the QR code and discover more



### Features

- » Barrier on two different planes
- » Elastic flexible material
- » Fibres on both sides to improve adhesion to the substrate
- » Extra strong fixative
- » It has a rim height of 12 cm (rise/connection overlap)

### Specifications

- » Grammage (gr): 250
- » Width (cm): 14
- » Length (m): 2, 3'5, 6, 30
- » Elongation: 65%

### Elements included:



PRODUCT			LOGISTICS	
REF.	DESCRIPTION	MEASURE	UDS/BOX 	UDS/PALLET 
IG66016	KIT SAFEBAND	2 m x 14 cm	12	324
IG66001	KIT SAFEBAND	3,5 m x 14 cm	12	324
IG66002	KIT SAFEBAND	6 m x 14 cm	12	324
IG66003	KIT SAFEBAND	30 m x 14 cm	6	54

## SHOWER SHELVES **SHELF**

Install your shower shelf without the need for any construction work!



SHELF is a **shower shelf** that eliminates the need for drilling during installation, protecting walls from potential damage and **avoiding the need for construction work**.

Made of **AISI 316 Marine-Grade** stainless steel, it stands out for its corrosion resistance, combining durability and aesthetics. Its 1 mm thick design **allows installation in 1.5 mm joints between tiles**.

It is notable for its capacity to **support weights heavier than the standard** and for its **speedy and efficient installation, taking less than 30 minutes**.



Scan the QR code and discover more



- Inox
- Dark
- Light
- Gold
- Nickel


### Features

- » Easy installation in renovations and new constructions
- » Unique aesthetic finishes
- » Standard: UNE67100
- » No-drill installation (no risk of pipe breakage or loss of waterproofing)


### Specifications

- » Thickness: 1 mm
- » Made of AISI 316 Stainless Steel - Marine Grade
- » Finishes in PVD, textured, and satinized


#### Triangle

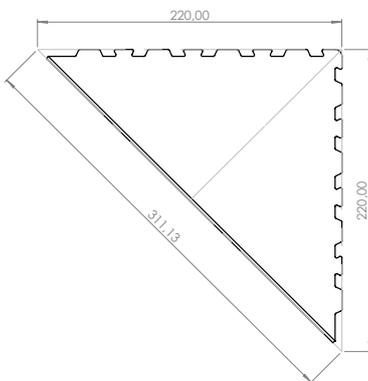

#### Trapezoid

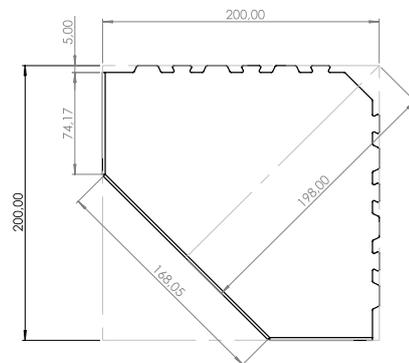

#### Trapezoid Asim

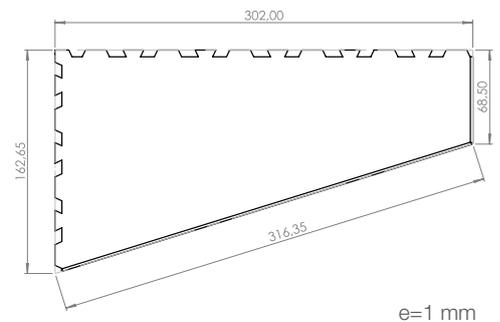

Measurements in mm

# SHOWER SHELVES SHELF

Shelf

PRODUCT				LOGISTICS	
REF.	SHAPE	MODEL	FINISHED	UDS/BOX 	UDS/PALLET 
IZU0302	TRIANGLE	PLUS	INOX	11	297
IZU0301	TRIANGLE	PLUS	DARK	11	297
IZU0314	TRIANGLE	PLUS	NICKEL	11	297
IZU0300	TRIANGLE	PLUS	WHITE	11	297
IZU0004	TRIANGLE	BEAT	INOX	11	297
IZU0000	TRIANGLE	BEAT	DARK	11	297
IZU0005	TRIANGLE	BEAT	NICKEL	11	297
IZU0305	TRAPEZOID	PLUS	INOX	11	297
IZU0304	TRAPEZOID	PLUS	DARK	11	297
IZU0312	TRAPEZOID	PLUS	NICKEL	11	297
IZU0303	TRAPEZOID	PLUS	WHITE	11	297
IZU0006	TRAPEZOID	BEAT	INOX	11	297
IZU0001	TRAPEZOID	BEAT	DARK	11	297
IZU0007	TRAPEZOID	BEAT	NICKEL	11	297
IZU0008	TRAPEZOID	BEAT	WHITE	11	297
IZU0009	TRAPEZOID	BEAT	GOLD	11	297
IZU0010	TRAPEZOID	BEAT	POLISHED	11	297
IZU0308	TRAPEZOID ASIM	PLUS	INOX	11	297
IZU0307	TRAPEZOID ASIM	PLUS	DARK	11	297
IZU0313	TRAPEZOID ASIM	PLUS	NICKEL	11	297
IZU0306	TRAPEZOID ASIM	PLUS	WHITE	11	297


Shelf Triangle Plus



Shelf Triangle Beat



Shelf Trapezoid Plus



Shelf Trapezoid Beat



Shelf Trapezoid Asim Plus





Shelf Trapezoid Beat Gold



Revolux Curve Gold

## ACCESSORIES EVO / EVOLUX



REF.	DESCRIPTION	FINISHED
IG67004	BRACKET UNIÓN	SATIN

The EVOLUX shower system family is designed to be connected seamlessly without the need for fastening, thanks to our stainless steel joint bracket.



REF.	DESCRIPTION	MATERIAL
IG01143	VERTICAL OUTLET RUBER KIT	POLYPROPYLENE

RUBER drain adaptation kit for vertical outlet installation under the structure. It consists of an extension and an adapter.

25 uds.



REF.	DESCRIPTION	MATERIAL
IG60034	PACK 25 HAIR COLLECTORS	ABS

Pack of 30 hair collectors made of ABS.



REF.	DESCRIPTION
IF55016	RUBER ADAPTER WITH 40 X 40 CM W-S MEMBRANE

A 40 x 40 cm piece of WATER-STOP membrane with an adapter for the RUBER drain, heat-sealed at the factory.



REF.	DESCRIPTION
IG60035	KIT RUBER H50 DRAIN
IG60030	KIT RUBER H28 DRAIN

Ruber Drain Kit. Option of standard and reduced height.



REF.	DESCRIPTION
IG60036	TRYPHON SHOWER DRAIN
IG60031	TRYPHON REDUCED SHOWER DRAIN
IG60032	TRYPHON VERTICAL SHOWER DRAIN

Tryphon Drain Kit. Option of standard and reduced height, and vertical outlet.

## INSTALLATION PROFILES G-PRO WALL

Suitable for wall-mounted installation.

REF.	DESCRIPTION
IJ80008	GPRO-WALL 11,6 cm
IJ80009	GPRO-WALL 15 cm
IJ80006	GPRO-WALL 30 cm
IJ80007	GPRO-WALL 40 cm
IJ80000	GPRO-WALL 60 cm
IJ80001	GPRO-WALL 70 cm

REF.	DESCRIPTION
IJ80002	GPRO-WALL 80 cm
IJ80003	GPRO-WALL 90 cm
IJ80004	GPRO-WALL 100 cm
IJ80005	GPRO-WALL 120 cm
IJ80013	GPRO-WALL 150 cm
IJ80014	GPRO-WALL 180 cm



## INSTALLATION PROFILES G-PRO LEVEL


Decorative trim profiles can be used to cover the side slope of the shower enclosure. They ensure a constant 2% slope in accordance with the CTE (Technical Building Code). High-quality steel notched trowel. They can come in satin or textured finishes and a variety of colours.

### Left profile

	REF.	DESCRIPTION	FINISHED
●	IJ80015	G-PRO LEVEL 120 cm - L.	INOX
●	IJ80017	G-PRO LEVEL 120 cm - L.	STONE
●	IJ80019	G-PRO LEVEL 120 cm - L.	CHOCO
●	IJ80021	G-PRO LEVEL 120 cm - L.	CREAM
●	IJ80023	G-PRO LEVEL 120 cm - L.	GREY
○	IJ80025	G-PRO LEVEL 120 cm - L.	WHITE
●	IJ80027	G-PRO LEVEL 120 cm - L.	DARK

### Right profile

	REF.	DESCRIPTION	FINISHED
●	IJ80029	G-PRO LEVEL 120 cm - R.	INOX
●	IJ80031	G-PRO LEVEL 120 cm - R.	STONE
●	IJ80033	G-PRO LEVEL 120 cm - R.	CHOCO
●	IJ80035	G-PRO LEVEL 120 cm - R.	CREAM
●	IJ80037	G-PRO LEVEL 120 cm - R.	GREY
○	IJ80039	G-PRO LEVEL 120 cm - R.	WHITE
●	IJ80041	G-PRO LEVEL 120 cm - R.	DARK

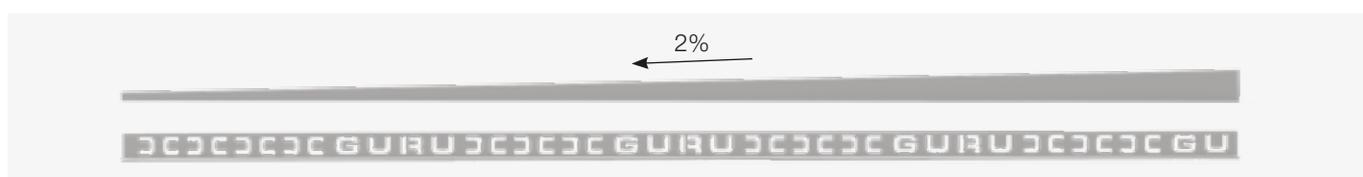

**NEW!**


## MADE-TO-MEASURE KIT TRYPHON BASE KIT + CHANNEL AND GRATE

Our base kit is a comprehensive solution that includes the Ruber drain, corner pieces, and the WATER-STOP waterproofing membrane. This set is the cornerstone for the drainage system. But it doesn't end there, as in addition to the base kit, you can choose from various sizes and finishes in our channel + grate options.

### TRYPHON BASE KIT (BOX 1)

Contains the trap body, waterproofing and accessories. Combine with a SHOWER CHANNEL + GRATE.

REF.	DESCRIPTION	MEASURE
IC30009	TRYPHON BASE KIT	3 m <sup>2</sup>
IC30010	TRYPHON BASE KIT	4 m <sup>2</sup>
IC30011	TRYPHON BASE KIT	5 m <sup>2</sup>
IC30009R	TRYPHON BASE KIT	3 m <sup>2</sup>
IC30010R	TRYPHON BASE KIT	4 m <sup>2</sup>
IC30011R	TRYPHON BASE KIT	5 m <sup>2</sup>
IC30009V	TRYPHON BASE KIT	3 m <sup>2</sup>
IC30010V	TRYPHON BASE KIT	4 m <sup>2</sup>
IC30011V	TRYPHON BASE KIT	5 m <sup>2</sup>

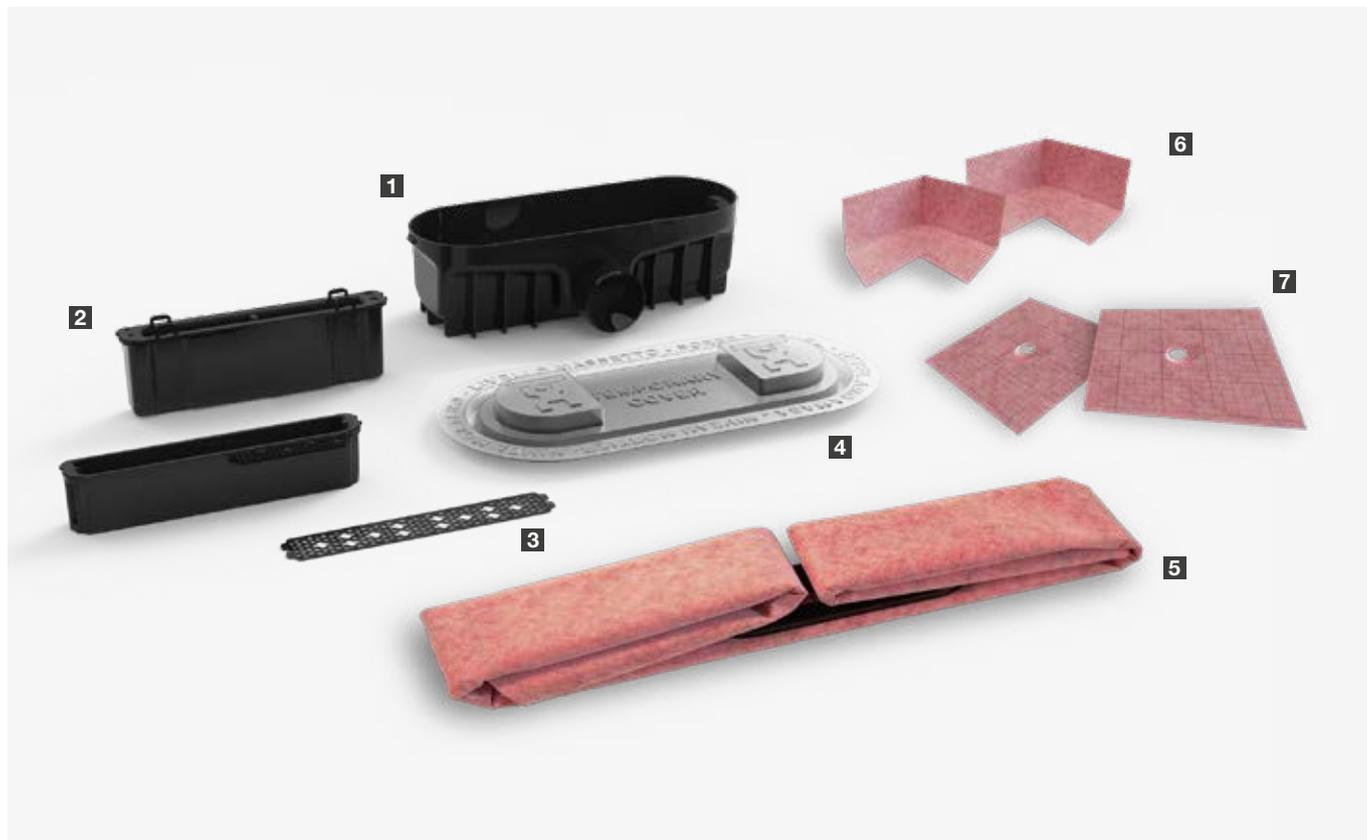

**1-** Drain of choice (TRYPHON, TRYPHON REDUCED or TRYPHON VERTICAL). **2-** Interchangeable siphon (hydraulic and dry). **3-** Hair collector. **4-** Mortar level cover. **5-** WATER-STOP membrane with thermosealed adapter. **6-** W-S DIN x2 (inside corners). **7-** W-S TUB x2 (pass-through pipes).

## CHANNEL + GRATE EVOLUX (BAG 2A - FOR TRYPHON DRAIN)


Combine the shower channel and grate of your chosen model with the Tryphon Base Kit.

FINISHED	REF.	MODEL	MEASURE (cm)
●	RT41000	LISA	60
●	RT41001	LISA	70
●	RT41002	LISA	80
●	RT41003	LISA	90
●	RT41004	LISA	100
●	RT41005	LISA	120
●	RT41150	LISA	150
●	RT41180	LISA	180
●	RT42000	PLUS	60
●	RT42001	PLUS	70
●	RT42002	PLUS	80
●	RT42003	PLUS	90
●	RT42004	PLUS	100
●	RT42005	PLUS	120
●	RT42150	PLUS	150
●	RT42180	PLUS	180
-	RT45000	INTEGRA	60
-	RT45001	INTEGRA	70
-	RT45002	INTEGRA	80
-	RT45003	INTEGRA	90
-	RT45004	INTEGRA	100
-	RT45005	INTEGRA	120
-	RT45150	INTEGRA	150
-	RT45180	INTEGRA	180
●	RT51000	LISA DARK	60
●	RT51001	LISA DARK	70
●	RT51002	LISA DARK	80
●	RT51003	LISA DARK	90
●	RT47000	MICROCEMENT	60
●	RT47001	MICROCEMENT	70
●	RT47002	MICROCEMENT	80
●	RT47003	MICROCEMENT	90
●	RT47004	MICROCEMENT	100
●	RT47005	MICROCEMENT	120

**REVOLUX GRATE (BAG 2B - FOR TRYPHON DRAIN)**

Grate of the chosen model, to be combined with the Tryphon Base Kit.

FINISHED	REF.	MODEL	MEASURE (cm)
	RT23004	CURVE CHROME	100
	RT63004	CURVE GOLD	100
	RT83004	CURVE ROSE	100
	RT53004	CURVE BLACK	100
	RT93004	CURVE NICKEL	100
	RT23200	CURVE CHROME	200
	RT63200	CURVE GOLD	200
	RT83200	CURVE ROSE	200
	RT53200	CURVE BLACK	200
	RT93200	CURVE NICKEL	200
	RT24004	CAVITY CHROME	100
	RT64004	CAVITY GOLD	100
	RT84004	CAVITY ROSE	100
	RT54004	CAVITY BLACK	100
	RT94004	CAVITY NICKEL	100
	RT24200	CAVITY CHROME	200
	RT64200	CAVITY GOLD	200
	RT84200	CAVITY ROSE	200
	RT54200	CAVITY BLACK	200
	RT94200	CAVITY NICKEL	200

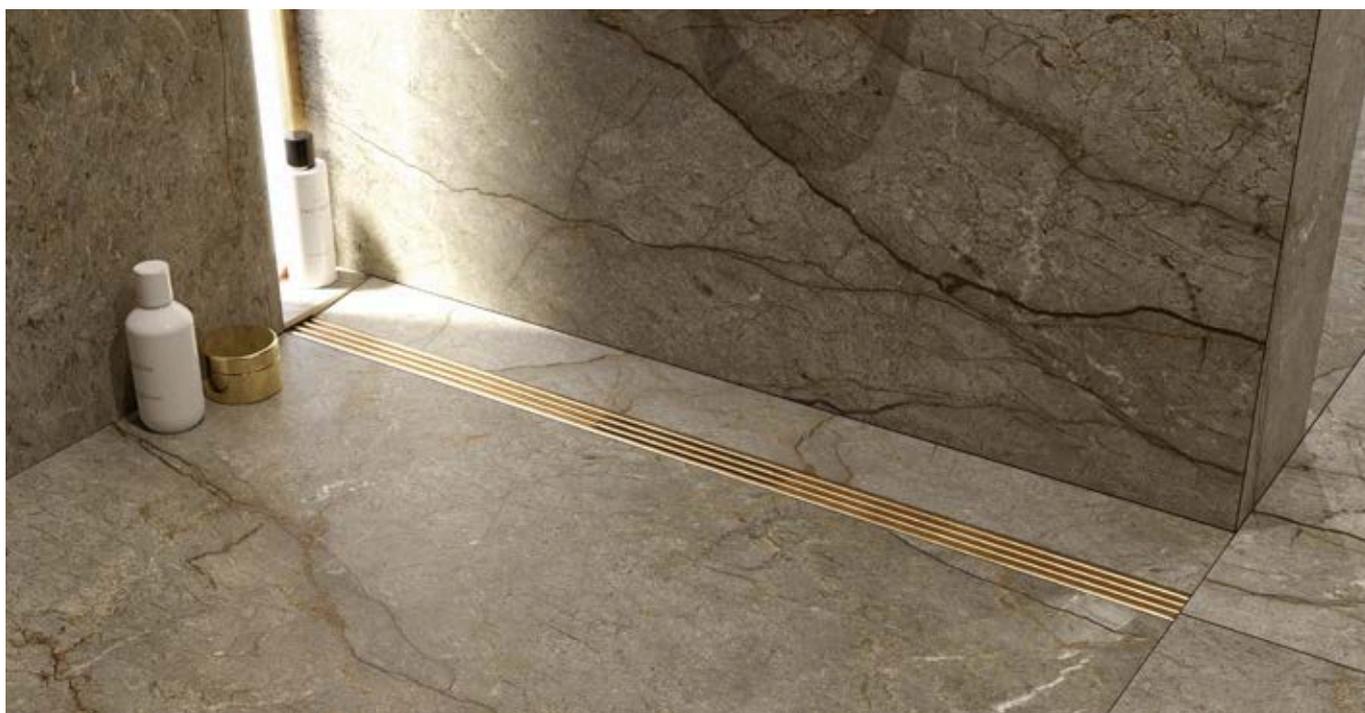

## MADE-TO-MEASURE KIT RUBER BASE KIT + CHANNEL AND GRATE

Our base kit is a comprehensive solution that includes the Ruber drain, corner pieces, and the WATER-STOP waterproofing membrane. This set is the cornerstone for the drainage system. But it doesn't end there, as in addition to the base kit, you can choose from various sizes and finishes in our channel + grate options.

### RUBER BASE KIT (BAG 1)

Contains the trap body, waterproofing and accessories. Combine with a SHOWER CHANNEL + GRATE.

REF.	DESCRIPTION	MEASURE
IC30003	RUBER BASE KIT	3 m <sup>2</sup>
IC30004	RUBER BASE KIT	4 m <sup>2</sup>
IC30012	RUBER BASE KIT	5 m <sup>2</sup>
IC30003R	RUBER BASE KIT	3 m <sup>2</sup>
IC30004R	RUBER BASE KIT	4 m <sup>2</sup>
IC30012R	RUBER BASE KIT	5 m <sup>2</sup>



1- Drain of choice (RUBER H50 o RUBER H28). 2- Ruber shower head. 3- Hair collector. 4- Mortar level cover. 5- Reducer Ø50/40 (Solo con RUBER H50)  
6- W-S DIN x2 (inside corners). 7- W-S TUB x2 (pass-through pipes). 8- WATER-STOP membrane with thermosealed adapter.

### CHANNEL + GRATE EVOLUX (BAG 2A - FOR RUBER DRAIN)

Combine the shower channel and grate of your chosen model with the Ruber Base Kit.

FINISHED	REF.	MODEL	MEASURE (cm)
●	ID30100	LISA	11,6 x 11,6
●	ID30200	LISA	15 x 30
●	ID30300	LISA	60
●	ID30400	LISA	70
●	ID30500	LISA	80
●	ID30600	LISA	90
●	ID30700	LISA	100
●	ID30800	LISA	120
●	ID31150	LISA	150
●	ID31180	LISA	180
●	ID30101	PLUS	11,6 x 11,6
●	ID30201	PLUS	15 x 30
●	ID30301	PLUS	60
●	ID30401	PLUS	70
●	ID30501	PLUS	80
●	ID30601	PLUS	90
●	ID30701	PLUS	100

**CHANNEL + GRATE EVOLUX (BAG 2A - FOR RUBER DRAIN)**

Channel and grate of the chosen model, to be combined with the Ruber Base Kit.

FINISHED	REF.	MODEL	MEASURE (cm)
●	ID30801	PLUS	120
●	ID32150	PLUS	150
●	ID32180	PLUS	180
-	ID30104	INTEGRA	11,6 x 11,6
-	ID30204	INTEGRA	15 x 30
-	ID30304	INTEGRA	60
-	ID30404	INTEGRA	70
-	ID30504	INTEGRA	80
-	ID30604	INTEGRA	90
-	ID30704	INTEGRA	100
-	ID30804	INTEGRA	120
○	ID40209	CRISTAL	15 x 30
○	ID40409	CRISTAL	70
○	ID40509	CRISTAL	80
○	ID40609	CRISTAL	90
●	ID50100	LISA DARK	11,6 x 11,6
●	ID50200	LISA DARK	15 x 30
●	ID50300	LISA DARK	60
●	ID50400	LISA DARK	70
●	ID50500	LISA DARK	80
●	ID50600	LISA DARK	90
●	ID37100	MICROCEMENT	11,6 x 11,6
●	ID37200	MICROCEMENT	15 x 30
●	ID37300	MICROCEMENT	60
●	ID37400	MICROCEMENT	70
●	ID37500	MICROCEMENT	80
●	ID37600	MICROCEMENT	90
●	ID37700	MICROCEMENT	100
●	ID37800	MICROCEMENT	120

## REVOLUX GRATE (BAG 2B - FOR RUBER DRAIN)

Grate of the chosen model, to be combined with the Ruber Base Kit.

FINISHED	REF.	MODEL	MEASURE (cm)
	ID23004	CURVE CHROME	100
	ID63004	CURVE GOLD	100
	ID83004	CURVE ROSE	100
	ID53004	CURVE BLACK	100
	ID93004	CURVE NICKEL	100
	ID23200	CURVE CHROME	200
	ID63200	CURVE GOLD	200
	ID83200	CURVE ROSE	200
	ID53200	CURVE BLACK	200
	ID93200	CURVE NICKEL	200
	ID24004	CAVITY CHROME	100
	ID64004	CAVITY GOLD	100
	ID84004	CAVITY ROSE	100
	ID54004	CAVITY BLACK	100
	ID94004	CAVITY NICKEL	100
	ID24200	CAVITY CHROME	200
	ID64200	CAVITY GOLD	200
	ID84200	CAVITY ROSE	200
	ID54200	CAVITY BLACK	200
	ID94200	CAVITY NICKEL	200



# MODULAR SYSTEMS

Innovative solutions designed to offer durability, strength, and ease of installation.





GURU  
waterproofing products

WATER-STOP  
A LAYER SUPERIOR TECHNOLOGY

GURU  
waterproofing products

GURU  
waterproofing products

GURU  
waterproofing products

GURU  
waterproofing products

CSTB

CSTB

GURU  
waterproofing products

GURU  
waterproofing products

GURU  
waterproofing products

CSTB

WATER-STOP  
A LAYER SUPERIOR TECHNOLOGY

WATER-STOP  
A LAYER SUPERIOR TECHNOLOGY

WATER-STOP  
A LAYER SUPERIOR TECHNOLOGY

CSTB

GURU  
waterproofing products

CSTB

WATER-STOP  
A LAYER SUPERIOR TECHNOLOGY

## DRY CONSTRUCTION PANEL W-S BOARD

**Waterproof and build simultaneously...  
Reduce time!**



PRODUCT			LOGISTICS	
REF.	DESCRIPTION	MEASURE	WEIGHT/ PANEL 	UDS/PALLET 
IM93018	W-S BOARD	2600 x 625 x 10	1,8	100
IM93019	W-S BOARD	2600 x 625 x 12,5	1,9	80
IM93020	W-S BOARD	2600 x 625 x 20	2,4	50
IM93021	W-S BOARD	2600 x 625 x 30	2,8	35
IM93022	W-S BOARD	2600 x 625 x 40	3,3	25
IM93017	W-S BOARD	2600 x 625 x 50	4	21

■ Installation accessories:

IG60026	200 SCREWS	-	-	-
IG60027	200 METAL WASHERS	-	-	-
IG60028	KIT 100 SCREWS AND 100 WASHERS	-	-	-



W-S BOARD is a waterproof drywall construction panel that is versatile, **easy to cut**, and adaptable to various construction scenarios. With a variety of thicknesses and sizes available, it is suitable for any project, from residential to industrial construction.

Its **waterproof** feature provides resistance to moisture and offers long-lasting protection against leaks and condensation. Furthermore, its **consistent flatness** ensures uniform finishes and a strong grip on the ceramic itself.

Thanks to its **lightweight** and dry installation system, it **speeds up the construction process**, reducing both time and installation costs.

### Features

- » Available sizes: 2600 x 625 mm
- » Available thicknesses: 10 - 12,5 - 20 - 30 - 40 - 50 mm
- » Easy to cut
- » Waterproof
- » Uniform flatness
- » Lightweight
- » Reduces installation time
- » Ideal for steam showers

### Specifications

- » Compression Strength: 400 KPA - 50 PSI
- » < 0.3 perms - ideal for steam shower



### Installation accessories:



SCREWS




METALIC WASHERS

**PREFABRICATED WASHBASIN WITH WALL MOUNTED TAPS W-S BASINK**

The W-S BASINK is a **prefabricated** sink, designed to be the standout piece in any bathroom. The W-S BOARD panels and our EVOLUX INTEGRA grille come together to create a fully **claddable** and completely **waterproof** sink.


The W-S BASINK features a 10 cm cuttable area, providing great **versatility for faucet installation**. This allows us to install the faucet directly on the sink or on the wall, adjusting to the desired size.

A unique element that allows for different installations: suspended, against three walls, in a corner, or on supports, all of which are elegant and creative options.

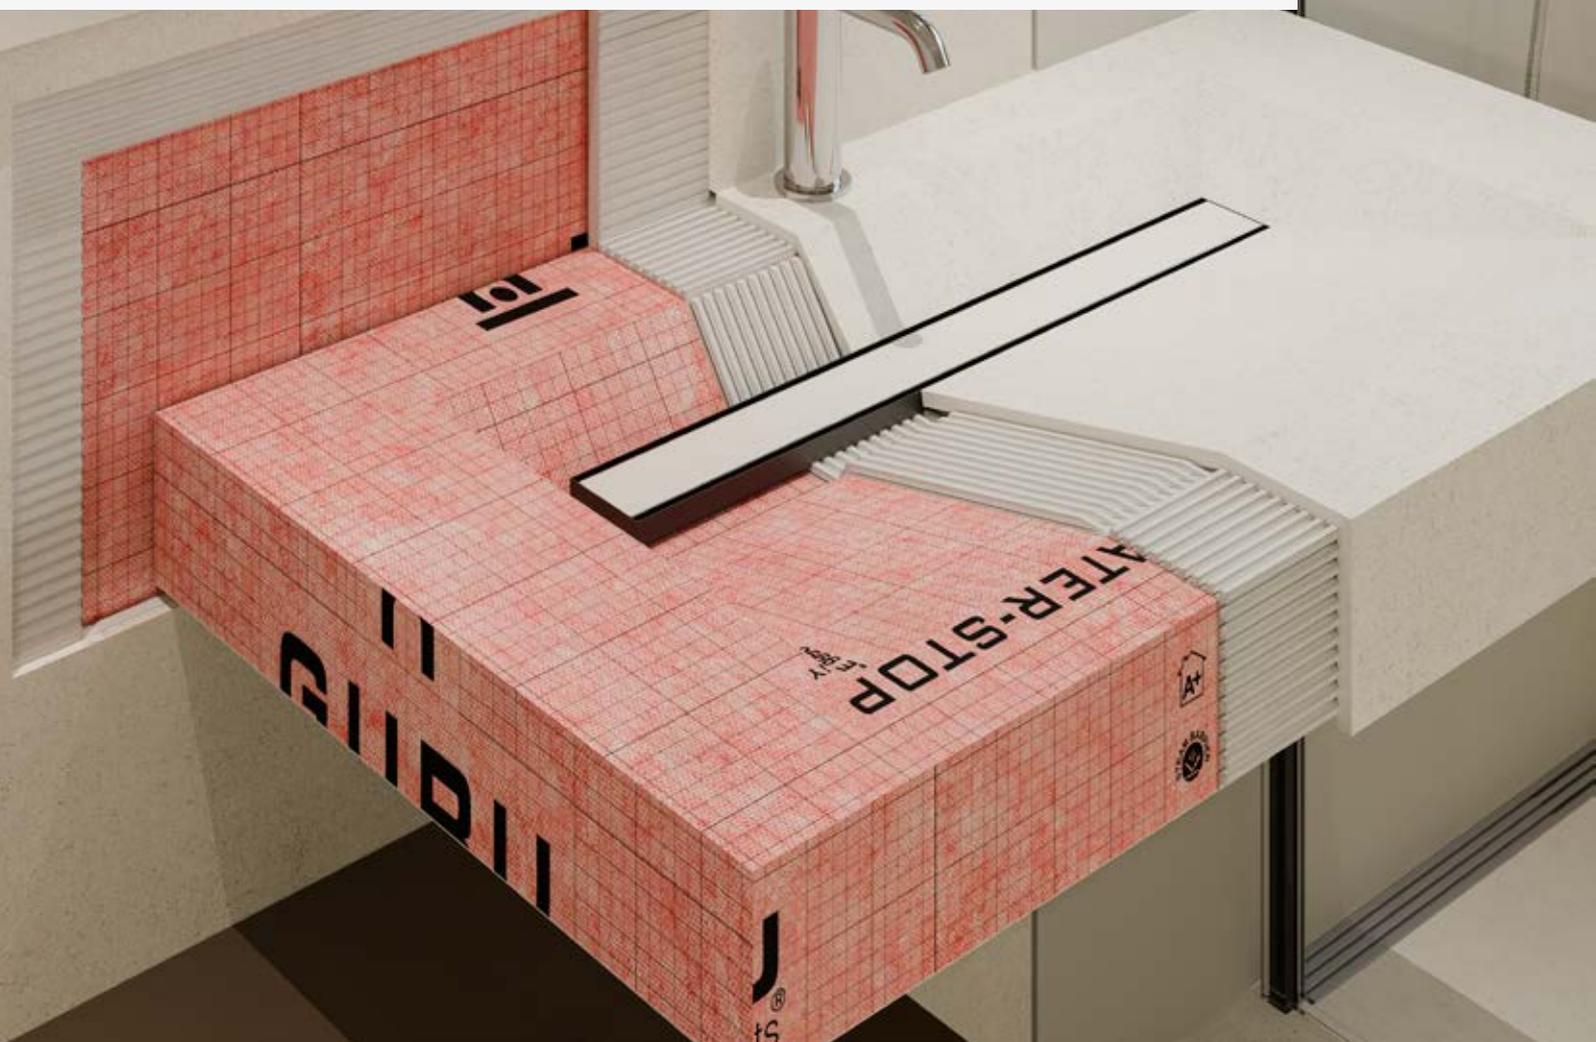

PRODUCT			LOGISTICS
REF.	DESCRIPTION	MEASURE	UDS/PALLET
IM04000	W-S BASINK	1000 x 555 x 106 mm	5 

### SUSPENDED INSTALLATION

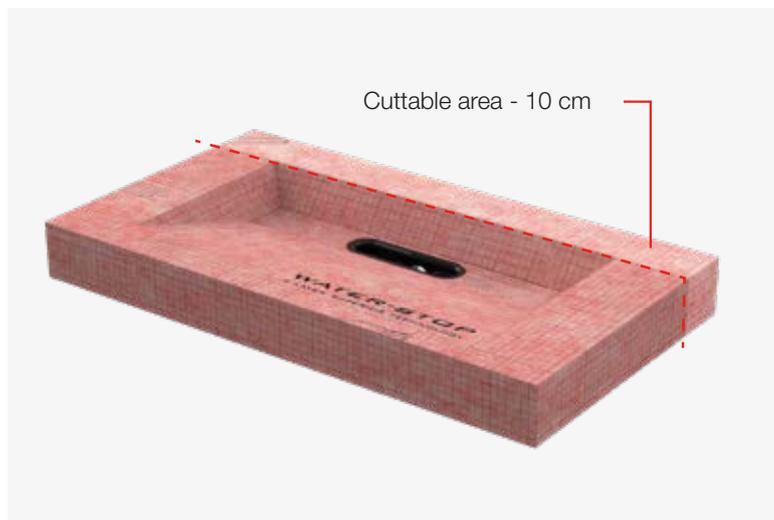

### INSTALLATION WITH SUPPORTS



**W-S BOARD.**  
Complementary accessory.  
Check prices p.118

### Features

- » Prefabricated and waterproof
- » Cutable
- » Claddable
- » Adaptability to installation
- » Two faucet options: wall-mounted or integrated
- » Leveling system to facilitate installation

### Specifications


- » Dimensions: 1000 x 555 x 106 mm
- » Supports a load of 180 kg
- » Drainage flow rate up to 47 L/min
- » Sifón extraíble
- » Two siphon options: hydraulic and dry
- » Vertical outlet Ø50 mm
- » Connection with pressure seal
- » Vertical adjustment

### The system includes



- 1- Prefabricated sink W-S BASINK with drain TRYPHON VERTICAL incorporated.  
2- Metal reinforcement with WATER-STOP 3- Channel and grade EVOLUX INTEGRA with two drain options (hydraulic and dry) y hair collector. 4- Grate remover. 5- Extendable load supports. 6- Countersunk screws M6 (x4). 7- Set screws (x4). 8- W-S MASTIC 290 ml. 9- W-S BASINK box. 10- QR code with cutting templates.

PREFABRICATED SINK **W-S SINK**

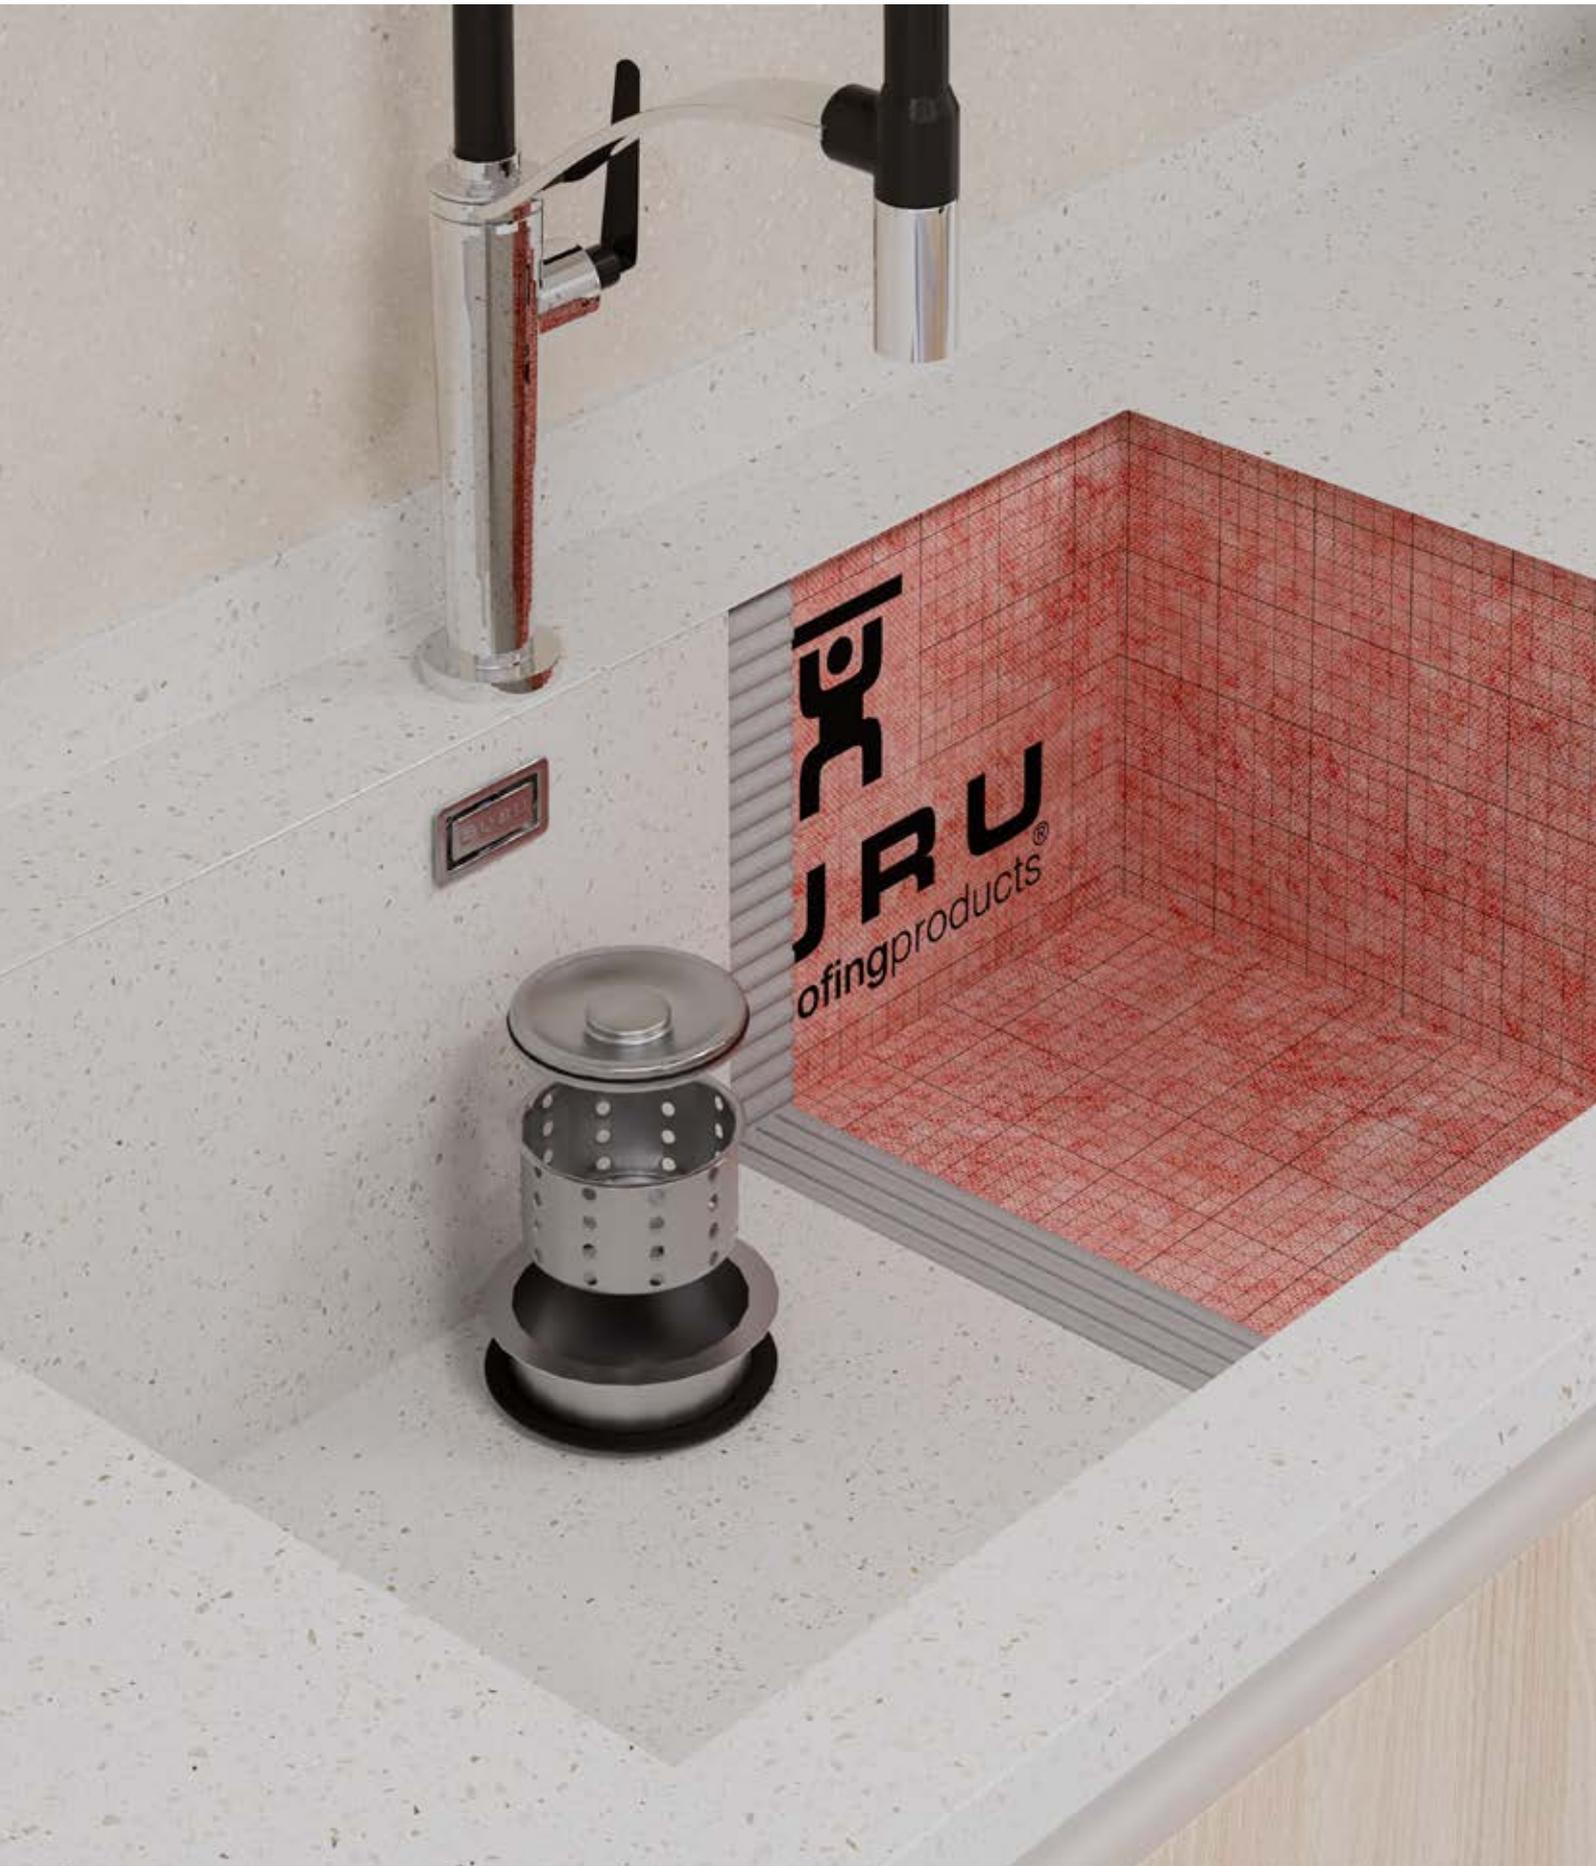

The W-S SINK is a **waterproof** kitchen sink made with our W-S BOARD panels, ensuring waterproofing and **greater durability**. The sink features a pre-inclined base and comes **ready for installation**, with an interior that can be **directly tiled** with ceramic tiles or microcement.


In addition, the size of the sink provides a large washing area on the countertop, ensuring easy faucet installation. It features an elegant stainless steel detail on the overflow. W-S SINK is the sink that will set apart any kitchen or washing area.

### Features

- » Prefabricated and waterproof
- » Ready to be cladded
- » Adaptability to installation

### Specifications

- » External dimensions: **750 x 450 x 240 mm**
- » Internal slopes of 1,5%
- » Two layers of W-S BOARD (interior and exterior)

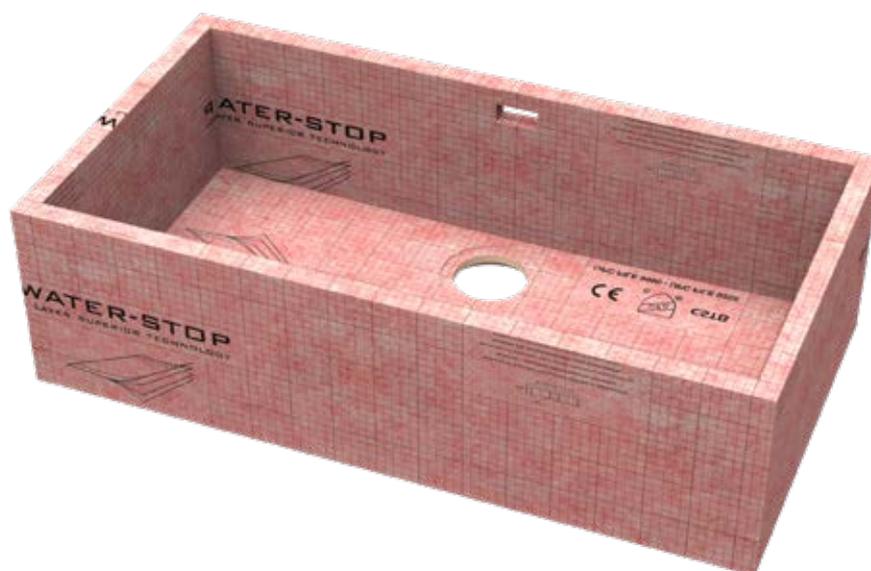

PRODUCT			LOGISTICS
REF.	DESCRIPTION	MEASURES	UDS/PALLET
IM04001	W-S SINK	750 x 450 x 240 mm	12 


PREFABRICATED NICHE **W-S NICHE**



PRODUCT				LOGISTICS
REF.	DESCRIPTION	SHELF	MEASURES	UDS/PALLET 
IM50002	W-S NICHE	INCLUDED	300 x 710 x 90 mm	44

W-S NICHE is a shower niche designed to offer a practical and durable solution for any shower space. Made with a **rigid XPS foam core** and covered on both sides with WATER-STOP technology, ensuring total **waterproofing**.

Its **pre-inclined base at 1.5%** ensures efficient drainage, while its internal dimensions match the **standard size of ceramic tiles**, eliminating the need for unsightly cuts. Additionally, it includes a 25 mm interior shelf, adjustable in installation height to **maximize usable space**.

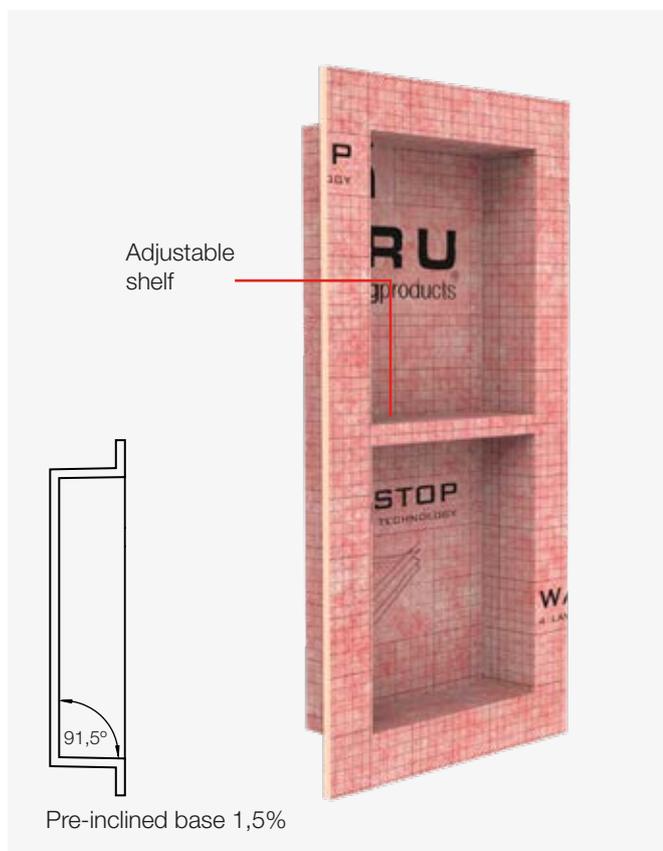


### Features

- » Rigid XPS foam core
- » Prefabricated and waterproof
- » Completely claddable
- » Horizontal or vertical position
- » Adjustable shelf


### Specifications

- » Inside measurements: **30 x 71 x 9 cm**
- » Inside shelf 25 mm
- » Pre-inclined base: 1,5%
- » Watertight structure bonded with polyurethane

### The system includes

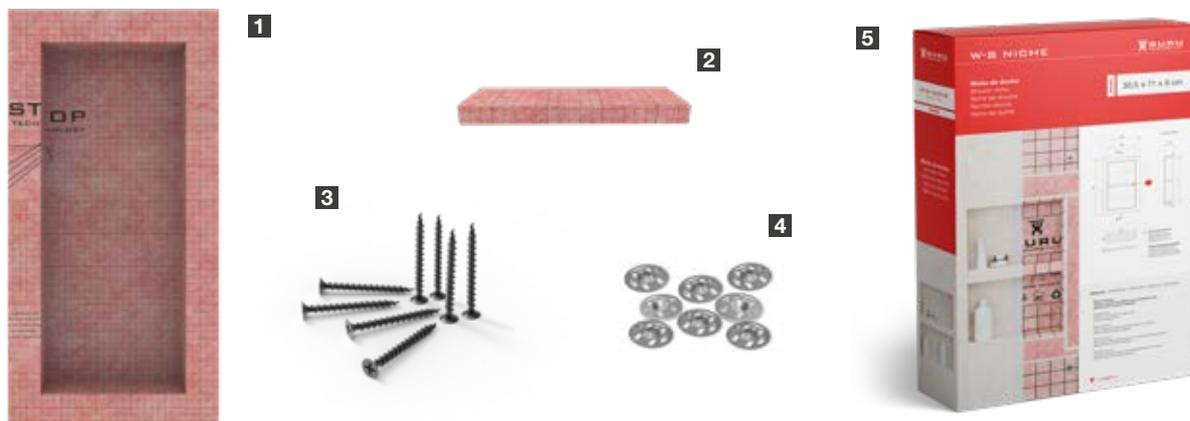


1- Prefabricated niche W-S NICHE. 2- Shelf. 3- Screws (x8). 4- Metal washers (x8). 5- W-S NICHE box.

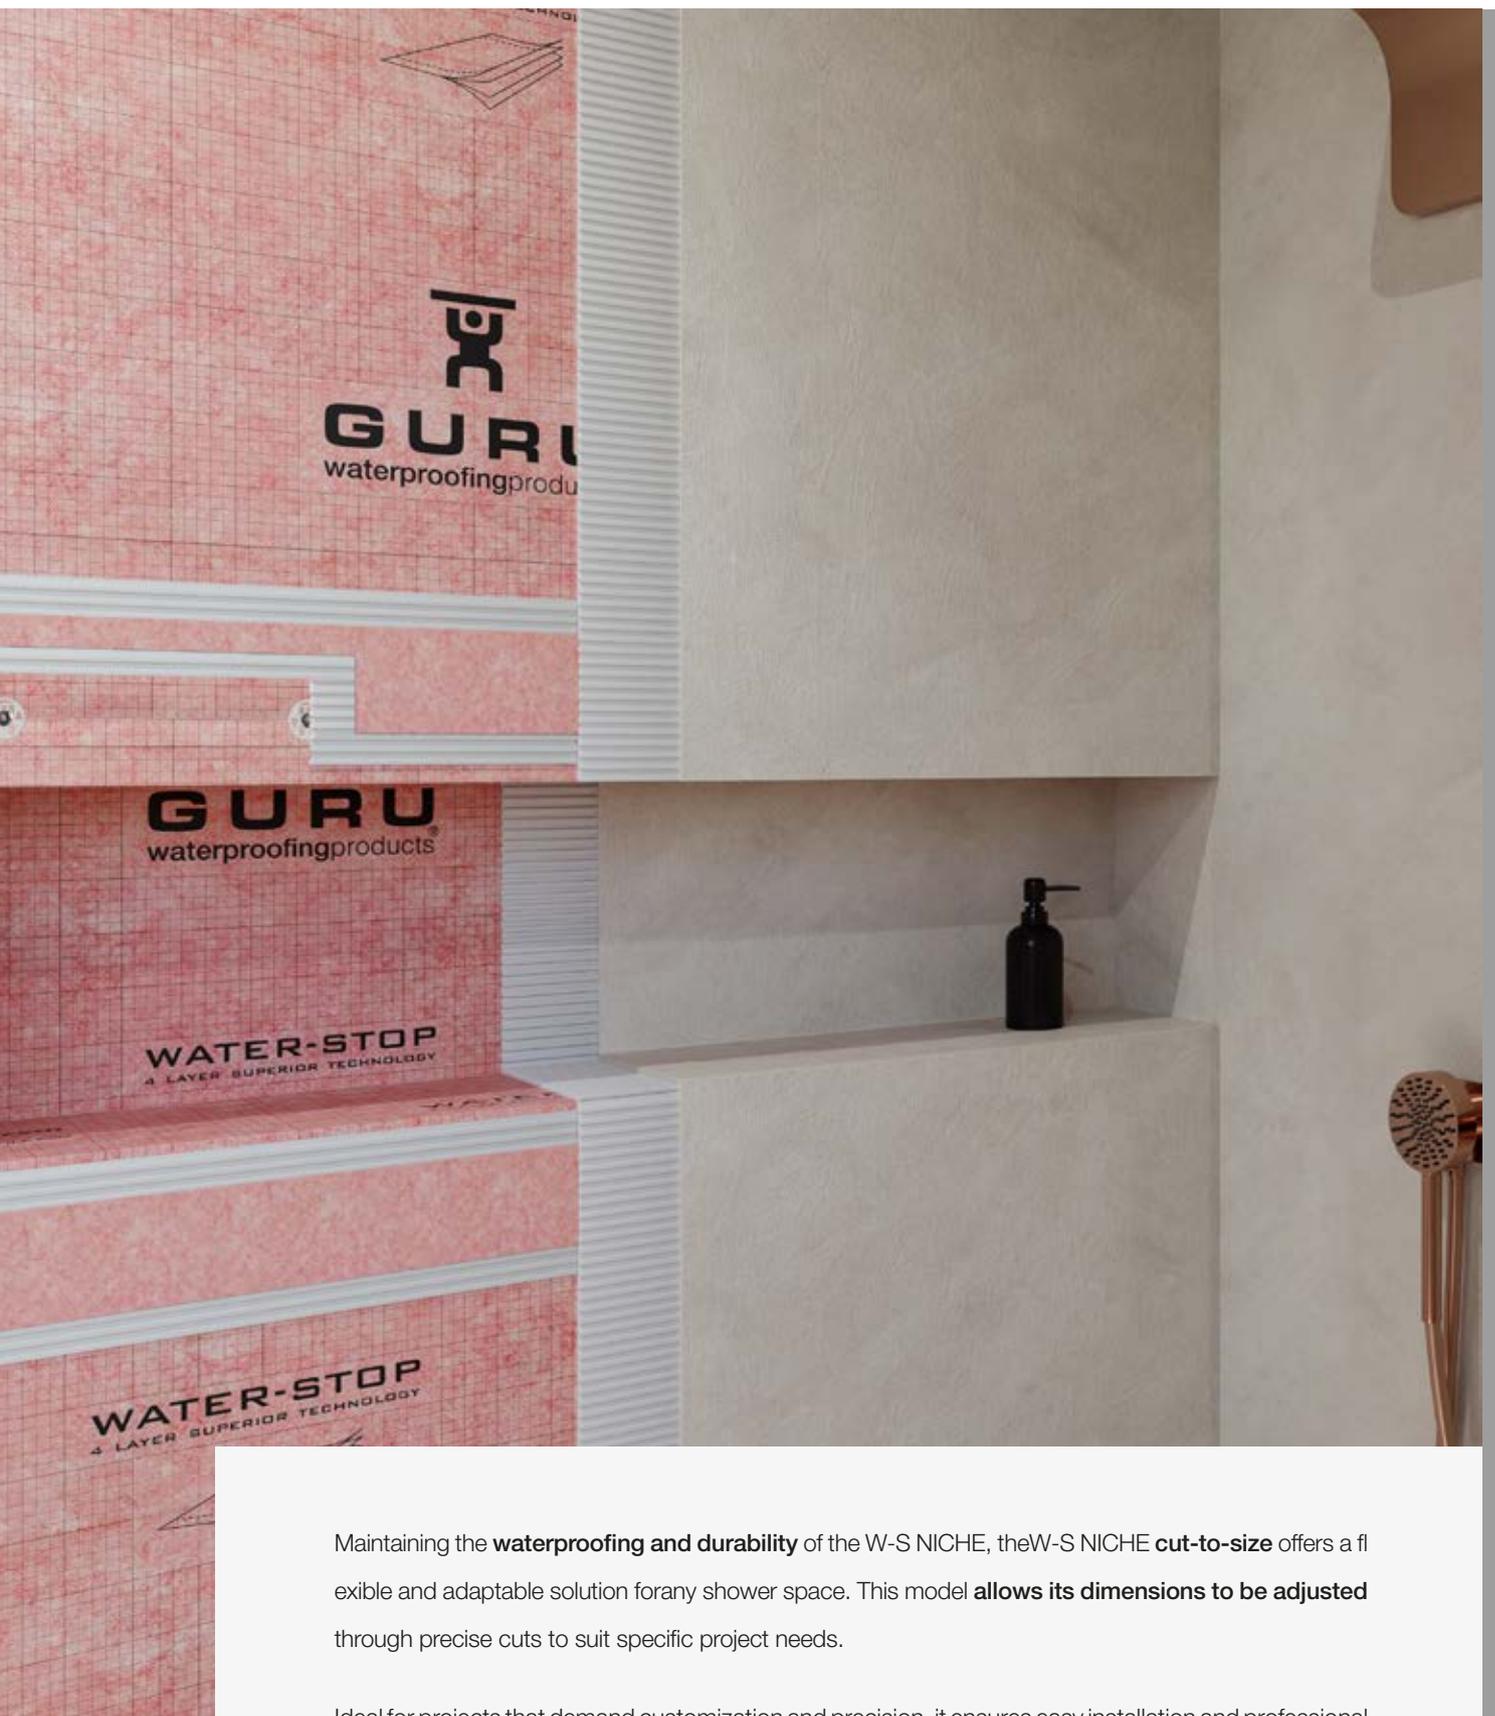FIT TO SIZE SHOWER NICHE **W-S NICHE**

Maintaining the **waterproofing and durability** of the W-S NICHE, the W-S NICHE **cut-to-size** offers a flexible and adaptable solution for any shower space. This model **allows its dimensions to be adjusted** through precise cuts to suit specific project needs.

Ideal for projects that demand customization and precision, it ensures easy installation and professional results without compromising quality.



Pre-inclined base 1,5%

**Features**

- » Adaptability to installation
- » Waterproof
- » Tileable
- » Easy to cut with a utility knife

**Specifications**

- » Maximum length: 140 cm
- » Internal height without coating: 40 cm
- » Pre-inclined base 1,5%
- » Requires support structure

**Sistema recortable:**



ADJUST MEASUREMENTS



FOLD AND ASSEMBLE



PLACE AND GLUE THE COVERS WITH SEALANT ADHESIVE

PRODUCT		LOGISTICS
REF.	DESCRIPTION	UDS/PALLET
IM50020	W-S NICHE FIT TO SIZE	 40



SUPERKIT, a **complete prefabricated sloped shower system**, provides everything you need for a hassle-free installation (except tile and cement) in one box. Its intuitive design makes it incredibly **easy and quick to install**, and the tray can be **easily cut**, ensuring adaptability to the space.

The included shower tray allows for a customized finish as it is **tileable**, which, combined with the two grate options - REVOLUX or EVOLUX INTEGRA - adds versatility and aesthetic appeal. Simplify your bathroom project with SUPERKIT and enjoy an efficient, hassle-free installation in record time.

### Features

- » Waterproofing membrane with wall upturn
- » Easy installation
- » Simple to cut with a utility knife
- » Adjustable sizing
- » State-of-the-art drainage system
- » Uniform slope
- » Fully tileable option (INTEGRA grate)

### Specifications

- » Pre-inclined shower tray 2%
- » High drainage flow: 49 L/min
- » High-density polyurethane, highly durable

## ¡ADAPTABLE!

95 - 80 x 152 - 145 cm



A Cut-out area

B Wall waterproofing

### Two grid options:



EVOLUX INTEGRA




REVOLUX

# FULL SHOWER SYSTEM SUPERKIT

Superkit - Revolux

## Revolux Cavity Chrome

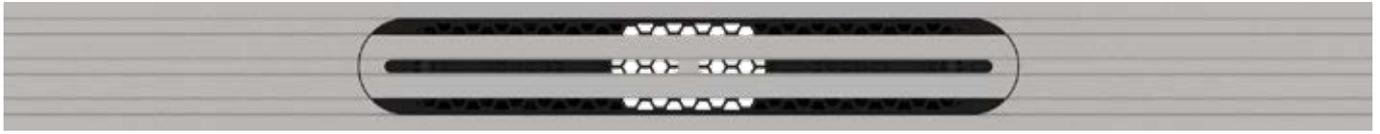

PRODUCT					LOGISTICS
FINISHED	REF.	DESCRIPTION	GRATE	MEASURE	UDS/PALLET 
	IS00001	SUPERKIT	REVOLUX CAVITY CHROME	100 cm	13

### The system includes



**Complementary accessories:** Consult custom manufacturing



Tryphon Reduced Siphon Trap  
\*Check price page 58





Tryphon Vertical Siphon Trap  
\*Check price page 58



G-PRO LEVEL  
\*Consult custom manufacturing

### \*Installation height:

TRYPHON	TRYPHON REDUCED	TRYPHON VERTICAL
		
88 mm	70 mm	83 mm

- 1- Cut-to-size shower tray W-S READY SHOWER 95-85 x 152-145 cm.
- 2- WATER-STOP membrane 1 x 10 m.
- 3- TRYPHON drain, dry or hydraulic, installation protective cover and hair collector.
- 4- W-S MASTIC 290 ml
- 5- SAFETUB Ø32-50 cm x2 (Adjustable pipe reinforcement).
- 6- W-S DIN x4 (inside corners).
- 7- REVOLUX CAVITY CHROME grate 100 cm and end caps.
- 8- Installation gauge.
- 9- Superkit box.

# FULL SHOWER SYSTEM SUPERKIT

Superkit - Integra

Evolux Integra Force



PRODUCT					LOGISTICS
FINISHED	REF.	DESCRIPTION	GRATE	MEASURE	UDS/PALLET 
-	IS45001	SUPERKIT	EVOLUX INTEGRA	70 cm	13
-	IS45002	SUPERKIT	EVOLUX INTEGRA	80 cm	13
-	IS45003	SUPERKIT	EVOLUX INTEGRA	90 cm	13

The system includes



**Complementary accessories:**



Tryphon Reduced Siphon Trap  
\*Check price page 58





Tryphon Vertical Siphon Trap  
\*Check price page 58



G-PRO LEVEL  
\*Consult custom manufacturing

**\*Installation height:**

TRYPHON	TRYPHON REDUCED	TRYPHON VERTICAL
		
93 mm + PAVEMENT	74 mm + PAVEMENT	88 mm + PAVEMENT

1- Cut-to-size shower tray W-S READY SHOWER 95-85 x 152-145 cm. 2- WATER-STOP membrane 1 x 10 m. 3- TRYPHON drain, dry or hydraulic, installation protective cover and hair collector. 4- W-S MASTIC 290 ml 5- SAFETUB Ø32-50 cm x2 (Adjustable pipe reinforcement). 6- W-S DIN x4 (inside corners). 7- EVOLUX INTEGRA grate (size to choose) 8- Superkit box.

# GURU CUSTOMISED





### **GURU CUSTOM-MADE**

We can customise the shower grates with your logo, brand, city... whatever design is required to create a unique experience for your hotel!

### **GIVE IT A PERSONAL TOUCH!**

Estil Guru creates custom projects to enhance the hospitality experience. Our focus is on two crucial aspects: structural waterproofing and customising bathrooms with high-end showers.

During the waterproofing phase, Estil Guru will conduct a thorough evaluation of the structure, identifying vulnerable areas and preventing any moisture-related issues. Simultaneously, we will analyse the requirements and products that are most appropriate for each situation: Bathroom, spa, shower, terrace, room, deck, patio, swimming pool...

Our focus is also on shower systems, creating modern and personalised spaces to provide unique experiences. This statement highlights not only our dedication to creating modern, leak-free bathrooms but also our commitment to sustainability and competitive differentiation in the shower and waterproofing sector.

Additionally, we would like to emphasise the meticulous planning of our technical team. They carefully schedule all tasks to minimise any inconvenience to our clients and prepare the budget with a commitment to providing the best value for money and the highest quality.

# GURU SANITARY

## GURU IN HOSPITAL AND NURSING HOME PROJECTS

We design bespoke, integrated projects for hospitals and care homes. Our focus is on the construction and renovation of essential spaces. We ensure durability and resistance by waterproofing all necessary areas. Additionally, we design modern and functional bathrooms and communal areas.

Our approach centres around waterproofing, which involves a thorough assessment of structures. We conduct customised studies to identify vulnerable areas and prevent leaks and damp-related problems. We then recommend the best solution for each case.

Our innovative shower systems, including waterproofing with Evolux Vinyl, set us apart in the industry. This shower system is designed and manufactured to be integrated into vinyl floors of hospitals and nursing homes, ensuring waterproofing and high drainage effectiveness.

At Estil Guru, every project is a testament to our dedication to quality, sustainability, and elevated comfort. We strive to create spaces that make a difference in everyday life.

\*See page 90 for more details.





**JEL**  
**GURU**  
waterproofing membrane

CE CSTB  
UPC FILE 9999 - UPC FILE 9205  
A+

## TEAM GURU


**Not following us on social media yet? Find us on Instagram, Facebook, LinkedIn, and YouTube.**

We help you grow! Share photos of our products and tag us @estilguru, and we'll help you gain greater reach on your social media.

We're building an amazing TEAM GURU eager to meet you. Are you in?



NEW WEB!

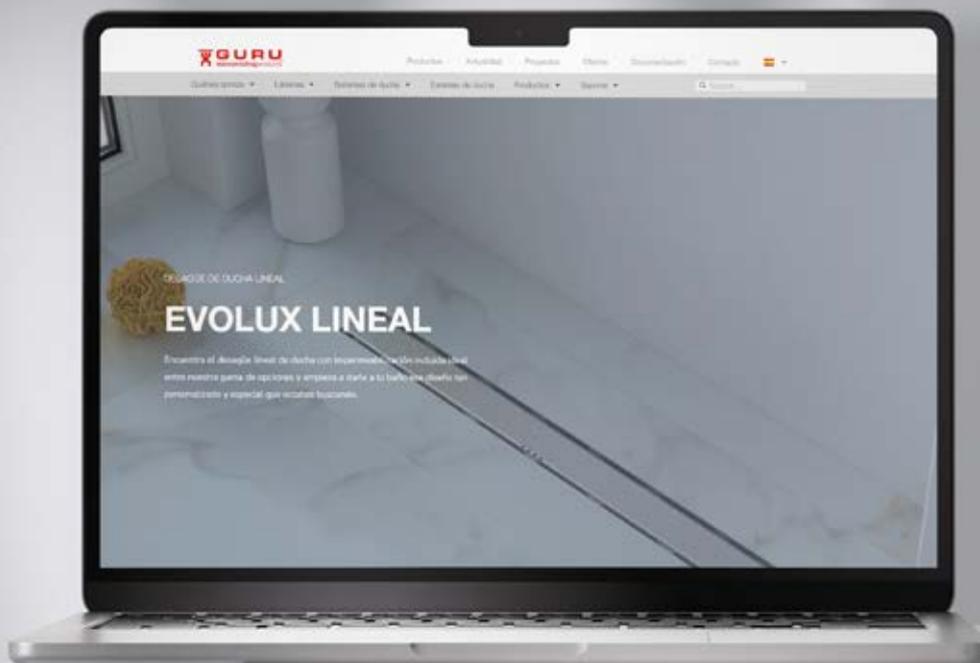

## **ESTIL GURU SLU**

Pol. Ind. El Pla, C/ Dels Telers 22, 46870, Ontinyent

Valencia, ESPAÑA

Tel.: 96 291 45 11

[guru@estilguru.com](mailto:guru@estilguru.com)

[www.estilguru.com](http://www.estilguru.com)

